



How tall should the mech / elec bay be?

Red = the thing to decide. Gray = everything else, as drawn (A-201 Rev K / A-901 Rev F). Pick (a), (b) or (c) below.

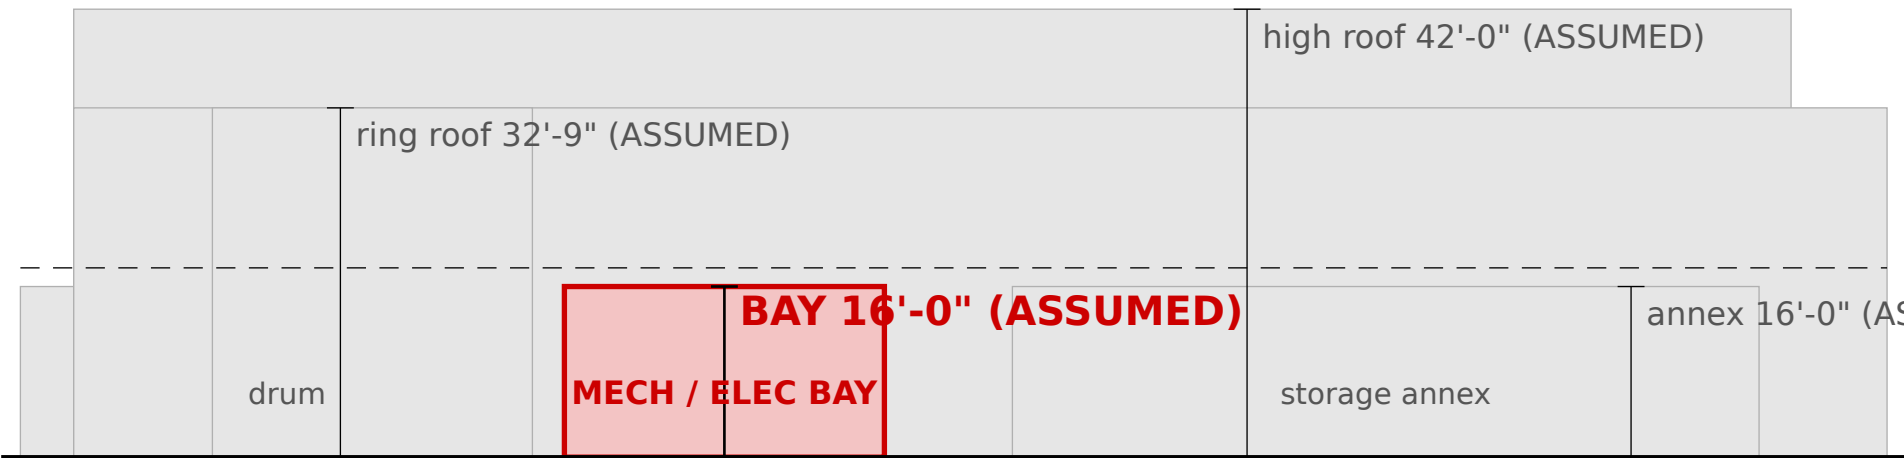

NORTH ELEVATION, CLOSE-UP (east on the left) · not to scale

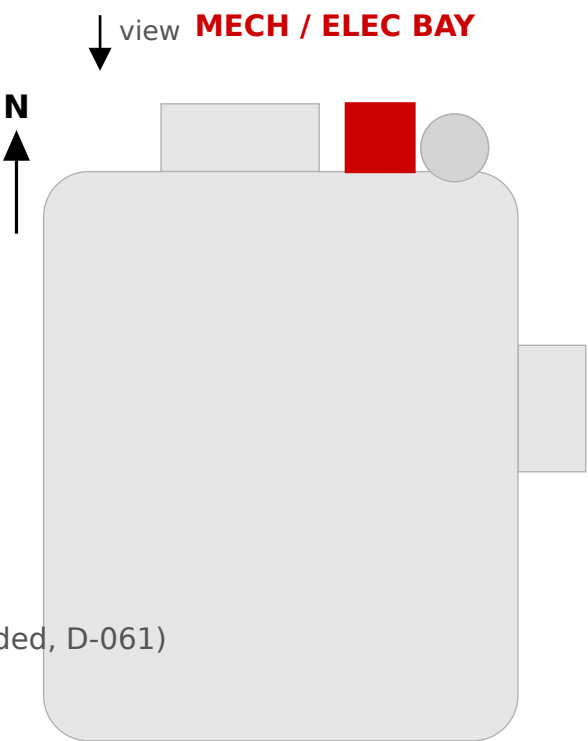


KEY PLAN (P2-A-101 Rev N) · not to scale
looking south at the north side

WHAT'S FIXED / WHAT'S ASSUMED


- L2 floor 17'-9": decided (D-061).
- Ring roof 32'-9", high roof 42'-0": ASSUMED.
- Annex 16'-0": ASSUMED (one storey, D-067).
- Bay 30' x 30' (D-081); height ASSUMED, no MEP input yet.
- Heights in the choices are examples, ASSUMED.

CHOICES

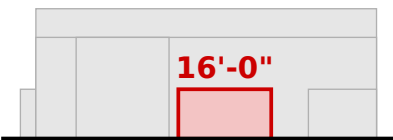


(a) 16 ft, as drawn

Matches the annex. Least wall, lowest cost.
Own low roof drains on its own.

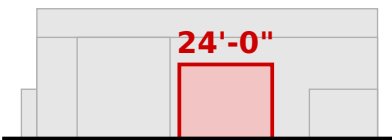

(b) 24 ft, taller (ASSUMED)

Only if MEP equipment needs it (TBD). More
wall and cost. Still a low roof.

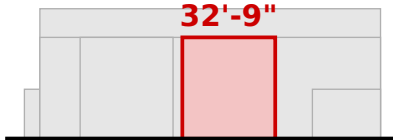

(c) 32.75 ft, flush with ring

Most wall and cost. Reads as part of the ring.
Roof drains with the ring roof (TBD).

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	STUDY: MECH / ELEC BAY HEIGHT (to decide)	NTS	October 2026	STUDY	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-SK-01