



How tall should the NE stair drum be?

Red = the thing to decide. Gray = everything else, as drawn (A-201 Rev K / A-901 Rev F). Pick (a), (b) or (c) below.

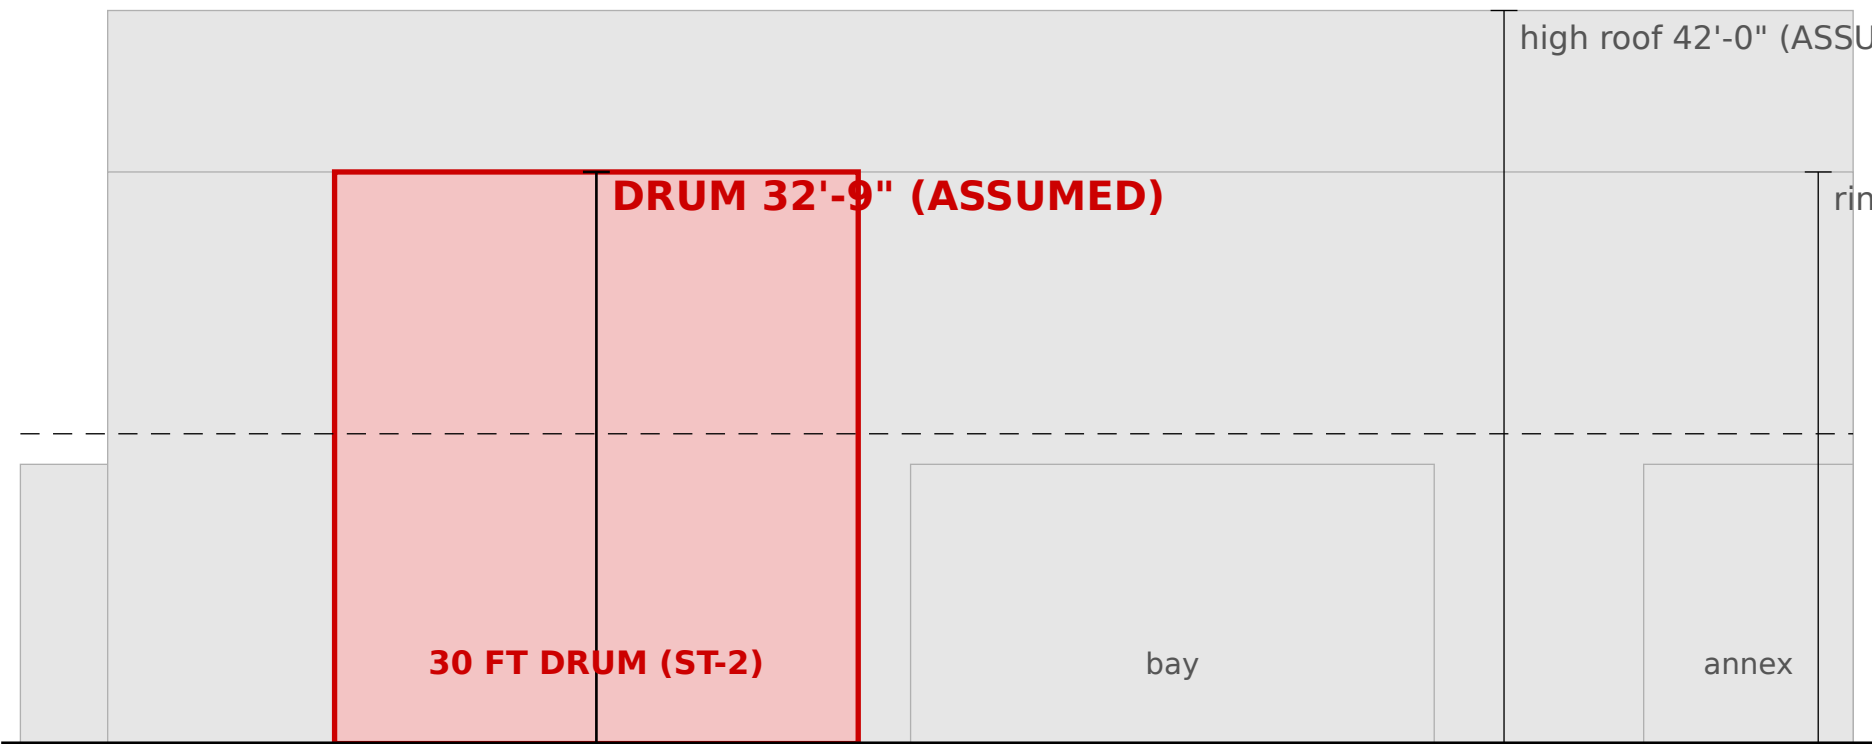

NORTH ELEVATION, CLOSE-UP (east on the left) · not to scale

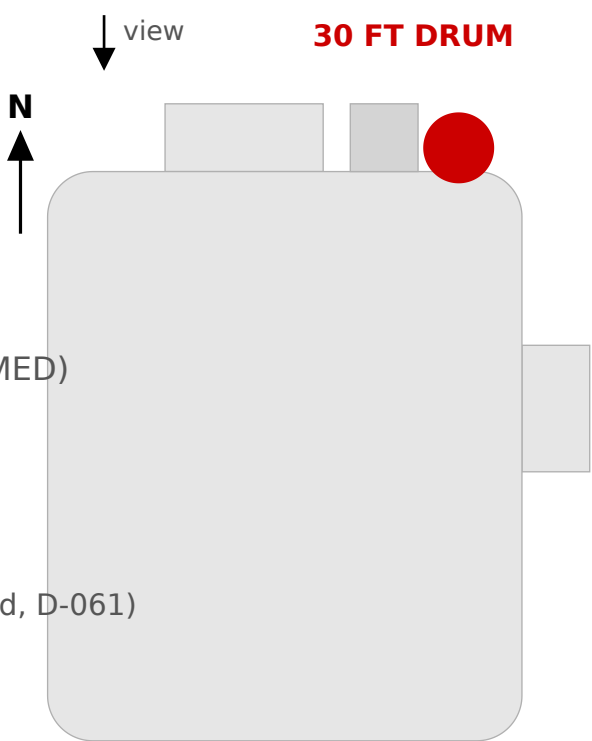


KEY PLAN (P2-A-101 Rev N) · not to scale
looking south at the north side

WHAT'S FIXED / WHAT'S ASSUMED


- L2 floor 17'-9": decided (D-061).
- Ring roof 32'-9", high roof 42'-0": ASSUMED.
- Annex 16'-0": ASSUMED (one storey, D-067).
- Drum 30 ft across (D-082); height ASSUMED.
- Stair to the roof: IBC 2021 1011.12 requires it only for 4 or more stories above grade plane. This building has 2, so not by that section (verify with the AHJ, D-008). Rooftop equipment access: IMC 2021 306.5 (a permanent ladder may serve). TBD.

CHOICES

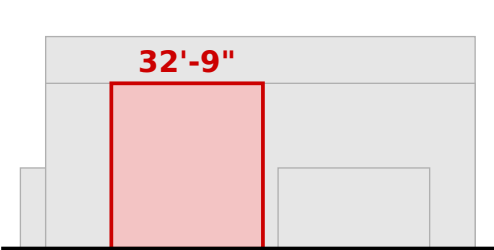


(a) flush with ring roof, as drawn

Quiet; drum reads as a curve on the corner only.

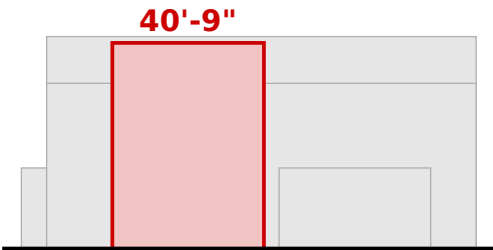

(b) tower, +8 ft (ASSUMED)

Corner marker in the SRM HQ style (D-074). More wall, cost, flashing.

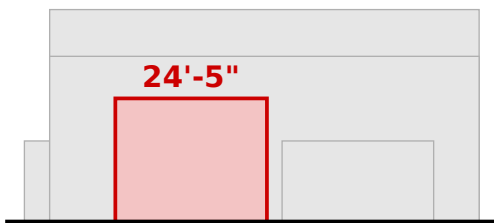

(c) stop at the stair (24.4 ft)

L2 17.75 + 80 in headroom (IBC 2021 1011.3) + roof TBD. Only if no stair to the roof.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	STUDY: NE DRUM HEIGHT (to decide)	NTS	October 2026	STUDY	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-SK-02