

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 1 — OVERALL FLOOR PLAN (REV M)

Rev L (29 ft drum, D-081) with the drum at 30 ft (D-082) and the east side back to plan Rev J (D-084 = D-072 core 2, as frozen in Set Rev D). Rev L drum and Rev L bump-out position shown dashed.

CHANGES FROM REV L (all ASSUMED unless cited)

- ST-2: 30 ft drum, same centre (182, 262.5), west edge x 167. Stair fit 1.49 ft spare on the diagonal (Rev L 0.49). +35 SF on this level. X6 on the east face (197, 262.5).
- Bay stays at x 134-164: 3.0 ft to the drum; EXIT (N) at X5 keeps the 12 ft lane.
- East side = plan Rev J (D-072): core 2 bump-out 30 x 56 ft at y 119.09-175.09 (42 ft south), 8 ft PUBLIC CORRIDOR (E) x 202-210, MEN (2) 25 + DF / JAN. 27 in the old MECH (E) strip, WOMEN (2) 26 + MECH (E2) 28 in the bump-out, MECH (E) 1,720 -> 675, X7 back on the wall, new X11.

ROOMS CHANGED (SF net of stairs, inside the envelope)

TAG	ROOM	REV L	REV M	CHANGE
15	MECH (N)	571	564	-8
16	MECH (E)	1,720	675	-1,045
25-27 Restroom pop-out block (Rev L)		1,680	0	-1,680
25	MEN (2)	0	364	+364
26	WOMEN (2)	0	1,020	+1,020
27	DF / JAN.	0	56	+56
28	MECH (E2)	0	660	+660

Net of stairs. Core 2 keeps 1,680 SF in the bump-out; the corridor (8 x 78.18 ft) and MEN (2) / DF come out of MECH (E). Old NE stair strip inside the box (about 67 SF) stays unassigned.

AREA CHECK (no SF cap, D-056; L1, L2, total vs last rev, D-057)

	REV L / H	REV M / I	CHANGE
L1 footprint (envelope + annex + bay + bump-out)	57,861	57,896	+35
L2 area (envelope - open-to-below)	29,033	29,068	+35
TOTAL GSF	86,894	86,964	+70

L1 = envelope polygon 53,216 SF + annex 2,100 + bay 900 + bump-out 1,680. L2 = envelope - open-to-below 24,148 SF (Rev G method, D-079). Rev L / H recomputed = P2-G-003 Rev L. Vs Set Rev D and program lines: P2-G-003 Rev M.


ROOM SCHEDULE — LEVEL 1 (SF net of stairs, Rev M)

1	BOYS LOCKER	3,507	13	EVENT LOCKER 3	900
2	GIRLS LOCKER	3,507	14	EVENT LOCKER 4	900
3	MECH / ELEC (NW)	931	15	MECH (N)	564
4	MEN	700	16	MECH (E)	675
5	WOMEN	1,150	22	MECH (NE)	505
6	FIRST AID	120	23	FLEX / STORAGE	972
7	VESTIBULE	520	24	CHAIR / TABLE / STAGE STORAGE	2,100
8	CONCESSION	275	25	MEN (2)	364
9	EQUIP. STORAGE	700	26	WOMEN (2)	1,020
10	EQUIP. ROOM	300	27	DF / JAN.	56
11	EVENT LOCKER 1	900	28	MECH (E2)	660
12	EVENT LOCKER 2	900	29	MECH / ELEC BAY	900

OPEN (not decided here)

- East exits (Rev D method): X7 path 133 ft, women (2) common path 61 ft, men (2) 30 ft (75 ft max), corridor dead end 5.2 ft. Details: P2-G-003 Rev M.
- Structure of the curved shell and the 30 ft drum; tier depth 1'-6" or less (D-061). X7 / X11 discharge TBD (D-006).
- SRM / Summertown Metals roles are not agreed; names are descriptive, no marks used (D-042).

Sources: params/phase2_plan_rev_j.yaml (= ARENA Set Rev D A-101 J); phase2_plan_rev_k.yaml; phase2_plan_rev_m.yaml; D-072, D-077..D-084.

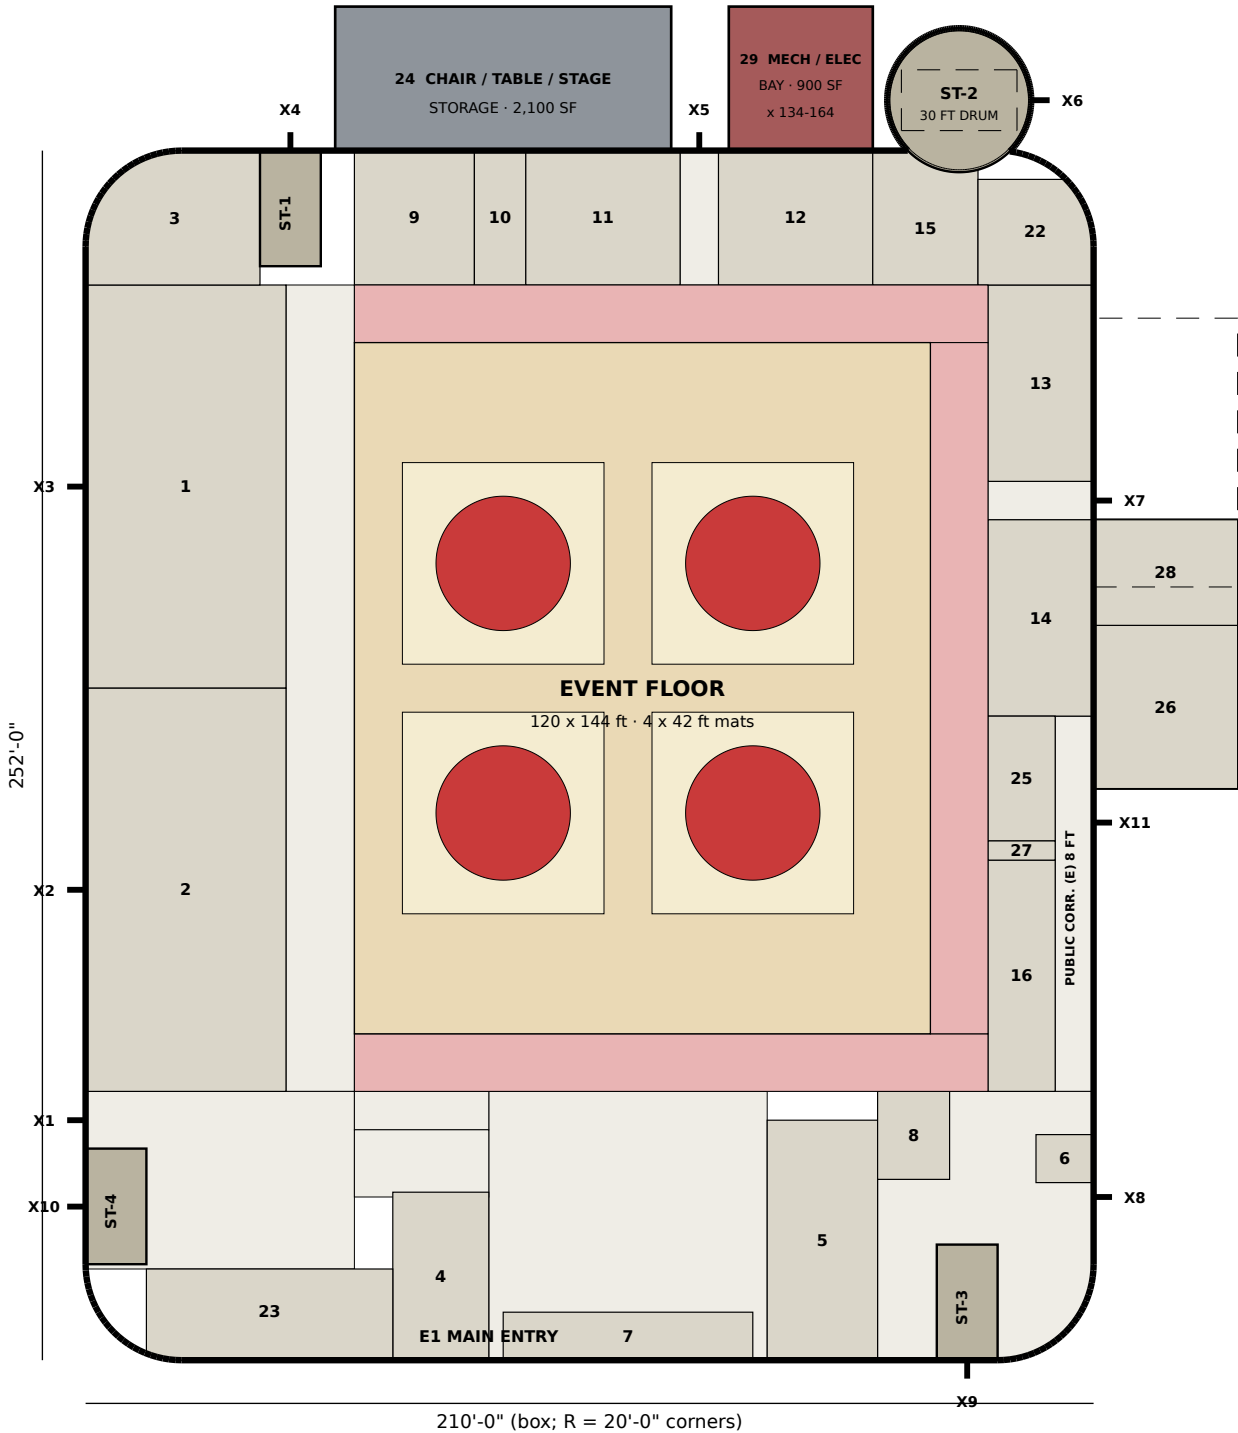

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE PHASE 2	SHEET TITLE OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	SCALE 1" = 40'-0"	DATE October 2026	REV M	DRAWN BY Drawn by KEYSTONE (AI) for Shane Brazelton	SHEET P2-A-101
--	-------------------------	---	---------------------------------------	---------------------------------------	-----------------	---	------------------------------