

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 1 — OVERALL FLOOR PLAN (REV L)

Rev K (approved, D-079) with the NE stair tower resized to a 29 ft drum (D-081); everything else as drawn on Rev K (P2-A-101_RevK.dxf). Rev K tower and bay shown dashed.

CHANGES FROM REV K (all ASSUMED)

- ST-2: 20 ft tower at (178, 257.7) becomes a 29 ft drum centred (182, 262.5), west edge x 167.5; the outline still wraps it. +341 SF on this level (D-080 F1, D-081).
- Stair fit: 12.67 x 24.08 ft stair (dashed), diagonal 27.2 ft inside about 27.7 ft = 0.49 ft spare (about 3 in at each end corner). The Rev K tower had room for 15.5 ft of run.
- X6 on the drum east face (196.5, 262.5), to open ground NE.
- 29 MECH / ELEC BAY slides 2 ft west to x 134-164 (900 SF): 3.5 ft to the drum; EXIT (N) at X5 keeps a 12 ft lane between the annex and the bay (passage 1.85 ft from the annex, 2.15 ft from the bay).

ROOMS CHANGED (SF net of stairs, inside the envelope)

TAG	ROOM	REV K	REV L	CHANGE
15	MECH (N)	564	571	+7

Rev K column net of the 20 ft tower (P2-G-002 Rev E F3: the Rev K sheet did not deduct it from MECH (N)). The old Rev F-J ST-2 strip inside the box (x 185.9-210, y 246-252, about 71 SF) stays unassigned, as on Rev K.

AREA CHECK (no SF cap, D-056; L1, L2, total vs last rev, D-057)

	REV K / G	REV L / H	CHANGE
L1 footprint (envelope + annex + bay + bump-out)	57,520	57,861	+341
L2 area (envelope - open-to-below)	28,692	29,033	+341
TOTAL GSF	86,212	86,894	+682

L1 = envelope polygon 53,181 SF + annex 2,100 + bay 900 + bump-out 1,680. L2 = envelope - open-to-below 24,148 SF (Rev G method, D-079). Rev K / G baseline recomputed from the same files = D-079. Program lines: P2-G-003 Rev L.


ROOM SCHEDULE — LEVEL 1 (SF net of stairs, Rev L)

1	BOYS LOCKER	3,507	12	EVENT LOCKER 2	900
2	GIRLS LOCKER	3,507	13	EVENT LOCKER 3	900
3	MECH / ELEC (NW)	931	14	EVENT LOCKER 4	900
4	MEN	700	15	MECH (N)	571
5	WOMEN	1,150	16	MECH (E)	1,720
6	FIRST AID	120	22	MECH (NE)	505
7	VESTIBULE	520	23	FLEX / STORAGE	972
8	CONCESSION	275	24	CHAIR / TABLE / STAGE STORAGE	2,100
9	EQUIP. STORAGE	700	25	RESTROOM POP-OUT (25-27)	1,680
10	EQUIP. ROOM	300	29	MECH / ELEC BAY	900
11	EVENT LOCKER 1	900			

OPEN (not decided here)

- Drum wall: 0.49 ft spare assumes about 8 in walls; a thicker wall or a stair larger than 12.67 x 24.08 ft does not fit (architect).
- East side as approved on Rev K = plan Rev I (bump-out y 161-217, X7 on its face, no X11), not plan Rev J (D-072). Rebase in a later rev? (P2-G-003 Rev L).
- Structure of the curved shell and the 29 ft drum; tier depth 1'-6" or less (D-061). Exits: see P2-G-003 Rev L findings.
- SRM / Summertown Metals roles are not agreed; names are descriptive, no marks used (D-042).

Sources: ARENA P2-A-101_RevK.dxf; params/phase2_plan_rev_i.yaml + phase2_plan_rev_k.yaml; phase2_plan_rev_l.yaml; D-072, D-077..D-081 (DECISIONS_ARENA).

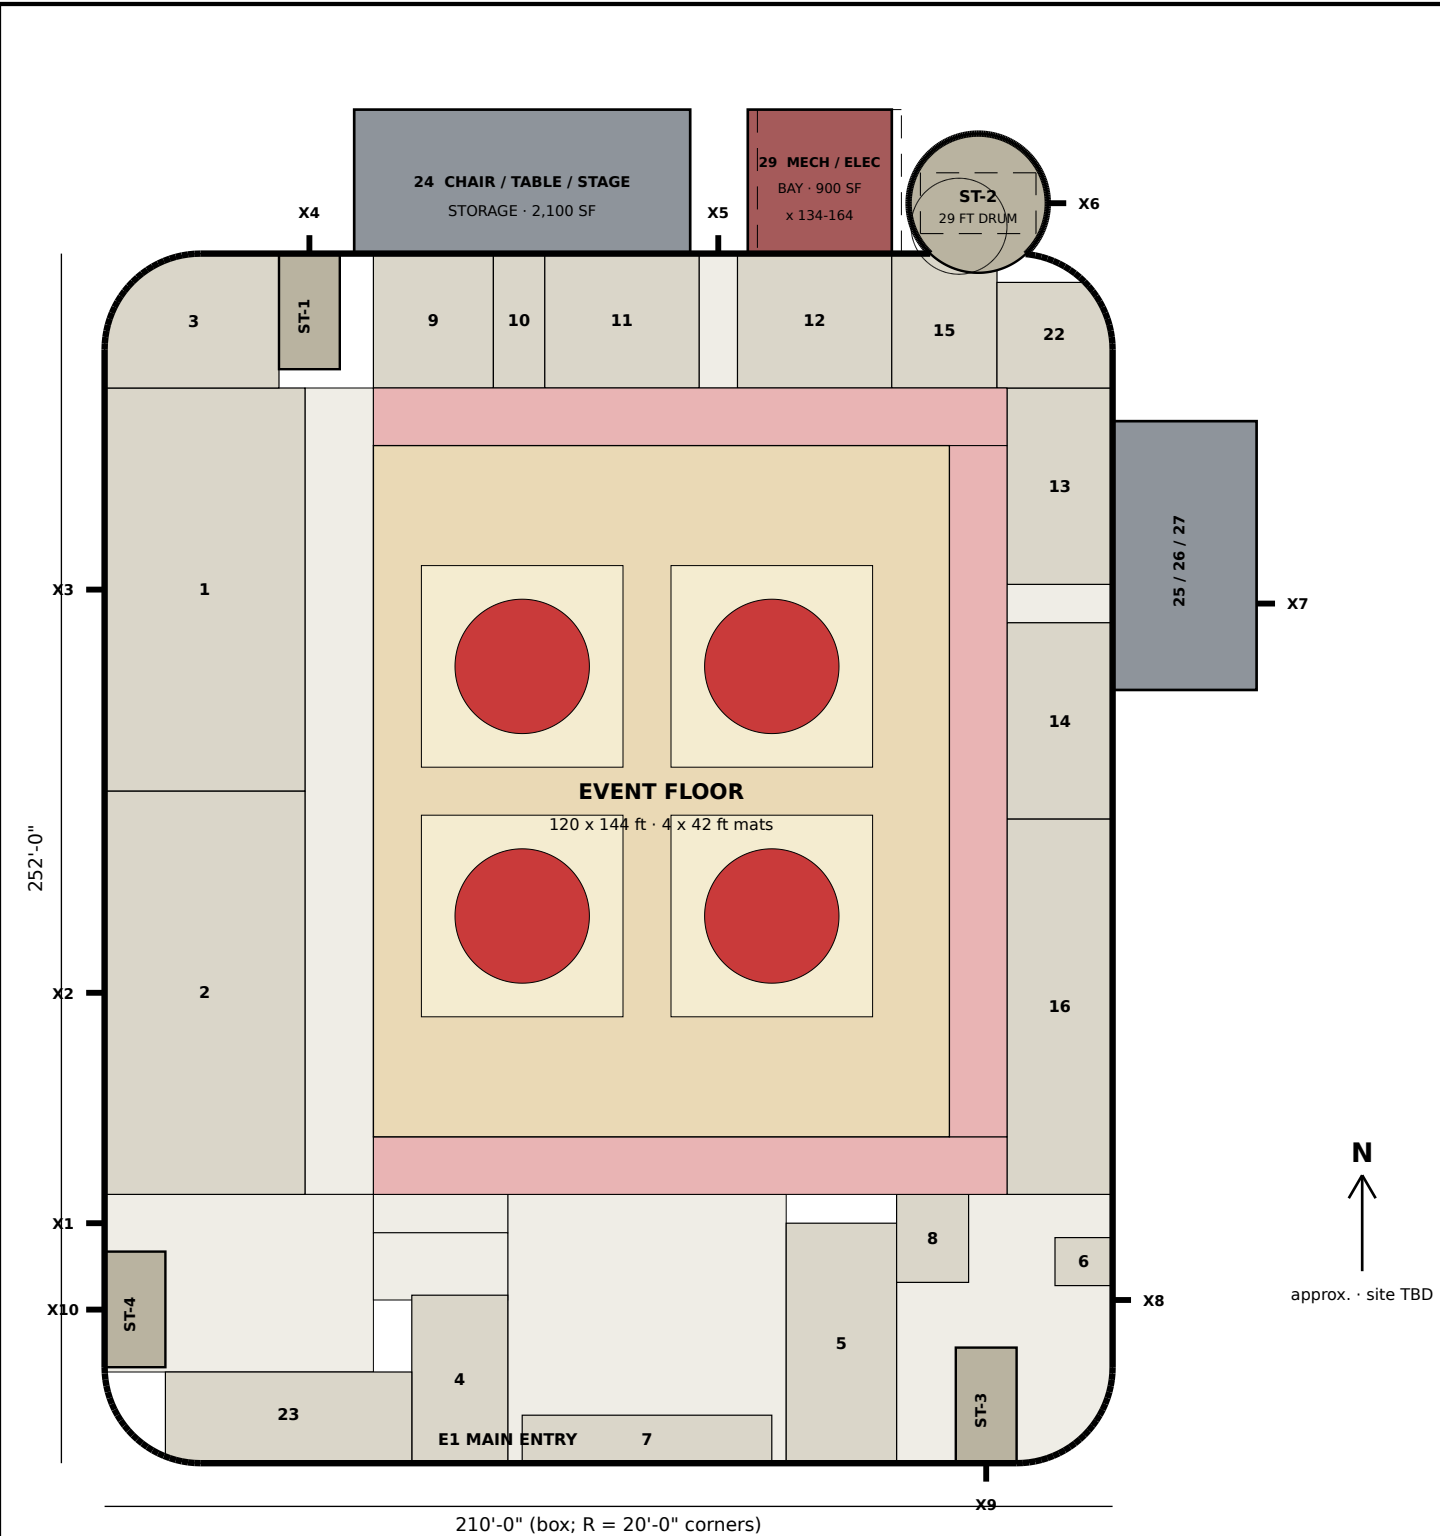

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE PHASE 2	SHEET TITLE OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	SCALE 1" = 40'-0"	DATE October 2026	REV L	DRAWN BY Drawn by KEYSTONE (AI) for Shane Brazelton	SHEET P2-A-101
--	-------------------------	---	---------------------------------------	---------------------------------------	-----------------	---	------------------------------