

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 1 — OVERALL FLOOR PLAN (REV N)

Rev M (30 ft drum D-082, plan Rev J east side D-084) with the old NE stair strip made mechanical (D-086). Nothing else moves; Level 2 (P2-A-102 Rev I) is unchanged.

CHANGES FROM REV M (all ASSUMED unless cited)

- 30 MECH (remote): the old ST-2 strip inside the box, x 185.9-204.3, y 246-251.8 (to the drum and the R 20 corner), 67 SF. It does not touch the MECH / ELEC BAY 29 (22.3 ft away), so it is marked remote (D-086). It shares 18.4 ft of wall with MECH (NE) 22 and 2.0 ft with MECH (N) 15. No door drawn; access TBD.
- Mechanical: 4,234 -> 4,302 SF = 4.87 % -> 4.95 % of 86,964 GSF vs 5 % (D-072); 47 SF short. Set Rev D: 4.1 %.
- GSF unchanged: the strip was already inside the envelope.

MECHANICAL ROOMS (SF net of stairs; D-072 method)

TAG	ROOM	REV M	REV N	CHANGE
3	MECH / ELEC (NW)	931	931	+0
15	MECH (N)	564	564	+0
16	MECH (E)	675	675	+0
22	MECH (NE)	505	505	+0
28	MECH (E2)	660	660	+0
29	MECH / ELEC BAY	900	900	+0
30	MECH (remote)	0	67	+67
TOTAL MECH (% of GSF)		4,234 (4.87 %)	4,302 (4.95 %)	+67

AREA CHECK (no SF cap, D-056; L1, L2, total vs last rev, D-057)

	REV M / I	REV N / I	CHANGE
L1 footprint (envelope + annex + bay + bump-out)	57,896	57,896	+0
L2 area (envelope - open-to-below)	29,068	29,068	+0
TOTAL GSF	86,964	86,964	+0

L1 = envelope polygon 53,216 SF + annex 2,100 + bay 900 + bump-out 1,680. L2 = envelope - open-to-below 24,148 SF (Rev G method, D-079). Rev M / I = P2-G-003 Rev M. Vs Set Rev D and program lines: P2-G-003 Rev N.


ROOM SCHEDULE — LEVEL 1 (SF net of stairs, Rev N)

1	BOYS LOCKER	3,507	14	EVENT LOCKER 4	900
2	GIRLS LOCKER	3,507	15	MECH (N)	564
3	MECH / ELEC (NW)	931	16	MECH (E)	675
4	MEN	700	22	MECH (NE)	505
5	WOMEN	1,150	23	FLEX / STORAGE	972
6	FIRST AID	120	24	CHAIR / TABLE / STAGE STORAGE	2,100
7	VESTIBULE	520	25	MEN (2)	364
8	CONCESSION	275	26	WOMEN (2)	1,020
9	EQUIP. STORAGE	700	27	DF / JAN.	56
10	EQUIP. ROOM	300	28	MECH (E2)	660
11	EVENT LOCKER 1	900	29	MECH / ELEC BAY	900
12	EVENT LOCKER 2	900	30	MECH (remote)	67
13	EVENT LOCKER 3	900			

OPEN (not decided here)

- East exits (Rev D method): X7 path 133 ft, women (2) common path 61 ft, men (2) 30 ft (75 ft max), corridor dead end 5.2 ft. Details: P2-G-003 Rev N.
- Structure of the curved shell and the 30 ft drum; tier depth 1'-6" or less (D-061). X7 / X11 discharge TBD (D-006).
- Mechanical 4.95 % vs 5 % (MEP OPEN, D-072); access to 30 MECH (remote) TBD.

Sources: params/phase2_plan_rev_j.yaml (= ARENA Set Rev D A-101 J); phase2_plan_rev_k.yaml; phase2_plan_rev_m.yaml; phase2_plan_rev_n.yaml; D-072, D-077..D-086.

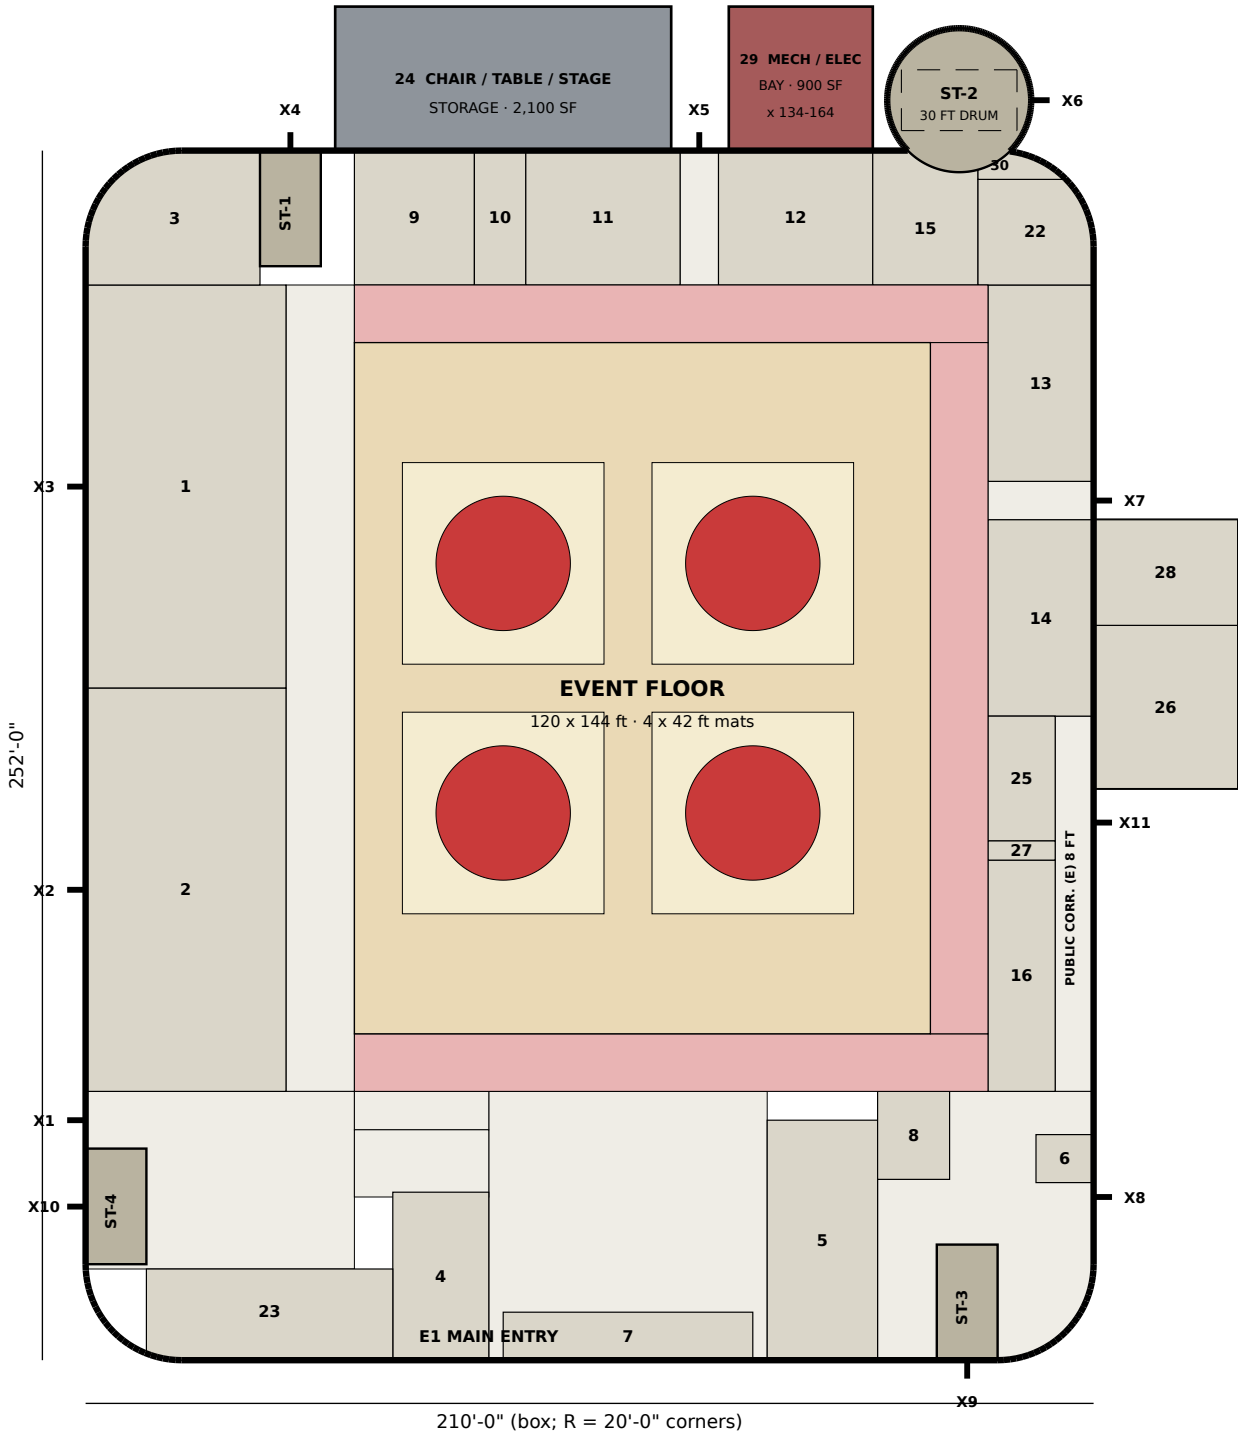

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE PHASE 2	SHEET TITLE OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	SCALE 1" = 40'-0"	DATE October 2026	REV N	DRAWN BY Drawn by KEYSTONE (AI) for Shane Brazelton	SHEET P2-A-101
--	-------------------------	---	---------------------------------------	---------------------------------------	-----------------	---	------------------------------