



V1 AERIAL FROM SOUTHWEST

axonometric · not to scale

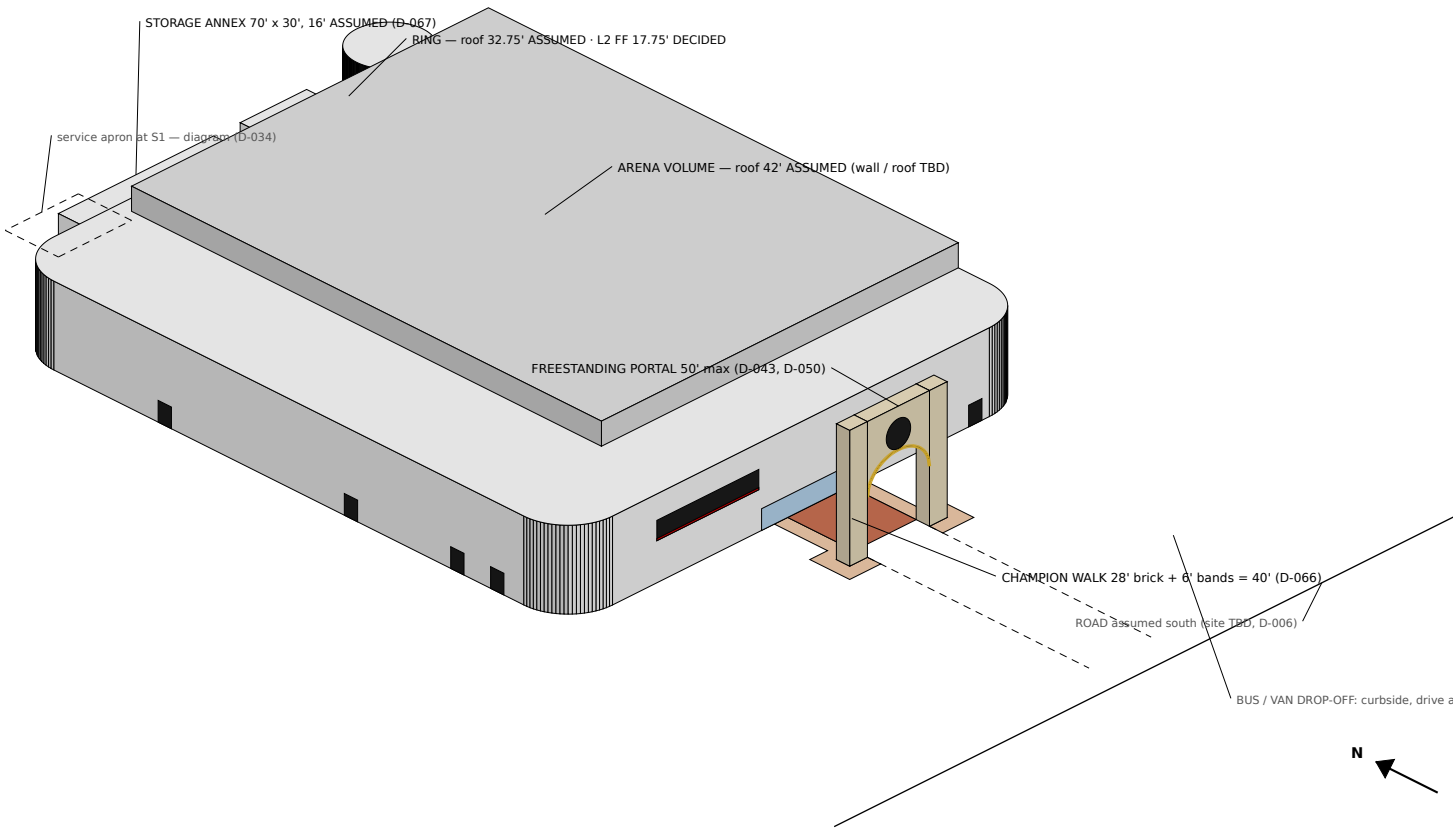


V2 CUTAWAY AT L2 FF 17'-9" FROM SOUTHWEST — ROOFS REMOVED

axonometric · not to scale · roofs removed, L1 ring cut solid at L2 FF

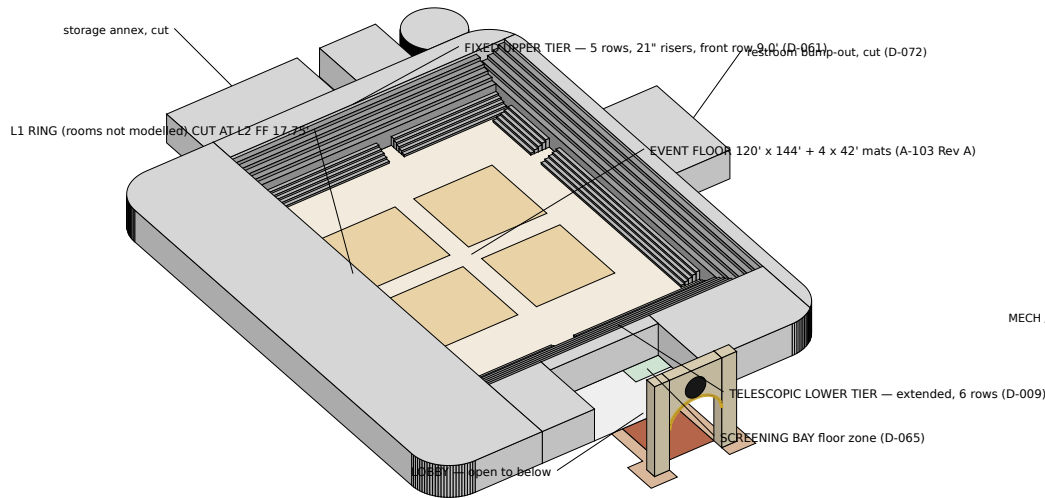


V3 AERIAL FROM SOUTHEAST

axonometric · not to scale

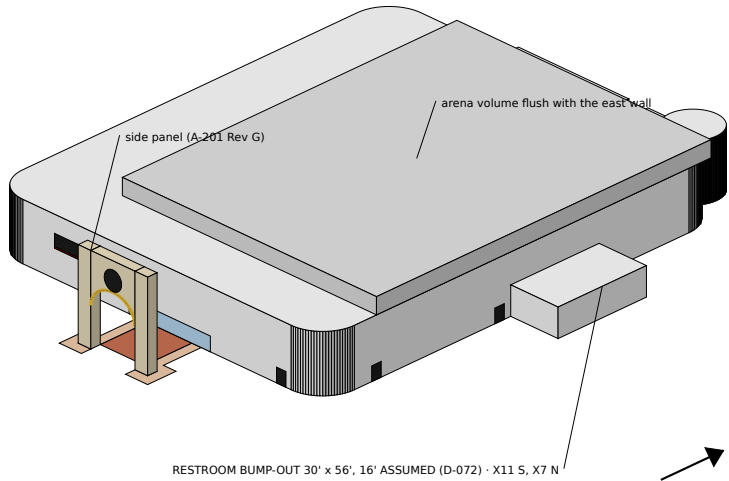


V4 AERIAL FROM NORTHWEST (SERVICE SIDE, S1)

axonometric · not to scale

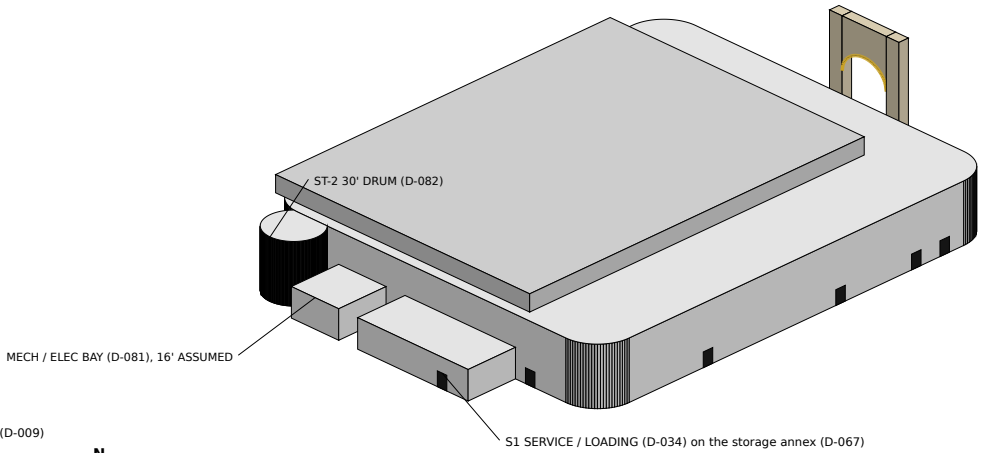

V5 PORTAL + CHAMPION WALK FROM SOUTH-SOUTHWEST

axonometric · not to scale

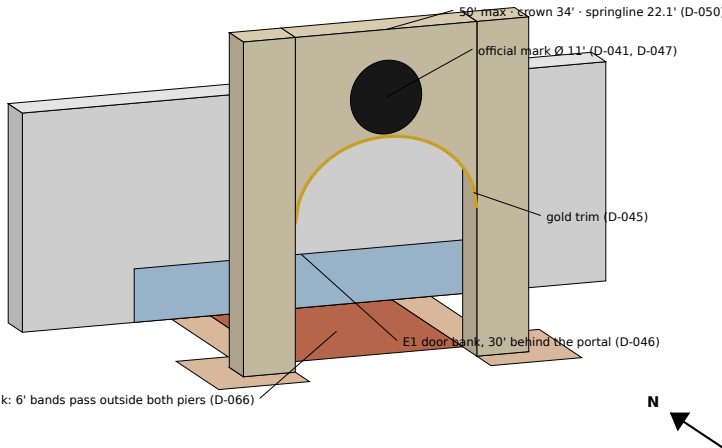

MASSING ONLY. Volumes from the current schematic params; materials, openings, parapets, roof equipment and structure are not designed. Every height not marked DECIDED is ASSUMED (P2-A-201 Rev G). Not a rendering of a final design.

HEIGHTS MODELLED

L2 FF 17.75' DECIDED (D-061) · ring roof 32.75' ASSUMED · arena roof 42' ASSUMED (P2-A-201 Rev G) · portal 50' max, crown 34', springline 22.1' (D-050) · tiers per P2-A-301 Rev D / A-302 Rev C. Door symbols 6' x 8' ASSUMED.

DECISIONS MODELLED — SHANE 2026-10-04 + 2026-10-09 (D-072 .. D-087)

- D-054 DECIDED: chairs-only floor is the design case — no stage / chairs modelled (layout TBD).
- D-065 DECIDED: screening bay in the lobby's east side, shown as a floor zone in the cutaway.
- D-066 DECIDED: 40 ft walk = 28 ft brick + 6 ft bands, around both portal piers.
- D-067 DECIDED: storage annex 70 x 30 ft on the north wall, one storey (16 ft ASSUMED), S1 on its north face.
- D-069 DECIDED: restroom core 2 in a one-storey bump-out 30 x 56 ft on the east wall (16 ft ASSUMED).
- D-072 DECIDED: bump-out slid 42 ft south, entirely south of EXIT (E); public corridor (E) inside (not modelled); X7 back on the wall, X11 new.
- D-082 DECIDED: R 20 ft corners (D-077), 30 ft NE drum at ring-roof height, mech / elec bay (D-081).
- D-087 DECIDED: bus loop cut; team bus + van drop-off curbside along the parking drive aisle (ASSUMED, TBD, D-006); service at S1.

NOTES

- NOT MODELLED: parapets (TBD), rooftop units, structure, windows / cladding, grading, landscaping, lighting, parking (site TBD, D-006), signage content (signage zone TBD), interior rooms.
- Colours: limestone / crimson / gold / brick / brand red + black from P2-A-201 Rev G finishes (hex ASSUMED swatches); greys = material TBD. Arch drawn as a 56-segment polyline; the crimson underside faces down and does not show in views from above.
- Model file: phase2/out/3d/P2-A-901_RevF_massing.obj + .mtl (feet, Y-up export; exterior, cutaway and portal sets).

Sources: params/phase2_massing.yaml; phase2_massing_rev_d.yaml; phase2_plan_rev_j.yaml; phase2_elev_rev_g.yaml; phase2_elev.yaml; phase2_site.yaml + phase2_site_rev_h.yaml (rev_h); p2_plan_rev_n_geom.py (A-101 Rev N); phase2_sect.yaml; D-034, D-043, D-045, D-046, D-050, D-054, D-061, D-065 to D-067, D-069, D-072, D-077, D-081, D-082, D-084, D-087; Shane 2026-10-04 evening + 2026-10-09 1:05 PM CT. P2-A-201 Rev I shows the annex + bump-out.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena · Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

3D MASSING MODEL
VIEWS

SCALE

NTS

DATE

October
2026

REV

F

DRAWN BY

Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-A-901