

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 1 — OVERALL FLOOR PLAN (REV K)

Rev J layout (frozen, D-073) inside the radiused SRM-language envelope approved at R = 20 ft (D-077). Rooms, tiers, mats, exits and areas are Rev J unless listed under CHANGES. Rev J dashed outlines show where the corner stairs were.

CHANGES FROM REV J (all ASSUMED)

- Envelope: 210 x 252 ft box with R = 20 ft corners (removes about 344 SF per level at the four corners).
- ST-3 (SE) slides west along the south wall to x 177.3-190; same 12.667 x 24.083 ft, exit X9 to x 183.7. Clears L2 WOMEN (2).
- ST-4 (SW) slides north along the west wall into the FLEX / TEAM ASSEMBLY zone (no program); exit X10 on the west wall; exit X1 moves to y 50 beside it.
- ST-2 (NE) is a 20 ft diameter cylindrical tower INSIDE the building envelope: the outline wraps it, it lands on the L2 loop north leg, exit X6 on its east face. Replaces the 24.08 x 6.67 ft NE projection.
- NEW 29 MECH / ELEC BAY 30 x 30 ft (900 SF), one storey, metal-building pop-out 14 ft east of the storage annex so the EXIT (N) passage at X5 stays clear (D-074).
- MECH (NW) and MECH (NE) lose corner area to the radius (below); the bay makes it up.

ROOMS CHANGED (SF drawn)

TAG	ROOM	REV J	REV K	CHANGE
3	MECH / ELEC (NW)	1,017	931	-86
22	MECH (NE)	530	505	-25
23	FLEX / STORAGE	975	972	-3
29	MECH / ELEC BAY (new)	0	900	+900

AREA CHECK (no SF cap, D-056; L1, L2, total vs Rev J, D-057)

	REV J	REV K	CHANGE
L1 footprint (envelope + annex + bay + bump-out)	56,861	57,520	+659
L2 area	28,933	28,736	-197
TOTAL GSF	85,794	86,256	+462

L1 = envelope polygon (box with R = 20 ft corners + tower) 52,840 SF + annex 2,100 + bay 900 + bump-out 1,680. L2 = Rev J 28,933 less 197 SF where Rev J L2 rooms and the loop fall outside the radius; the tower is not added to L2 (ASSUMED, as the Rev J projection). Recompute on P2-G-003 Rev L.


ROOM SCHEDULE — LEVEL 1 (SF inside the Rev K envelope)

1	BOYS LOCKER	3,507	12	EVENT LOCKER 2	900
2	GIRLS LOCKER	3,507	13	EVENT LOCKER 3	900
3	MECH / ELEC (NW)	931	14	EVENT LOCKER 4	900
4	MEN	700	15	MECH (N)	614
5	WOMEN	1,150	16	MECH (E)	1,720
6	FIRST AID	120	22	MECH (NE)	505
7	VESTIBULE	520	23	FLEX / STORAGE	972
8	CONCESSION	275	24	CHAIR / TABLE / STAGE STORAGE	2,100
9	EQUIP. STORAGE	700	25	RESTROOM POP-OUT (25-27)	1,680
10	EQUIP. ROOM	300	29	MECH / ELEC BAY (new)	900
11	EVENT LOCKER 1	900			

OPEN (not decided here)

- Structure of the curved shell and the 120 ft roof span; tier depth still needs <= 1'-6" (D-061).
- Egress / exit capacity with X6, X9, X10 moved: recheck on P2-G-002 (Rev E).
- A-102 Level 2 needs a matching Rev (loop corners, ST-2 landing).
- SRM / Summertown Metals roles are not agreed; names are descriptive, no marks used (D-042).

Sources: params/phase2_plan_rev_i.yaml (Rev J); params/phase2_plan_rev_k.yaml; D-070..D-077 (DECISIONS_ARENA).

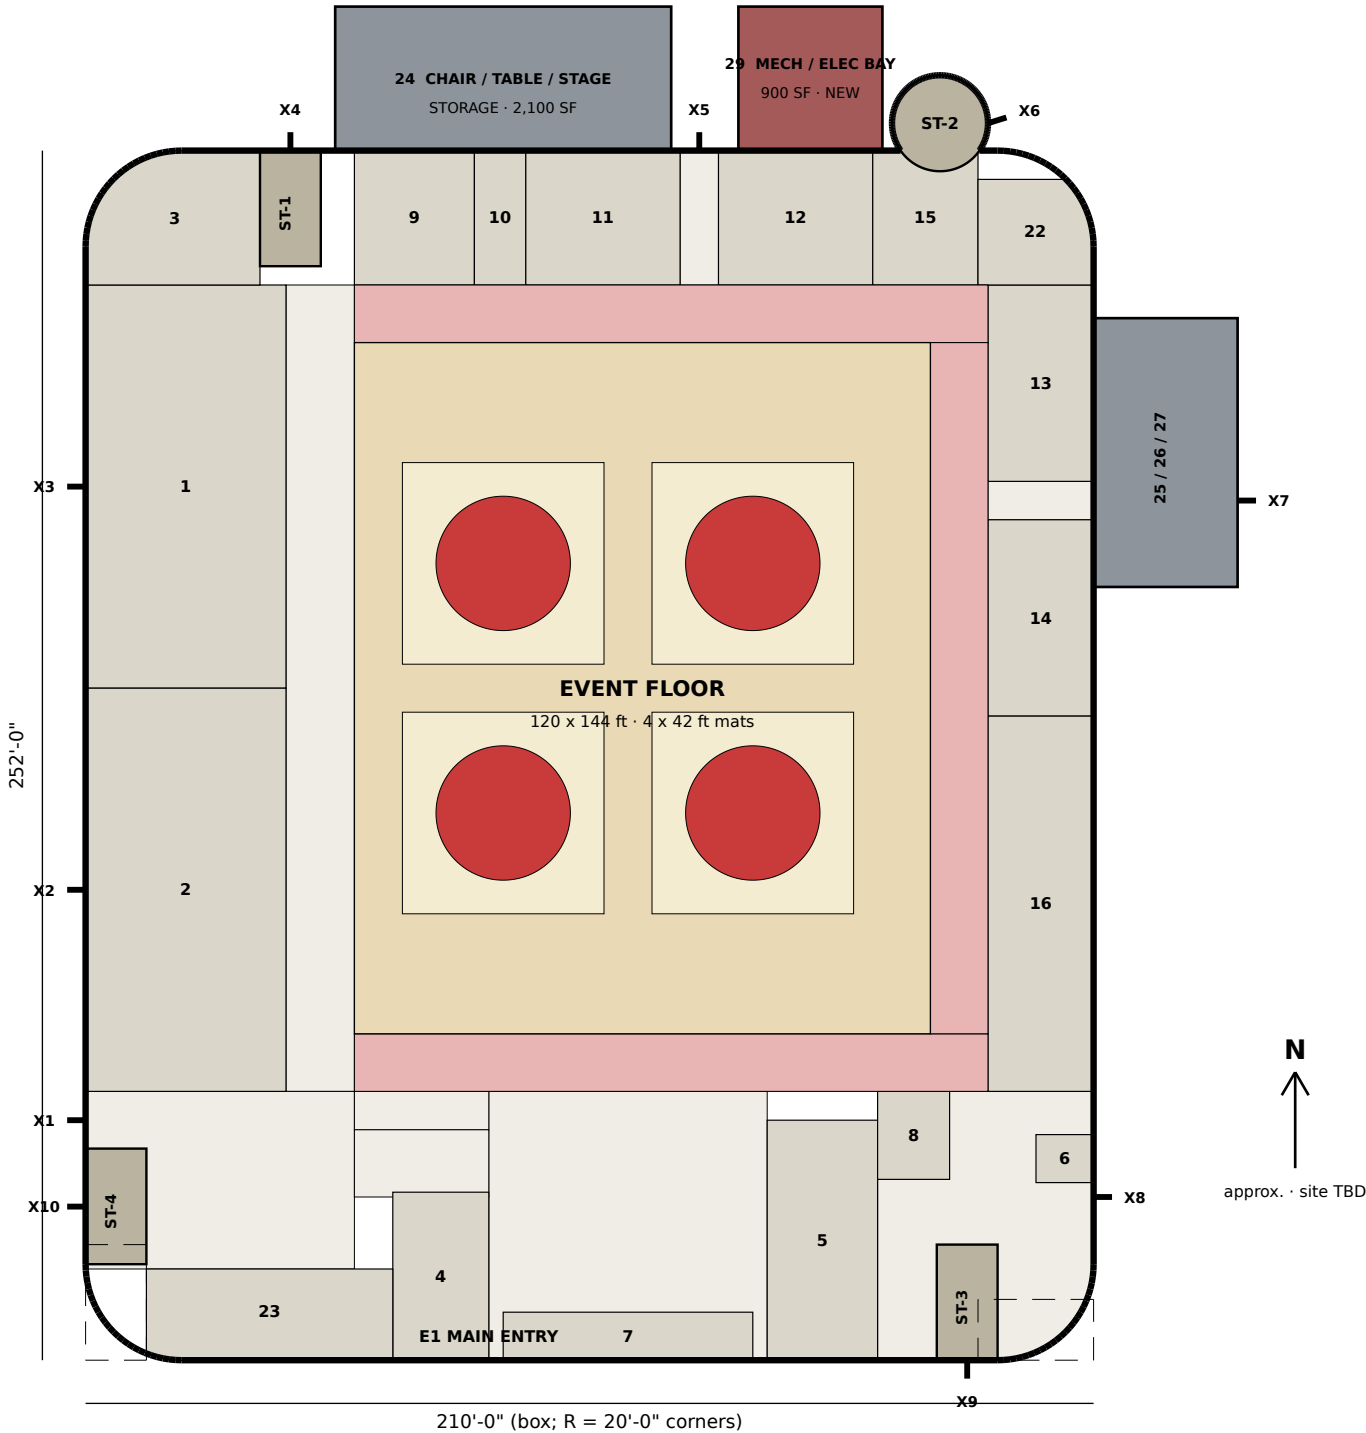

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE PHASE 2	SHEET TITLE OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	SCALE 1" = 40'-0"	DATE October 2026	REV K	DRAWN BY Drawn by Claude (AI) for Shane Brazelton	SHEET P2-A-101
--	-------------------------	---	---------------------------------------	---------------------------------------	-----------------	---	------------------------------