

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 2 — OVERALL FLOOR PLAN (REV G)

Rev F Level 2 (frozen) inside the Rev K envelope (R = 20 ft, D-077; P2-A-101 Rev K approved, D-079). Rooms, tiers, guards and seat counts are Rev F unless listed under CHANGES. Rev F dashed outline shows the old NE stair projection.

CHANGES FROM REV F (all ASSUMED)

- Envelope: box with R = 20 ft corners; S&C (17) and the L2 corridor lose the NW / SW corner area; upper concourse (E) loses the SE corner.
- ST-2 is the 20 ft cylindrical tower (centre 178, 257.7). It replaces the 24.08 x 12.67 ft NE stair, so the north stretch strip now ends at x 168 and the tower is entered from the strip by a door on its SW face (no L2 door on the loop).
- ST-3 and ST-4 as Rev K (slid along their walls); same L2 position as L1, rooms trimmed around them.
- NE loop corner: the 20 ft arc cuts the loop's outer corner; with a square inner edge the clear width drops to 5.2 ft (7 ft = 2 lanes x 42 in needed). Inner edge rounded to R 13 ft keeps 7 ft; the tier corner loses 4.6 SF (under 1 seat).

ROOM SCHEDULE — LEVEL 2 (SF net of stairs, inside the Rev G envelope)

TAG	ROOM	REV F	REV G	CHANGE
—	Upper tier, fixed (1,100 seats)	6,930	6,930	0
—	Running / training loop	5,026	5,006	-20
17	Strength & Conditioning	5,124	5,038	-86
18	Cross-Training Mat	3,500	3,500	0
19	Men	550	550	0
20	Women	900	900	0
21	Admin	470	470	0
—	L2 Corridor		2,192	
—	Upper Concourse (E)		994	
—	Stretch / Warm-up (N)		714	
—	ST-2 landing / NE corner (not programmed)		141	

AREA CHECK (no SF cap, D-056; L1, L2, total vs Rev J, D-057)


	REV J	REV K/G	CHANGE
L1 footprint (P2-A-101 Rev K)	56,861	57,520	+659
L2 area (envelope - open-to-below)	28,933	28,692	-241
TOTAL GSF	85,794	86,212	+418

L2 = envelope 52,840 SF - open-to-below 24,148 SF (arena 132 x 168 + lobby 58 x 34), the Rev F method. This corrects the P2-A-101 Rev K sheet (L2 28,736, TOTAL 86,256): that figure kept the Rev J NE projection and did not count the tower floor; use 28,692 / 86,212. Carry to P2-G-003 Rev L.

OPEN (not decided here)

- Exit capacity and travel distance with ST-2 as the only NE stair and X1, X6, X9, X10 moved: P2-G-002 recheck (Rev F).
- Tower floor-to-floor and the strip landing: 6 ft landing at a 76 in stair door needs architect confirmation (IBC 1010 not checked).
- Structure of the curved shell and tier depth of 1'-6" or less (D-061); seat counts re-verified after the corner cut.
- SRM / Summertown Metals roles are not agreed; names are descriptive, no marks used (D-042).

Sources: params/phase2_plan_rev_i.yaml (L2 as Rev F); phase2_plan_rev_k.yaml; phase2_plan_rev_g_l2.yaml; D-035, D-061, D-077..D-079.

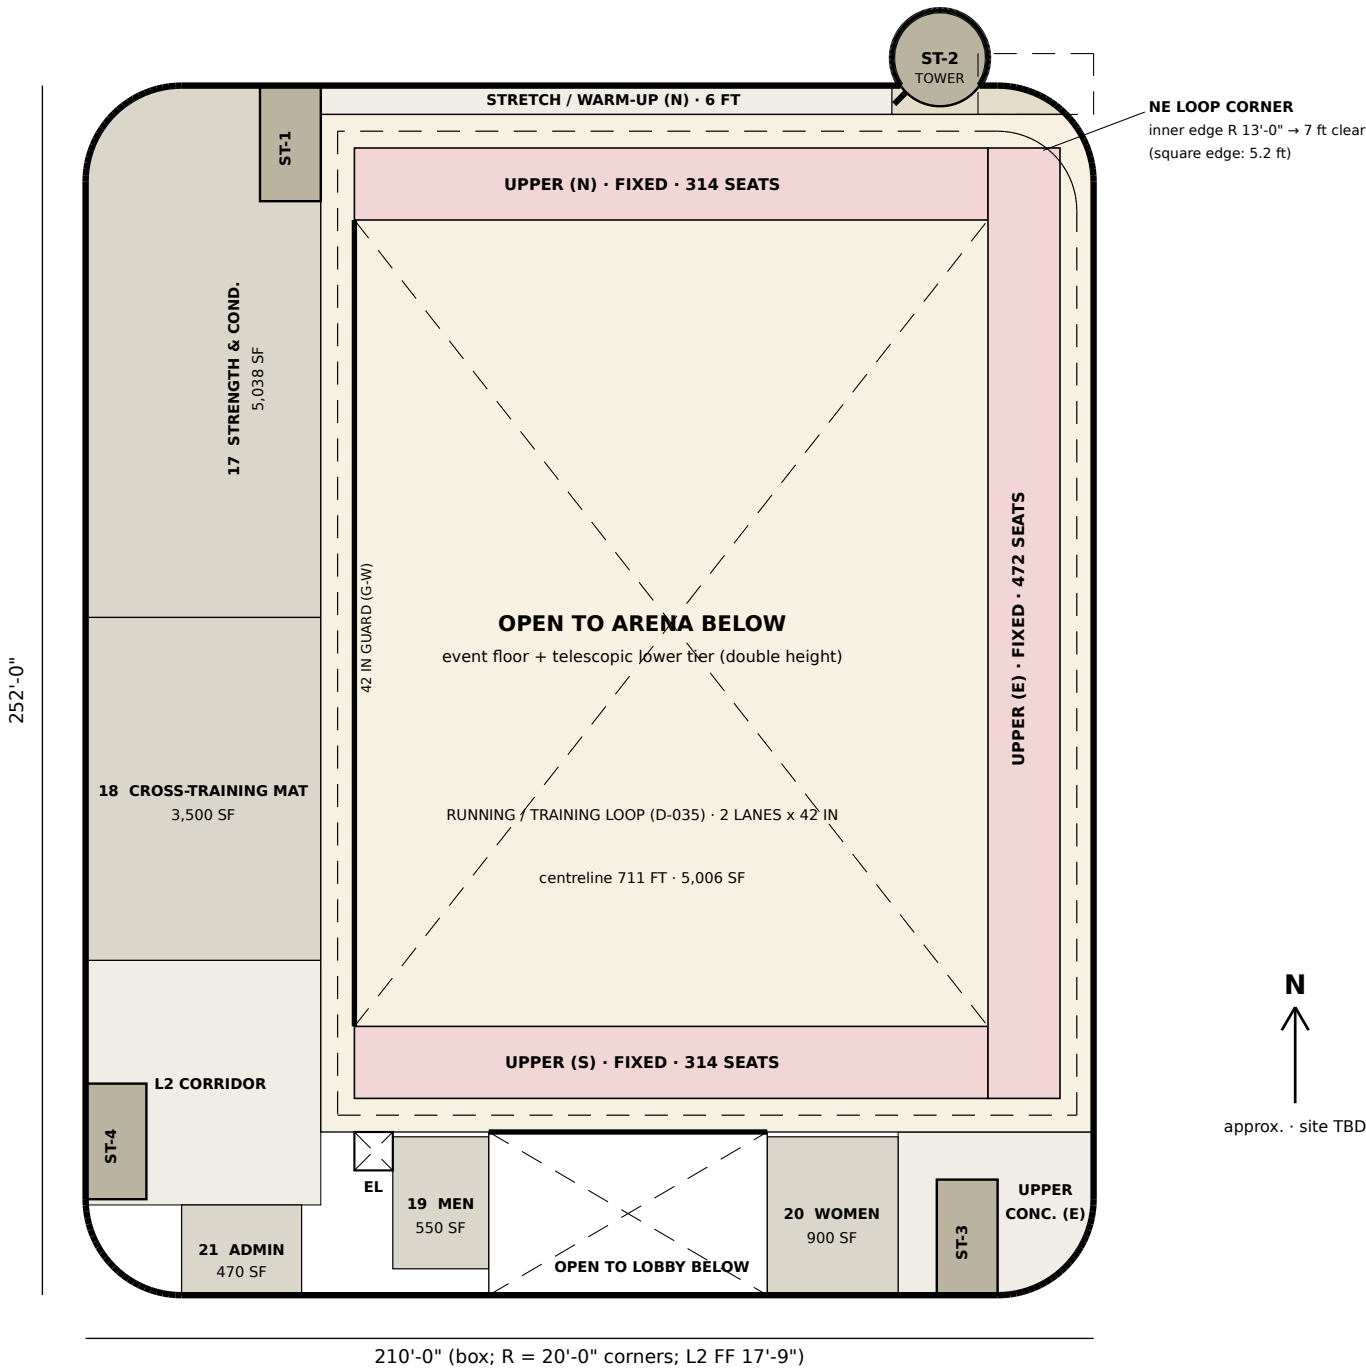

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE PHASE 2	SHEET TITLE OVERALL FLOOR PLAN LEVEL 2 · BLOCK PLAN	SCALE 1" = 40'-0"	DATE October 2026	REV G	DRAWN BY Drawn by Claude (AI) for Shane Brazelton	SHEET P2-A-102
--	-------------------------	---	---------------------------------------	---------------------------------------	-----------------	---	------------------------------