


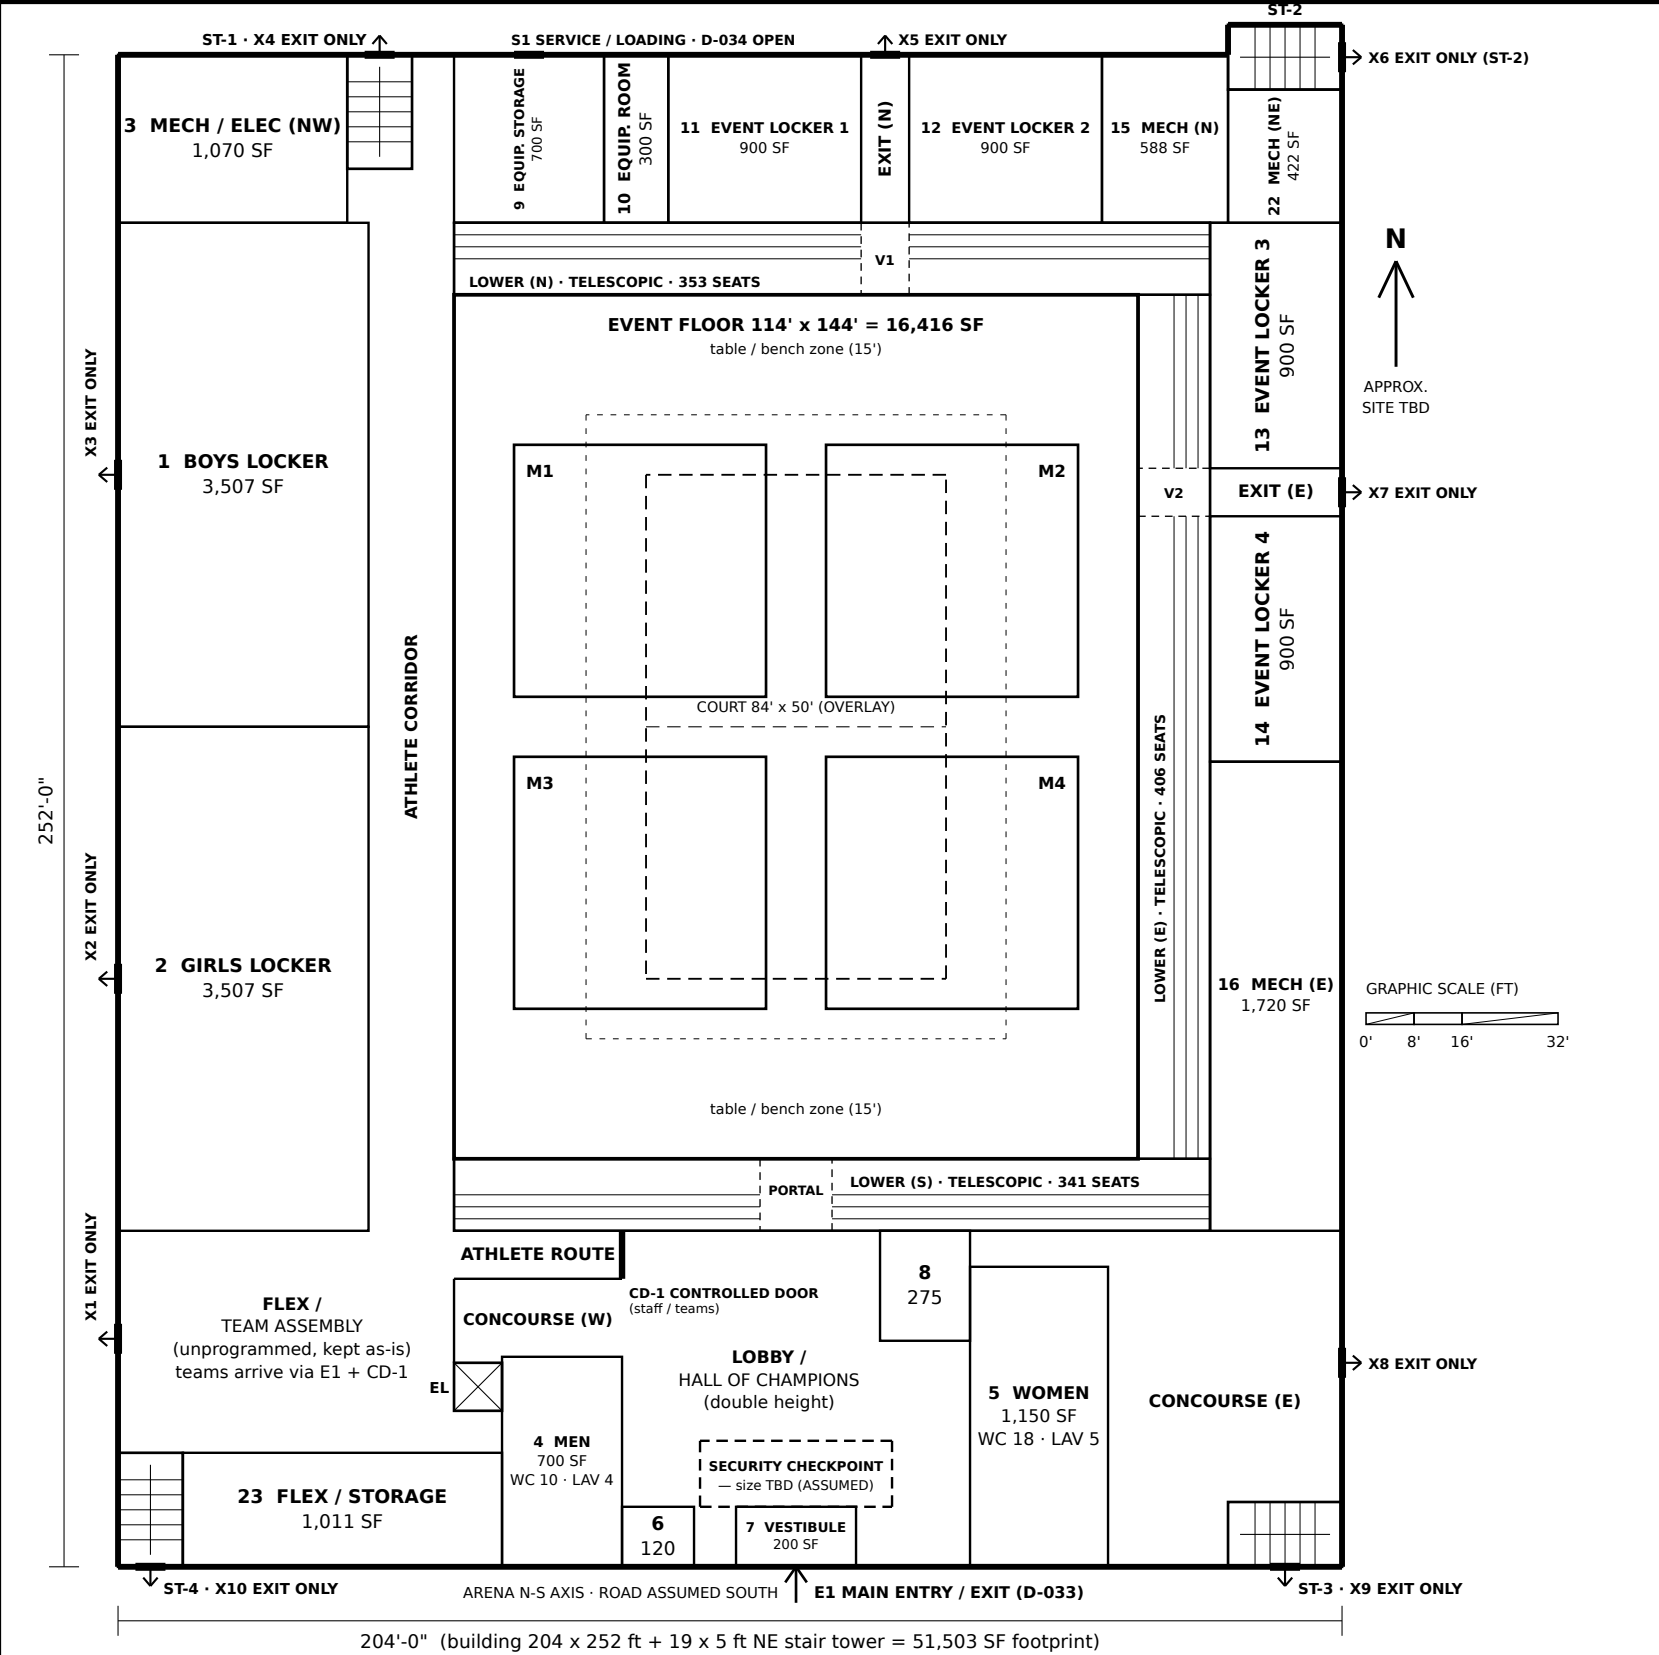

SCHEMATIC — BLOCK PLAN

LEVEL 1 — OVERALL FLOOR PLAN (REV D)

scale 1/32" = 1'-0" on 17 x 11 in · north approximate, road assumed south, site TBD

LEGEND

- Lower tier, TELESCOPIC (extended, 6 rows x 24 in; 3.38 SF/seat) — D-009
- 42' wrestling mat (4, 2 x 2)
- 84' x 50' court + 10' runout (overlay)
- Portal / vomitory through the telescopic tier (V1, V2)
- X# = EXIT ONLY — alarmed, no exterior entry hardware (symbol; width not drawn)
- S1 = SERVICE / LOADING door (staff-controlled, not a people entrance; D-034 OPEN)
- Security checkpoint zone (size TBD) · CD-1 controlled door (staff / teams)
- Room block (tag number + drawn SF)
- Stair (4) / elevator (X), same position on both levels

ROOM SCHEDULE — LEVEL 1 (drawn vs locked program, P2-G-003 Rev F)

TAG	ROOM	DRAWN SF	PROGRAM	NOTE
—	Event floor (D-030 locked)	16,416	16,400	114' x 144'
—	Lower tier, telescopic (1,100 seats)	4,752	3,719	6 rows; N 353 / S 341 / E 406
1	Boys Locker	3,507	3,500	
2	Girls Locker	3,507	3,503	drawn equal to boys (D-013)
3	Mech / Elec (NW)	1,070	1,109	
4	Men	700	700	14 fixtures (WC 10, LAV 4; urinals ≤ 6 of the WCs)
5	Women	1,150	1,150	23 fixtures (WC 18, LAV 5)
6	First Aid	120	120	
7	Vestibule	200	200	200 of the foyer parts; lobby 400 + desk 200 sit in the lobby
8	Concession	275	275	
9	Equip. Storage	700	700	
10	Equip. Room	300	300	
11	Event Locker 1	900	900	
12	Event Locker 2	900	900	
13	Event Locker 3	900	900	
14	Event Locker 4	900	900	
15	Mech (N)	588	610	
16	Mech (E)	1,720	1,783	
22	Mech (NE)	422	437	NE pocket; Rev D: grows north to ST-2
23	Flex / Storage	1,011	—	FLEX, unprogrammed, kept as-is (D-039)

AREA CHECK

Building 51,503 SF (204 x 252 + NE stair tower): 3,497 under the 55,000 cap. P2-G-003 Rev F footprint 52,738 (margin 2,262), 1,235 SF more than drawn. Seats 2,200 (N 661, S 649, E 890), unchanged. Rev D at L1: ST-1 3.55 ft west, ST-2 5 ft north (tower), elevator 1 ft south, to clear the L2 loop. Mech drawn 3,800 vs 3,939. FLEX (kept as-is): team assembly ≈ 2,072, storage 1,011 SF.

ACCESS CONTROL + EGRESS (D-033 DECIDED; layout ASSUMED)

- ONE WAY IN for public, teams and staff: E1 grand entrance → security checkpoint (size TBD) → lobby. Teams then go west through CD-1 (controlled door) to team assembly, the athlete corridor and lockers.
- X1-X10 EXIT ONLY — alarmed, no exterior entry hardware. Egress side opens without a key or special knowledge (IBC 2021 1010.2; 2018 1010.1.9); panic hardware only (1010.2.9); stair discharge doors lock from outside only (1010.2.7 exc. 1). Delayed egress is not allowed in Group A (1010.2.13): alarm only, no delay.
- Count: > 1,000 occupants per story → 4 exits (T1006.3.3); L1 = E1 + X1-X10, L2 = 4 stairs (R-015). Main exit ≥ 1/2 of the occupant load, fronting a street (1030.2); other exits ≥ 1/2 (1030.3). Seats alone: E1 ≥ 1,100 x 0.15 in = 165 in clear (1005.3.2 exc. 1, sprinklers + EVACS per R-015); final load TBD (R-007).
- Checkpoint must not narrow the main exit (1003.6, 1010.5). S1 service / loading: deliveries and buses OPEN (D-034).
- Layout (ASSUMED): exit passages N + E line up with V1 / V2; event lockers open onto them. Exit separation, travel distance, sightlines NOT checked.

Sources: phase2.yaml (D-009, D-030, D-031, D-033, D-035); Shane 2026-10-04 4:30, 4:43, 4:55 AM CT; P2-G-003 Rev F; R-008, R-009, R-014, R-015; IBC 2021 Ch. 10 (UpCodes, Alabama); UFC 4-740-02N; Athletic Business (retrieved 2026-10-04). Geometry: params/phase2_plan_rev_d.yaml.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	1/32" = 1'-0"	October 2026	D	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-101