


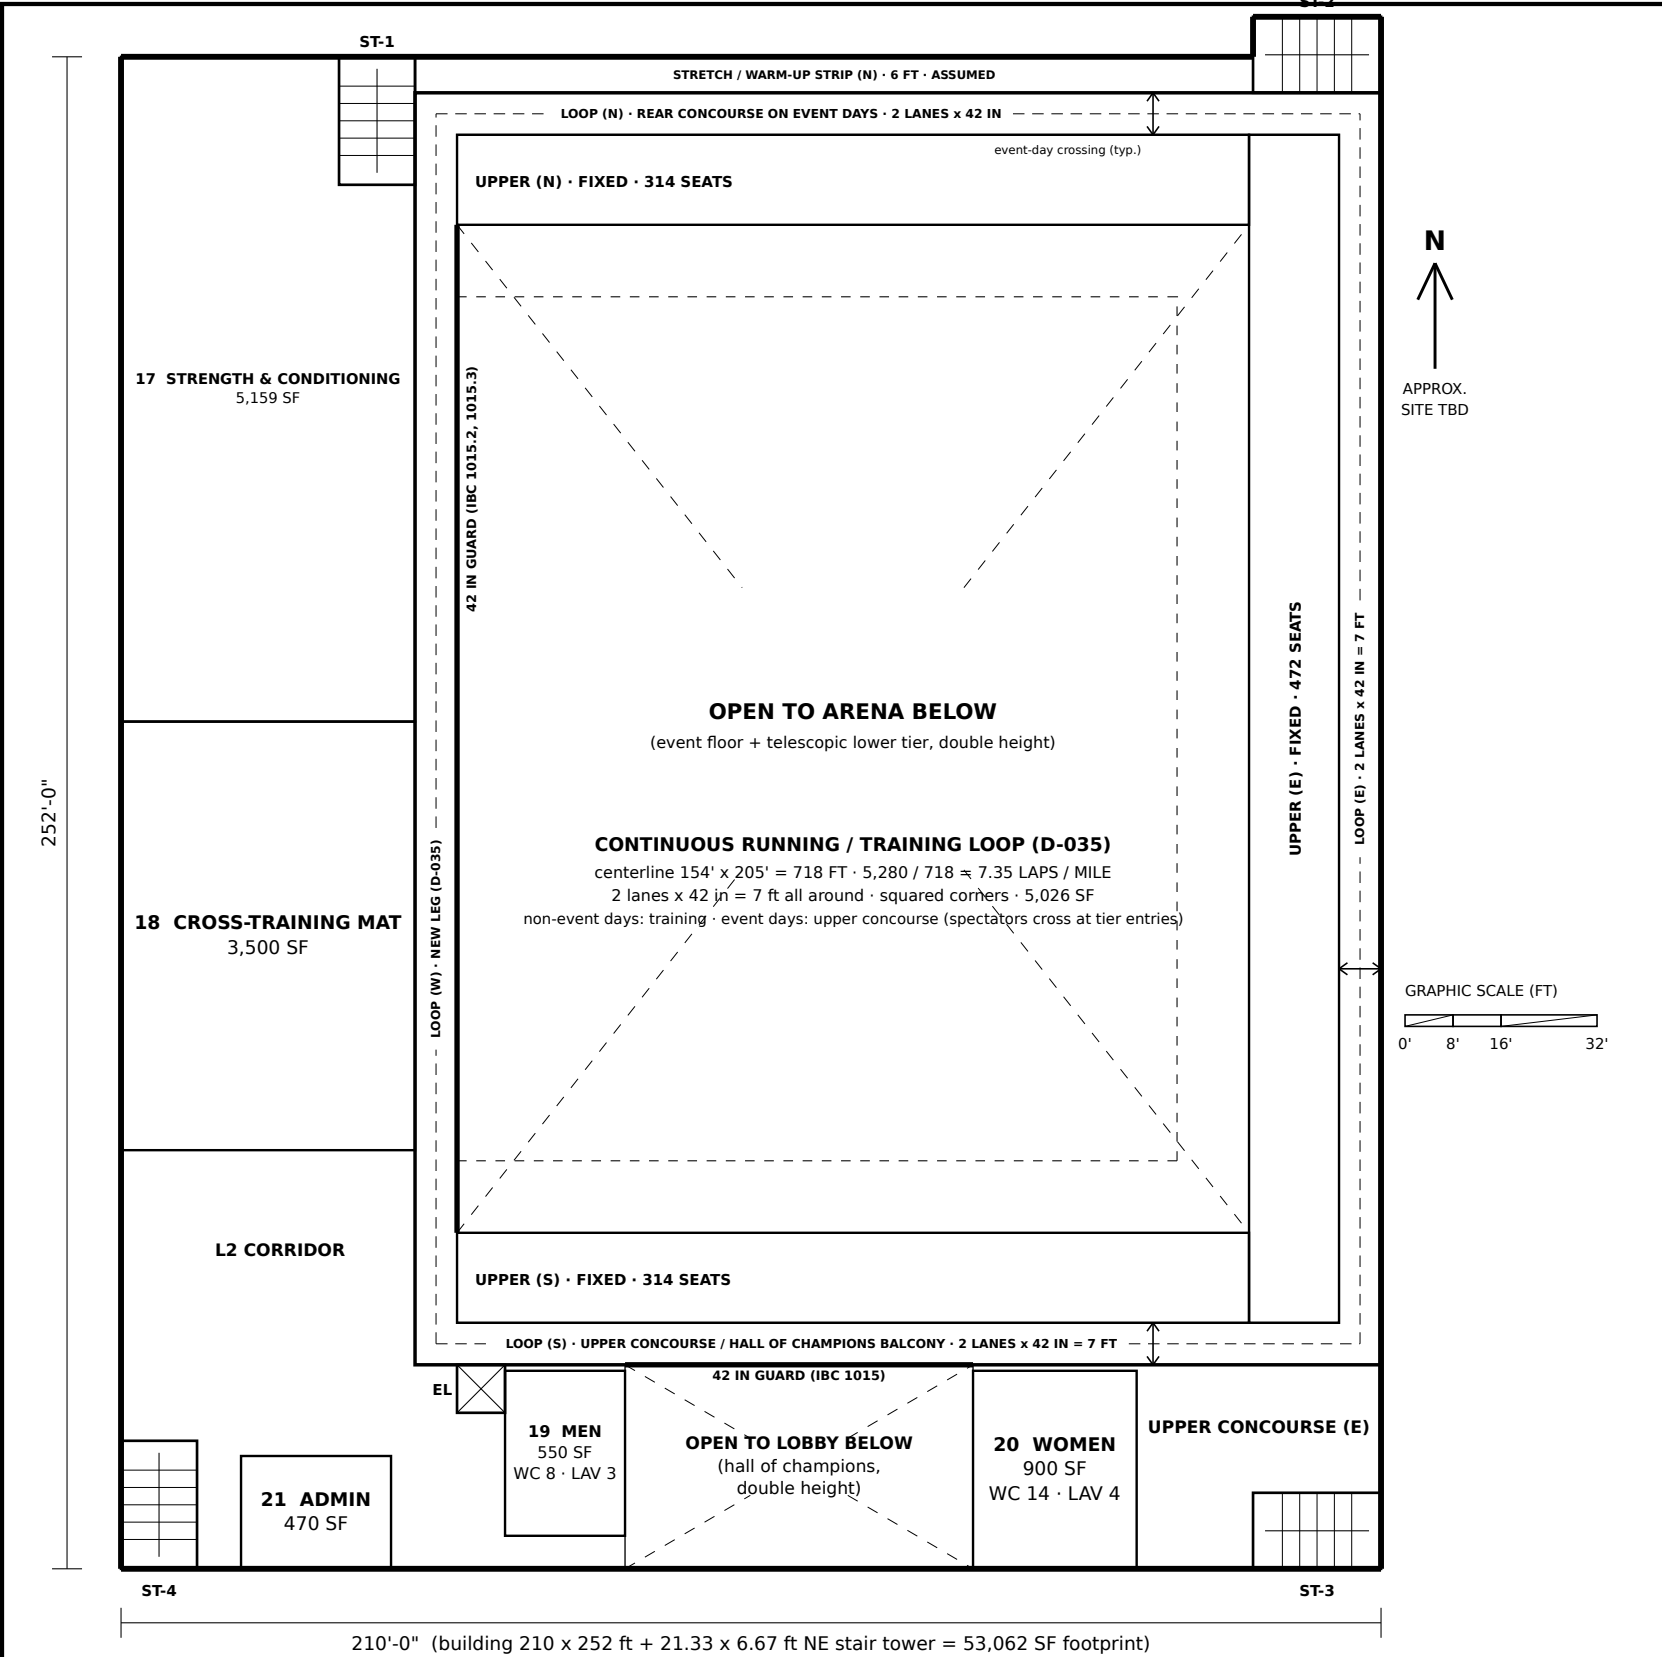

SCHEMATIC — BLOCK PLAN

LEVEL 2 — OVERALL FLOOR PLAN (REV E)

scale 1/32" = 1'-0" on 17 x 11 in · north approximate, road assumed south, site TBD

LEGEND

- Upper tier, FIXED (6.0 SF/seat) on the Level 2 deck — D-009
- Open to below (arena; lobby double height)
- Running / training loop, 2 lanes x 42 in (dashed = lane line) — D-035
- 42 in guard at an open edge (IBC 2021 1015.2, 1015.3)
- Room block (tag number + drawn SF)
- Stair (4) / elevator (X), same position on both levels

ROOM SCHEDULE — LEVEL 2 (DRAWN vs PROGRAM side by side, P2-G-003 Rev G; C-3)

TAG	ROOM	DRAWN SF	PROGRAM	NOTE
—	Upper tier, fixed (1,100 seats)	6,930	6,600	N 314 / S 314 / E 472
—	Running / training loop	5,026	5,026	2 x 42 in; 718 ft CL; 7.35 laps/mi
17	Strength & Conditioning	5,159	5,224	ST-1 (76 in) inside: –65 vs program (C-3)
18	Cross-Training Mat Area	3,500	3,500	trimmed 7 ft for the loop (D-035)
19	Men	550	550	11 fixtures (WC 8, LAV 3; urinals ≤ 5 of the WCs)
20	Women	900	900	18 fixtures (WC 14, LAV 4)
21	Admin	470	470	

AREA CHECK — D-057 (no SF cap, D-056)

	DRAWN REV E	REV D	CHANGE	PROGRAM G-003 G	DRAWN – PROG.
L1 FOOTPRINT	53,062	51,503	+1,559	54,241	–1,179
L2 AREA	28,914	28,363	+551	28,012	+902
TOTAL GSF	81,976	79,866	+2,110	82,253	–277

L2 = footprint minus open-to-below (arena 132 x 168, lobby 58 x 34). S&C 5,224 program vs 5,159 drawn: the 76 in ST-1 takes 65 SF more than Rev D (C-3).

LEVEL 2 LOOP (D-035 DECIDED; geometry ASSUMED) + EGRESS

- LOOP (D-035, Shane 4:55 AM CT): continuous around the top of Level 2 — rear walkway (N), walkway (E), upper concourse / balcony (S) and a new west leg cut from S&C + cross-training. 2 lanes x 42 in = 7 ft everywhere, squared corners; 718 ft centerline = 7.35 laps/mile.
- Lane width: UFC 4-740-02N 4.1.7 (indoor track ≥ 12 ft, 3 lanes x 42 in); Athletic Business (3 lanes of 36-42 in; max 12 laps/mile, 8-10 preferred). 2 lanes ASSUMED (3 would need 10.5 ft; the upper tier would move).
- Event days the loop is the upper concourse: spectators cross it at the upper-tier entries (marked, locations ASSUMED) and at the stairs / elevator, which open onto it. Training on non-event days; crossing users are a known track hazard (Athletic Business).
- Guards 42 in min. where the loop is open more than 30 in above the floor below (IBC 2021 1015.2, 1015.3; 4 in sphere 1015.4): west edge over the arena, south edge over the lobby. Tier backs: rail / guard per 1030.17 (architect).
- Stairs 76 in (D-052) with 76 in intermediate landings (D-051) = 12.67 x 21.33 ft, same spot both levels. ST-2 sits in a 21.33 x 6.67 ft NE stair tower (Rev D 19 x 5): 6.67 ft is what keeps it clear of the loop's north leg. Egress: 4 stairs discharge at L1 through EXIT ONLY doors X4, X6, X9, X10 (D-033).

LAYOUT NOTES (KEYSTONE, ASSUMED — architect to confirm)

- Upper tier 15 ft deep: 5 rows x 36 in, 19 in risers (D-053; section P2-A-301 / A-302), stepping DOWN from the loop to the court (D-049). N / S bands now 132 ft (east shift); seat split by side changes, totals stay 1,100 + 1,100.
- 6 ft stretch strip on the N side. Exit separation, travel distance, structure NOT checked. Floor-to-floor 15 ft ASSUMED.

Sources: phase2.yaml (D-009, D-030, D-033, D-034, D-035, D-049, D-051-D-053, D-056, D-057); Shane 2026-10-04 9:10 AM CT; P2-G-003 Rev G; R-008, R-009, R-014, R-015, R-020, R-021; IBC 2021 Ch. 10 (UpCodes, Alabama); UFC 4-740-02N (retrieved 2026-10-04). Geometry: params/phase2_plan_rev_e.yaml.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	OVERALL FLOOR PLAN LEVEL 2 · BLOCK PLAN	1/32" = 1'-0"	October 2026	E	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-102