



PARCEL / PROPERTY LINES, SETBACKS, PARKING, UTILITIES, STORMWATER: TBD (D-006)

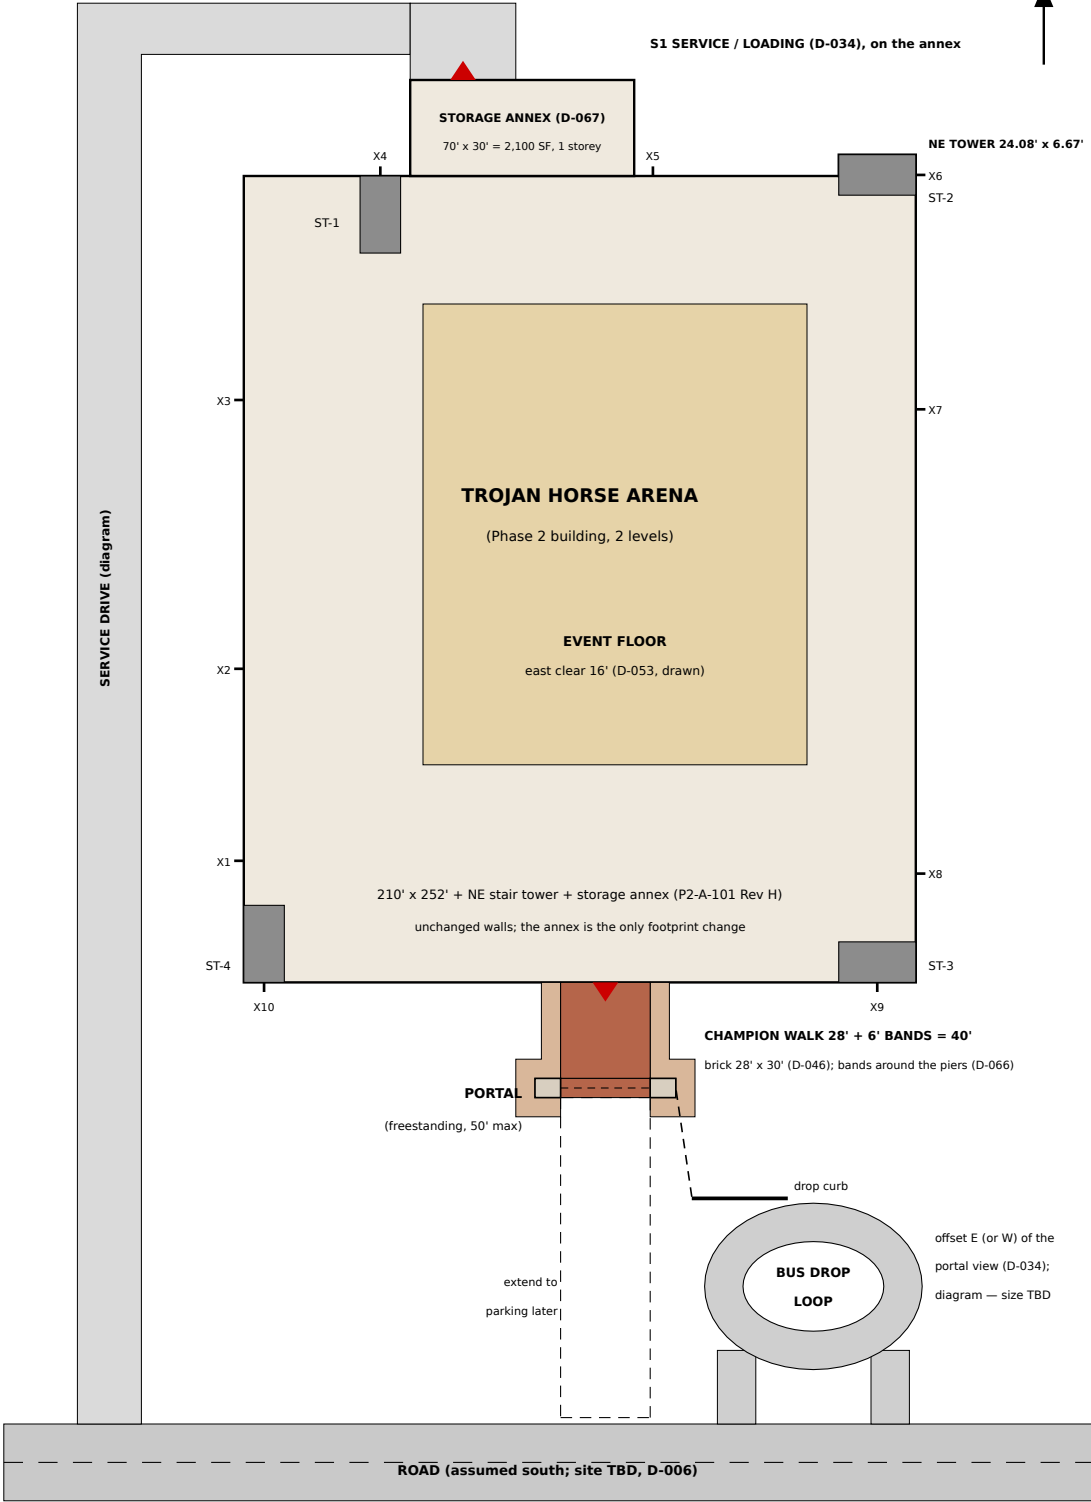

2 ENTRY — PORTAL + CHAMPION WALK — 1" = 30'

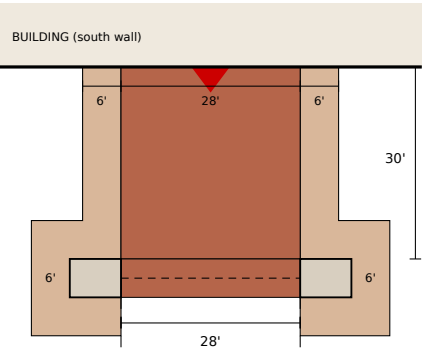

40' at the doors = 6 + 28 + 6 = 480 in ≥ 467.0 in (E1, standing margin)

bands pass outside both 8' piers: 6 + 28 + 6 = 40' at the portal (D-066)

LEGEND

- Building, P2-A-101 Rev H (210' + NE tower + annex)
- Exit stairs 76" clear (D-052)
- Event floor
- Champion Walk (brick, 28')
- Walk bands 6' each side (D-066)
- Portal piers (limestone)
- Service drive / apron (diagram)
- Bus drop loop (diagram)
- Road (assumed)
- E1 main entry / S1 service door

SIZE — D-057 (no cap, no margin; D-056)

	DRAWN Rev H	REV G drawn	CHANGE	PROGRAM J	DRAWN — PROG.
L1 FOOTPRINT	55,180.6	53,080.6	+2,100.0	56,515.1	−1,334.5
L2 AREA	28,932.6	28,932.6	±0.0	28,186.3	+746.3
TOTAL GSF	84,113.1	82,013.1	+2,100.0	84,701.4	−588.2

Drawn = P2-A-101/102 Rev H (L2 = L1 minus open-to-below; L2 unchanged). Program = P2-G-003 Rev J: footprint = the larger of L1 gross and arena volume + L2, plus L2 gross; Rev J adds the storage room gross. The change is the one-storey storage annex 70' x 30' = 2,100 SF (D-067). Size is set by budget and parcel (D-012, D-006).

STATUS

- SITE TBD (D-006): this is a layout diagram, not a site plan for permit. Parcel, property lines, setbacks, grading, parking count, utilities and stormwater are TBD. AHJ (R-006): Madison County Inspection Department if the parcel is unincorporated (Hazel Green is); the county states no zoning limits on construction; county codes 2018 IBC / IFC / NFPA 101; State Fire Marshal 2021 IFC.

ENTRY + EXIT DISCHARGE (D-066 DECIDED, Shane 1:22 PM CT)

- Freestanding limestone portal over the walk (D-043), 50' max (D-050), 44' wide x 6' deep with 8' piers and a 28' arch (ASSUMED), 30' south of the E1 doors (D-046). Champion Walk 28' x 30' brick (D-046) + a 6' band each side = 40' at the doors = 480 in ≥ 467.0 in (E1 at the standing margin, P2-G-002 Rev B; IBC 2021 1028.3). At the portal the bands pass outside both piers: 6 + 28 + 6 = 40'. Bands paved now, could be brick later (D-044). Band shape between doors and portal ASSUMED. Dashed: later extension to parking.

BUS + SERVICE (D-034 DECIDED defaults)

- South bus drop loop offset EAST so it does not block the portal view (west is equally allowed). Drop curb links to the walk's south end. Service / deliveries at S1, now on the storage annex's north wall (same x, 30' further north); the west-side drive and apron move north with it. Loop, drive and apron are diagrams: lane widths, turning templates and apron size TBD (civil).

BUILDING (AS DRAWN ON P2-A-101 REV H)

- 210' x 252' (unchanged) + NE stair tower + storage annex 70' x 30' on the north wall between X4 and X5, one storey (height ASSUMED, D-067). Chairs, tables and stage carts roll from the annex to the floor through equipment storage and the athlete corridor (P2-A-103 Rev B).

FIRE ACCESS / WATER (TBD)

- Fire apparatus access roads, hydrants and fire flow per IFC Appendices B, C, D (State Fire Marshal, 2021 IFC; D107 recommended) and the county's 2018 IFC. Exit discharge from X1-X10 to a public way (IBC 1028) TBD with the parcel.

1 SITE PLAN — CAMPUS DIAGRAM (SITE TBD)

1" = 60'-0" · north approximate · road assumed south · diagram only (no surveyed dimensions)

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena · Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

SITE PLAN — CAMPUS DIAGRAM
SITE TBD · SCHEMATIC

SCALE

AS
NOTED

DATE

October
2026

REV

D

DRAWN BY

Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-C-101