



PARCEL / PROPERTY LINES, SETBACKS, PARKING, UTILITIES, STORMWATER: TBD (D-006)

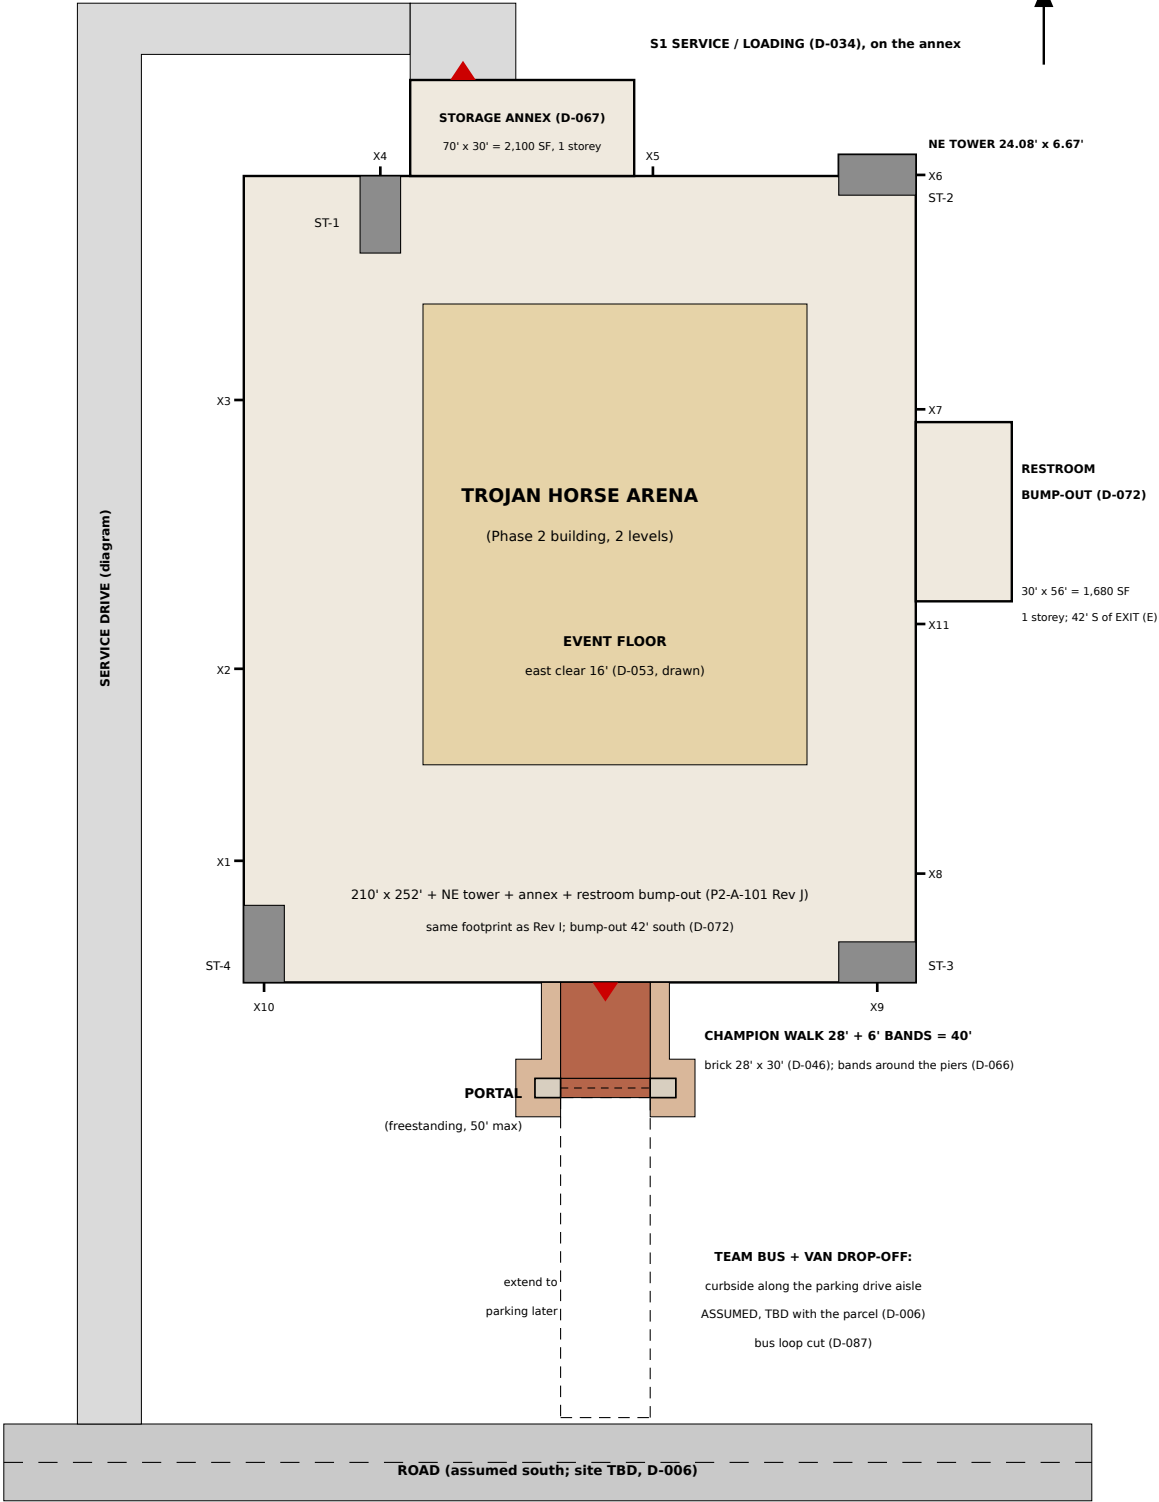

2 ENTRY — PORTAL + CHAMPION WALK — 1" = 30'

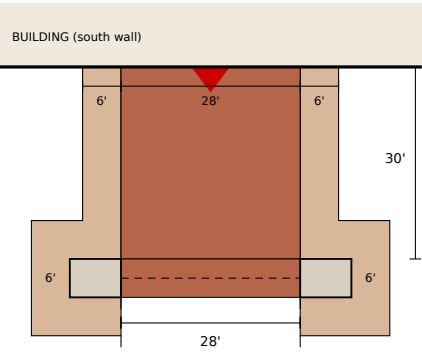

40' at the doors = 6 + 28 + 6 = 480 in ≥ 467.0 in (E1, standing margin)
bands pass outside both 8' piers: 6 + 28 + 6 = 40' at the portal (D-066)

LEGEND

- Building, P2-A-101 Rev J (210' + NE tower + annex + bump-out)
- Exit stairs 76" clear (D-052)
- Event floor
- Champion Walk (brick, 28')
- Walk bands 6' each side (D-066)
- Portal piers (limestone)
- Service drive / apron (diagram)
- Road (assumed)
- E1 main entry / S1 service door

SIZE — D-057 (no cap, no margin; D-056)

	DRAWN Rev J	REV I drawn	CHANGE	PROGRAM K	DRAWN — PROG.
L1 FOOTPRINT	56,860.6	56,860.6	±0.0	58,195.1	−1,334.5
L2 AREA	28,932.6	28,932.6	±0.0	28,186.3	+746.3
TOTAL GSF	85,793.1	85,793.1	±0.0	86,381.4	−588.2

Drawn = P2-A-101 Rev J / A-102 Rev F. Program = P2-G-003 Rev K (unchanged). No change vs Rev I: the 30' x 56' bump-out (1,680 SF) slid 42' south and the public corridor came out of Mech (E) (D-072). Size is set by budget and parcel (D-012, D-006).

STATUS

- SITE TBD (D-006): this is a layout diagram, not a site plan for permit. Parcel, property lines, setbacks, grading, parking count, utilities and stormwater are TBD. AHJ (R-006): Madison County Inspection Department if the parcel is unincorporated (Hazel Green is); the county states no zoning limits on construction; county codes 2018 IBC / IFC / NFPA 101; State Fire Marshal 2021 IFC.

ENTRY + EXIT DISCHARGE (D-066 DECIDED, Shane 1:22 PM CT)

- Freestanding limestone portal over the walk (D-043), 50' max (D-050), 44' wide x 6' deep with 8' piers and a 28' arch (ASSUMED), 30' south of the E1 doors (D-046). Champion Walk 28' x 30' brick (D-046) + a 6' band each side = 40' at the doors = 480 in ≥ 467.0 in (E1 at the standing margin, P2-G-002 Rev B; IBC 2021 1028.3). At the portal the bands pass outside both piers: 6 + 28 + 6 = 40'. Bands paved now, could be brick later (D-044). Band shape between doors and portal ASSUMED. Dashed: later extension to parking.

TEAM BUS + SERVICE (D-087, Shane 2026-10-09 1:05 PM CT; D-034 service unchanged)

- Bus loop CUT (D-087 changes the south bus drop loop part of D-034). Team bus + van drop-off: curbside along the parking drive aisle, ASSUMED, TBD with the parcel (D-006); no loop drawn. Service / deliveries stay at north door S1 on the storage annex; the west-side drive and apron are diagrams (lane widths, turning templates, apron size TBD, civil).

BUILDING (AS DRAWN ON P2-A-101 REV J)


- 210' x 252' (unchanged) + NE stair tower + storage annex 70' x 30' (D-067) + restroom bump-out 30' x 56' on the east wall, now 42' further south and entirely south of EXIT (E) (D-072), one storey. X7 is back on the building wall; new exit X11 off the public corridor, just south of the bump-out. X7 / X11 discharge paths to a public way TBD with the parcel (D-006).

FIRE ACCESS / WATER (TBD)

- Fire apparatus access roads, hydrants and fire flow per IFC Appendices B, C, D (State Fire Marshal, 2021 IFC; D107 recommended) and the county's 2018 IFC. Exit discharge from X1-X11 to a public way (IBC 1028) TBD with the parcel.

1 SITE PLAN — CAMPUS DIAGRAM (SITE TBD)

1" = 60'-0" · north approximate · road assumed south · diagram only (no surveyed dimensions)



PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena · Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

SITE PLAN — CAMPUS DIAGRAM
SITE TBD · SCHEMATIC

SCALE

AS
NOTED

DATE

October
2026

REV

G

DRAWN BY

Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-C-101