



TROJAN HORSE ARENA

Hazel Green Regional Athletic Complex

Hazel Green area, Madison County, Alabama (site TBD, D-006)

PHASE 2 — SCHEMATIC DESIGN SET · REV B

Program package for the Alabama-registered architect of record · October 2026

PROJECT

Building	Indoor athletic arena, 2 levels; 210 x 252 ft + NE stair tower, + storage annex (north) + restroom bump-out (east)
Owner / client	Shane Brazelton (owner of record OPEN, D-007)
Site	TBD — unincorporated Hazel Green, Madison County, AL (D-006)
Code basis	IBC 2021 ASSUMED; county on 2018, State Fire Marshal on 2021 — AHJ to confirm (D-008)
Occupancy	A-4 main (arena), nonseparated mixed, fully sprinklered (ASSUMED, P2-G-002)
Construction type	TBD (architect)

GENERAL NOTES

- PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION. Schematic program package only; not a code review, not sealed.
- Alabama requires a registered architect for this assembly building (Ala. Admin. Code 100-X-4-.03). This set is the program for that architect, who sets door widths, construction type, structure and MEP.
- Labels on every sheet: DECIDED = Shane's decision (D-####); ASSUMED = KEYSTONE / Claude placeholder; CITED = code or source reference.
- Drawn by AI (KEYSTONE / Claude) for Shane Brazelton. Older revisions are frozen history; new revisions are new files.

SHEET INDEX — PHASE 2 SCHEMATIC SET REV B (sheet-number order)

SHEET	TITLE	REV	STATUS
P2-G-001	Cover sheet — sheet index + decisions	A	NEW (this sheet)
P2-G-002	Code analysis (schematic)	C	IN REVIEW (last approved Rev A)
P2-G-003	Program test-fit — program + loop + storage + restrooms	K	IN REVIEW (last approved Rev H)
P2-C-101	Site plan — campus diagram (site TBD)	E	IN REVIEW (no rev approved yet)
P2-A-101	Overall floor plan — Level 1 (block plan)	I	IN REVIEW (last approved Rev D)
P2-A-102	Overall floor plan — Level 2 (block plan)	F	IN REVIEW (last approved Rev D)
P2-A-103	Floor overlays — mats, seating + conversions	B	IN REVIEW (last approved Rev A)
P2-A-111	Life safety plan — Levels 1 + 2	C	IN REVIEW (last approved Rev A)
P2-A-201	Exterior elevations	H	IN REVIEW (last approved Rev F)
P2-A-301	Building sections	D	IN REVIEW (no rev approved yet)
P2-A-302	Sight-line study	C	IN REVIEW (no rev approved yet)
P2-A-401	Enlarged plans — locker rooms + restroom core 2	C	IN REVIEW (last approved Rev A)
P2-A-901	3D massing model — views	C	IN REVIEW (no rev approved yet)

IN REVIEW = drawn after Shane's decisions, awaiting his sign-off. Phase 2 Schematic Set Rev A (G-003 F, A-101 D, A-102 D; D-036) stays frozen. P2-A-103 Rev B predates D-069: the floor chair layouts still need an aisle kept open to V2 (next A-103 rev).

SIZE — D-057 (drawn, R-021 method; no SF cap, D-056)

	SET REV B	REV H	CHANGE	SET REV A	CHANGE
Level 1 footprint	56,861	55,181	+1,680	51,503	+5,358
Level 2 area	28,933	28,933	0	28,363	+570
TOTAL GSF	85,793	84,113	+1,680	79,866	+5,927

Rev H = plan before the D-069 bump-out (+1,680 SF, L1 only). Set Rev A = plan Rev D (frozen baseline, D-036). Program total on P2-G-003 Rev K: 86,381 GSF (drawn – program = –588).

KEY FACTS (as drawn)

- Event floor 120 x 144 ft drawn (16,400 SF program, D-030); 4 x 42 ft mats, 2 x 2 (D-014).
- 2,200 seats = 1,100 telescopic lower + 1,100 fixed upper; upper tier steps down from the L2 loop, 21 in risers (D-009, D-049, D-061); east seats 16 ft from the mats (D-053).
- Level 2 FF 17'-9" (D-061); 2-lane running / training loop (D-035, D-037); roofs: ring 32.75 ft, arena 42 ft, structure underside 36 ft (ASSUMED).
- Exits: E1 main = 8-pair door bank, 512 in clear, single controlled entry (D-033, Option 1 11:07 AM CT); 4 stairs x 76 in, 31 risers (D-051, D-052). 7'-6" clear under the upper-tier front, zero margin (structure ≤ 1'-6" ASSUMED).
- Restrooms (chairs-only case, load 3,446): lobby core + core 2 = 22 men's / 42 women's WC, 9 / 12 lav, 4 DF (D-064, D-069, D-070).
- Event lockers 4 x 900 = 3,600 SF (D-060); chair / table / stage storage annex 2,100 SF on the north wall with S1 (D-067).

DECISIONS SUMMARY (DECIDED — Shane; full log: DECISIONS.md)

D-###	DECISION
D-030	Two-level program around a 16,400 SF event floor; 2,200 seats (with D-009, D-032).
D-033	Single controlled public entry at E1; E1 = 8-pair door bank (Option 1, 11:07 AM CT).
D-034	Deliveries at north door S1 (staff only); bus loop south, offset from the portal view.
D-035/037	Continuous Level 2 running / training loop, 2 lanes x 42 in.
D-039	SW flex / storage and team assembly kept as drawn.
D-041	Official mark = Shane's circular horse-head badge; red #CC0000 / black.
D-043/050	Grand Entrance Portal freestanding over the Champion Walk; ≤ 50 ft, arch crown 34 ft (structural engineer required).
D-045/047	Portal arch underside crimson, gold trim; badge 11 ft dia + 27 in wordmark.
D-046/066	Champion Walk 28 ft brick, widened to 40 ft at the doors (6 ft paved bands); 4x8 / 8x8 donor bricks.
D-049/053/061	Upper tier steps down from the L2 loop; east seats 16 ft from mats; L2 FF 17'-9", 21 in risers.
D-051/052	4 exit stairs x 76 in clear, intermediate handrails; landing ≥ stair width.
D-054	Floor uses: sports + chairs-only events (graduations, banquets, expos). No standing-concert design.
D-056/057	No SF cap — size set by budget + parcel; every area table shows L1, L2, total, change.
D-060	Event lockers back to full 3,600 SF behind the tier.
D-064	L1 restrooms sized to the chairs-only case; posted loads per configuration; temp units beyond.
D-065	Security screening in a side bay of the lobby, off the egress path.
D-067	Chair / table / stage storage (~2,350 chairs + tables + stage) near the floor and S1.
D-069/070	Second restroom pair (core 2) in a one-storey 30 x 56 ft bump-out on the EAST wall at V2.

OPEN — OWNER / ARCHITECT / ENGINEER

- D-006: Site / parcel (drives X7 discharge, bus loop, utilities, site work)
 - D-007: Owner of record
 - D-008: Code edition + AHJ pre-application (Madison County)
 - D-012: Phase 2 budget target (ROM estimate in progress)
 - D-042: Trademark search before signage / apparel
 - D-044: Donor-brick program + pricing
 - D-010/011/013: Locker parity, concessions scope, girls 3,503 SF tag
 - Structural: Upper-tier structure depth ≤ 1'-6" (7'-6" clear, zero margin); portal + arch
 - MEP: Core-2 plumbing routing and 16 ft bump-out height (ASSUMED)
 - Architect: Door widths + hardware, construction type, allowable area, smoke-protected seating
- Red = owner decisions (Shane). Others go to the architect of record / engineers.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	COVER SHEET SHEET INDEX + DECISIONS	NTS	October 2026	A	Drawn by Claude (AI) for Shane Brazelton	P2-G-001

CODE ANALYSIS — SCHEMATIC (REV C) · P2-A-101 REV I / A-102 REV F · P2-G-003 REV K · D-069 CLOSED

Design basis for the architect of record and the AHJ. Not a code review and no statement of approval: every line needs architect + AHJ confirmation (D-008). Values from KEYSTONE research notes; IBC 2021 text read on UpCodes (Alabama).

1 CODE BASIS + EDITIONS (R-006)

CODE	DESIGNED TO	COUNTY 2018 / STATE
Building	IBC 2021 (ASSUMED, Shane)	IBC 2018 (Madison County, since 2021-01-01)
Fire	IFC 2021 (State Fire Marshal; App. B, C, D)	IFC 2018 (county)
Life safety	not reviewed	NFPA 101 2018 (county); ch. 12 new assembly
Plumbing	IPC 2021 / IBC 2021 ch. 29 (ASSUMED)	IPC 2018; arena row of T2902.1 reads the same (R-009)
Assembly egress	IBC 2021 §1030.x	IBC 2018 §1029.x (same subsections; excerpts only, UNVERIFIED)
Energy / electrical	not checked	IECC 2015 (state) / NEC 2017

STATUS of every edition line: 2021 ASSUMED (Shane) — verify with AHJ (D-008 OPEN). Factors read in the 2021 text only; 2018 / NFPA 101 equivalence NOT verified (R-006.2).

AHJ: Madison County Inspection Department if the parcel is unincorporated (Hazel Green is; R-006.1, MEDIUM). DCM 'schoolhouse' review question OPEN. Assembly building needs a registered architect (Ala. Admin. Code 100-X-4-.03).

2 OCCUPANCY (R-007.1)

SPACE	GROUP	CITE (IBC 2021) / CONFIDENCE
Bowl + event floor	A-4	303.5 ('arenas'); HIGH
S&C, cross-training	A-3 or B	303.4 / 304.1 (training); MEDIUM
Admin, first aid	B	304.1
Storage, equipment, mech	S-1	R-007.1 (likely group)
Locker rooms, event lockers	A-4 or B	R-007.1
Mixed occupancy: nonseparated (508.3.1) with A-4 as the main occupancy, fully sprinklered — KEYSTONE recommendation, architect chooses (accessory 508.2 or separated 508.4 also possible).		

3 CONSTRUCTION TYPE

Construction type TBD (architect). Allowable height / area (IBC Tables 504.3, 504.4, 506.2) NOT checked. Inputs for that check: 2 stories, L2 FF 17'-9" (D-061), arena roof 42' ASSUMED, fully sprinklered. Drawn size (D-057, P2-A-101 Rev I incl. the 2,100 SF storage annex + 1,680 SF restroom bump-out / A-102 Rev F): L1 56,860.6 / L2 28,932.6 / TOTAL 85,793.1 GSF (R-021 method).

4 FIRE PROTECTION + SYSTEMS (ASSUMED)

- Automatic sprinklers throughout (903.3.1.1, ASSUMED): 903.2.1.4 triggers for A-4 — fire area > 12,000 SF, occupant load >= 300, floor other than exit discharge; all three met (R-015.5).
- Emergency voice/alarm (907.2.1.1: Group A, occupant load >= 1,000; 907.5.2.2) ASSUMED (R-015.5).
- Sprinklers + voice alarm allow 0.2 in/occupant for stairs (1005.3.1 exc. 1) and 0.15 in for doors and other components (1005.3.2 exc.) (R-018.2, R-015.6).
- Smoke-protected seating NOT assumed (1030.6.2 needs smoke control per 909 + a life safety evaluation; NFPA 101 not reviewed). If used: 1030.6.2.2 roof >= 15' above the highest aisle (loop 17.75') = 32.75'; arena U/S structure 36' drawn (R-022 §5).
- Group A: post the occupant load (1004.9); fire safety + evacuation plan with a seating plan (IFC 403.2.1); telescopic seating per ICC 300 (1030.1.1) (R-007.2).

5 TRAVEL DISTANCE + COMMON PATH

- Exit access travel (T1017.2, A sprinklered): 250 ft. L2 worst measured ≈ 141 ft (R-018.4, Rev D plan; not re-measured on Rev F). L1 (P2-A-111 Rev C, plan Rev I): event floor centre → V2 → EXIT (E) + core-2 corridor → X7 (moved 30 ft east) ≈ 163 ft ≤ 250 (diagram measurement, UNVERIFIED).
- Common path: seats 30 ft to two directions (1030.8; rows not drawn, TBD). Spaces with one exit: T1006.2.1 Group A 49 occupants / 75 ft — locker rooms (71 each) have 2 exits (X2 / X3 + corridor); event lockers (18 each) one door OK if the common path <= 75 ft (TBD).
- Stepped aisles, handrails, guards (1030.9, 1030.16, 1030.17): TBD with the seating layout (R-018.4-5).

6 OCCUPANT LOAD BY SPACE (IBC 2021 T1004.5 / 1004.6; R-007.2)

SPACE (drawn: A-101 Rev I, A-102 Rev F)	AREA SF	FACTOR	LOAD
LEVEL 1			
Lower tier seats (telescopic)		seats	1,100
Boys locker	3,507	50 gross	71
Girls locker	3,507	50 gross	71
Event lockers 1-4	3,600	50 gross	72
Flex / team assembly	2,008	15 net	134
Flex / storage (SW)	975	300 gross	4
Equipment storage + room	1,000	300 gross	4
Mech / elec (4 rooms)	3,881	300 gross	15
First aid	120	150 gross	1
Concession	275	200 gross	2
Chair / table / stage storage (annex, D-067)	2,100	300 gross	7

L1 without the event floor			1,481
Event floor — DESIGN: chairs only (D-054)	16,416	7 net	2,346

L1 TOTAL, design case (all cases: table 7) 3,827

LEVEL 2			
Upper tier seats (fixed)		seats	1,100
Strength & conditioning	5,124	50 gross	103
Cross-training	3,500	50 gross	70
Admin	470	150 gross	4

L2 BASE			
+ loop counted as exercise (R-018 a)	5,026	50 gross	101
+ standing at the W rail (R-018 b)	420	5 net	84

L2 WORST CASE (design, D-052) 1,462

Not added (same occupants moving through; R-018.1 method): lobby, concourses, athlete corridor / route, vestibule, restrooms, stairs. The AHJ may count waiting / standing space. Telescopic tier: number of seats (1004.6); if benches: 1 per 18 in of seat length (row lengths not drawn — may raise the count). Higher posted load by approval up to 1 per 7 SF with a seating diagram (1004.5.1). Event floor area 114 x 144 ft (R-007.2 / D-054; the locked program value is 16,400 SF, D-030).

7 FLOOR CASES — CHAIRS-ONLY (D-054) · POSTED (1004.9)

CASE (T1004.5)	FLOOR	L1	BLDG	POSTED SIGN
Sports (exercise 50 gross, ASSUMED)	329	1,810	3,272	POST
Tables + chairs (15 net)	1,095	2,576	4,038	POST
Chairs only (7 net)	2,346	3,827	5,289	POST (design)
Standing (5 net)	3,284	4,765	6,227	not a use (exit margin)

D-054 DECIDED (Shane 1:22 PM CT): event floor = CHAIRS-ONLY (7 net): graduations, banquets, expos; no standing-concert design. L1 exits stay as drawn for standing (extra margin, no change). IBC 2021 1004.9: the occupant load of a Group A room or space shall be posted in a conspicuous place near the main exit or exit access doorway; one sign per configuration (D-064 Option 2). Not permitted: standing (not a design use, D-054); anything larger than chairs-only needs temporary restroom units (D-064). L2 at its worst case (1,462, D-052).

8 PLUMBING FIXTURE BASIS (R-009)

IPC 2021 ASSUMED (IBC 2021 T2902.1 assembly — arenas; 50/50 split 2902.1.1; urinals <= 67% of male WC, IPC 424.2). 2018 arena row reads the same (R-009). Fixture loads = P2-G-003 Rev I (seats + event floor at 50 gross).

LEVEL (FIXTURE LOAD)	WC M	WC F	LAV M	LAV F	DF	SS
L1 lobby core (rooms 4 + 5)	10	18	4	5	2	1
L1 core 2, east (incl. 7 urinals)	12	24	5	7	2	1
L1 REQUIRED, chairs (3,446)	22	42	9	12	4	1
L1 DRAWN — MEETS (D-069)	22	42	9	12	4	2
L2 drawn (upper seats 1,100)	8	14	3	4	2	1

D-069 CLOSED = Option 2 (Shane 3:31 PM CT): core 2 in a one-storey 30 x 56 ft bump-out, east wall at V2; SW FLEX unchanged (D-039). East confirmed (D-070). Urinals 7 ≤ 14 (IPC 424.2). Larger events: temporary units (D-064).

9 LEVEL 1 EXIT CAPACITY — E1 BANK 512 in (doors 0.15 in/occ.)

Doors and other components 0.15 in per occupant (1005.3.2 exc.: sprinklers 903.3.1.1 + voice alarm 907.5.2.2). E1 = 8-pair bank, 512 in clear (Option 1 DECIDED, 64 in per pair ASSUMED); X1-X10 = 10 x 64 in. Provided 1,152 in. Stair discharge doors carry the L2 worst case first (54.8 in each).

CHECK (in)	329	1,095	2,346	3,284	PROV.
Total at grade (L1 + L2)	490.8	605.7	793.4	934.0	1,152.0
Main exit E1 >= 1/2 (1030.2)	245.4	302.8	396.7	467.0	512.0
Other L1 exits >= 1/2 L1 (1030.3)	135.8	193.2	287.0	357.4	420.7
Lose E1 >= 50% (1005.5)	245.4	302.8	396.7	467.0	640.0

Design case = chairs (2,346 on the floor; building 5,289): E1 needs 396.7 in vs 512 (PASS). Standing (6,227) is kept as margin only: E1 467.0 in, total 934.0 vs 1,152 in (PASS). Exits stay as drawn (D-054).

10 SCREENING BAY + DISCHARGE (D-065, D-066 DECIDED)

- Screening in a side bay of the lobby (P2-A-101 Rev I): clear lobby beside it 39 ft = 468 in ≥ 396.7 (chairs) and ≥ 467.0 (standing margin): PASS; lanes, tables and queues stay in the bay (1003.6, 1010.5). Accessible screening by wand beside the lanes (WTMD passage 32.3 in x 26 in deep vs ADA 403.5.1).
- Exit discharge (1028.3): walk 40 ft at the doors = 28 ft brick + 2 x 6 ft = 480 in ≥ 467.0; bands pass outside both portal piers (28 + 6 + 6 = 40 ft at the portal). P2-C-101 Rev E; public way TBD (site, D-006).

11 LEVEL 2 EGRESS (R-018, D-052)

Stairs 0.2 in per occupant (1005.3.1 exc. 1): 4 stairs x 76 in = 304 in. Worst 1,462 x 0.2 = 292.4 in → spare 11.6 in. Lose one stair: 228 in ≥ 146.2 in (1005.5). 4 exits (T1006.3.3). Unchanged from Rev A.

12 OPEN ITEMS FOR THE ARCHITECT / AHJ

- Code editions + AHJ (D-008): 2021 vs 2018 / NFPA 101 — pre-application meeting with Madison County.
- Core 2 (D-069 CLOSED): plumbing routing + 16 ft height ASSUMED (MEP); X7 discharge to a public way TBD (1028, D-006); chair layouts keep an aisle to V2.
- Door widths, hardware, main-exit frontage (1030.2: street or 10 ft open space) — architect.
- Construction type + allowable area (ch. 5 / 6) — architect.
- Smoke-protected seating or not (1030.6.2) — architect / AHJ.
- Upper-tier structure 1'-6" ASSUMED (structural engineer): front-row clear is exactly 7'-6" (1003.2), zero margin.
- Seat type on the telescopic tier (benches: 1 per 18 in) and the seating layout (aisles, rails, guards).

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	CODE ANALYSIS SCHEMATIC	NTS	October 2026	C	Drawn by Claude (AI) for Shane Brazelton	P2-G-002

1 AREA BY LEVEL — 2,200 SEATS, L2 LOOP, ANNEX + BUMP-OUT (D-069)

SPACE	REV K	REV J	BASIS
LEVEL 1 (net SF)			
Event floor 16,400 + 864 east clear zone	17,264	17,264	D-030 · D-053 east tier 16 ft
Lower tier seats (1,100), TELESCOPIC	3,719	3,719	3.38 SF/seat (R-008) · fixed col. 6.0
Boys Locker Room	3,500	3,500	phase2.yaml tag
Girls Locker Room (D-013)	3,503	3,503	phase2.yaml tag; D-013 open
Event / visitor locker rooms	3,600	3,600	4 x (14 wrestlers + 4 staff) x 50 SF
Foyer / trophy lobby (hall of champions)	800	800	200 + 400 + 200 (Loudoun 2014)
Lower concourse	1,375	1,375	25% of seats x 5 SF standing (T1004.5)
Public restrooms L1 (37 WC + lav)	1,850	1,850	T2902.1 WC+lav x 50 SF (R-009)
Concession stand	275	275	Loudoun kitchen proxy; D-011
First aid	120	120	Loudoun 2014; 1 room counted
Equipment storage (mats + floor covers)	700	700	Loudoun gym storage proxy
Equipment room	300	300	Loudoun equip./maint. proxy
Stairs (4 x 76 in, 31 risers) + elevator	1,284	1,284	D-061 17'-9" · D-052 · D-051
L1 net	38,290	38,290	
Mechanical (5% of total gross, at grade)	4,056	4,056	R-014 · LOW
L1 GROSS (x 1.25)	52,933	52,933	R-014 gross-up
+ Chair / table / stage storage annex (gross)	2,100	2,100	D-067 · 2.0 aisle factor, no x1.25
+ Restroom bump-out, core 2 (gross)	1,680	—	D-069 · drawn 30 x 56 ft, no x1.25
L1 GROSS incl. annex + bump-out	56,713	55,033	both one storey (A-101 I)
LEVEL 2 (net SF)			
Upper tier seats (1,100), FIXED	6,600	6,600	6.0 SF/seat (R-008)
Strength & Conditioning	5,224	5,224	D-035 (as Rev F)
Cross-Training Mat Area	3,500	3,500	D-035 (as Rev F)
Administrative office	470	470	150 + 120 + 200 (Loudoun 2014)
Upper concourse / balcony	—	—	the loop replaces it (D-035)
Public restrooms L2 (29 WC + lav)	1,450	1,450	T2902.1 WC+lav x 50 SF (R-009)
Stairs (4 x 76 in, 31 risers) + elevator	1,284	1,284	D-061 17'-9" · D-052 · D-051
L2 net rooms (without the loop)	18,528	18,528	
Running / training loop (drawn, not grossed up)	5,026	5,026	A-102 Rev F (= Rev E) · no x1.25
L2 GROSS (x 1.25 rooms + loop)	28,186	28,186	
Arena volume gross (floor + east zone + lower tier)	26,229	26,229	
Arena volume + L2 gross	54,415	54,415	L2 sits over the L1 ring
PROGRAM FOOTPRINT = max + annex + bump-out	58,195	56,515	max(L1, AV + L2): arena volume + L2 + 2,...
PROGRAM TOTAL GSF (L1 gross + L2 gross)	84,899	83,219	no cap (D-056)

SIZE — D-057: L1 FOOTPRINT · L2 AREA · TOTAL GSF · CHANGE vs LAST REV (no cap, no margin)							
	DRAWN	REV H	CHANGE	PROGRAM	REV J	CHANGE	DRAWN – PROG.
	A-101 I / 102 F	drawn	vs Rev H	G-003 K	program	vs Rev J	(C-3)
L1 FOOTPRINT	56,861	55,181	+1,680	58,195	56,515	+1,680	−1,335
L2 AREA	28,933	28,933	±0	28,186	28,186	±0	+746
TOTAL GSF	85,793	84,113	+1,680	86,381	84,701	+1,680	−588

Program TOTAL here = program footprint + L2 gross (86,381); L1 + L2 gross = 84,899 (+1,680 vs Rev J). REV K = Rev J + the D-069 restroom bump-out (Option 2, Shane 3:31 PM CT): core 2, 1,680 SF one storey on the east wall at V2 / EXIT (E), added gross like the annex (its 30 x 56 ft is the drawn test-fit incl. +10 % walls / chases and the corridor; ASSUMED; 50 SF / fixture would be 2,400). Drawn sizes are measured on P2-A-101 Rev I / A-102 Rev F: L1 grows by the bump-out only, L2 unchanged. The program footprint carries 1,482 SF of L1 ring that no program line counts (R-021).

2 SEATS BY SIDE AND TIER = 2,200 (REV I PLAN)

SIDE	LOWER (TELE.)	UPPER (FIXED)	TOTAL
North	359	314	673
South	347	314	661
East	394	472	866
TOTAL	1,100	1,100	2,200
capacity drawn	1,349	1,155	2,504

No west tier (OK'd). Lower: 6 rows x 24 in = 12 ft extended (R-008), less the 12 ft portal and two 8 ft vomitories. Upper: 15 ft, 5 rows x 36 in at 21 in risers from the L2 loop at 17'-9" down to a 9.0 ft front row = 7'-6" clear under row 1 (D-061), 6.0 SF/seat. Each tier = 1,100, split by side in proportion to drawn capacity (P2-A-101/102 Rev F). Split unchanged from Rev G/H; no seats lost. Upper spare 55.

3 LEVEL 2 RUNNING / TRAINING LOOP (D-035)

2 lanes x 42 in = 7 ft all around, squared corners. Centerline 154 x 205 ft: 2 x (154 + 205) = 718 ft; 5,280 / 718 = 7.35 laps/mile. Area 5,026 SF. Lanes: UFC 4-740-02N 4.1.7 (42 in, min 3 lanes), Athletic Business (36-42 in; max 12 laps/mile, 8-10 preferred). 2 lanes is ASSUMED: 3 lanes (10.5 ft) does not fit without moving the upper tier. Event days: upper concourse, spectators cross it at the tier entries; non-event days: training. 42 in guards at open edges (IBC 1015.2, 1015.3). East leg 6 ft further east (D-053).

4 FIXTURES BY LEVEL (IBC 2021 T2902.1)

LEVEL	LOAD	WC M	WC W	LAV M	LAV W	DF	WC+LAV	SUM
SUM incl. 4 drinking fountains								
L1	1,428	10	18	4	5	2	37	39
L2	1,100	8	14	3	4	2	29	31
TOTAL	2,528	18	32	7	9	4	66	70
L1 req.	3,446	22	42	9	12	4	85	89
· lobby core		10	18	4	5	2	37	39
· core 2 (E)		5+7u	24	5	7	2	48	50

L1 / L2 rows = the Rev I set the program lines carry (L1 = lower seats + 328 floor at 50 SF). D-069 DECIDED Option 2: L1 chairs-only (3,446) = lobby core (rooms 4 + 5, as drawn) + core 2 in the east bump-out (rooms 25-27): 22 / 42 WC, 9 / 12 lav, 4 DF — PASS. Core-2 urinals $7 \leq 8$ (67 % of 12, IPC 2021 424.2). Larger events: posted loads (1004.9), temporary units.

SUM incl. 4 drinking fountains (2 per level, T2902.1). Restroom SF uses WC+LAV only (66 x 50 SF, ASSUMED); fountains sit outside the rooms. Rev G's SUM column was WC+LAV (66). 1 service sink per level (not counted).

5 STAIRS, ELEVATOR, WHEELCHAIR

4 stairs (T1006.3.3) x 76 in (D-052: worst case 1,462 x 0.2 in = 292.4 in $\leq$ 4 x 76 = 304 in). 17'-9" floor-to-floor (D-061): 31 risers of 6.87 in ($\leq$ 7 in, 1011.5.2), 2 flights (16 + 15), 165 in run, intermediate landing = width (D-051): 12.67 x 24.08 ft $\approx$ 305 SF each per level + 1 elevator (1104.4) = 1,284 SF per level, aligned on both levels. 18 wheelchair spaces + companions (IBC T1109.2.2.1, ADA 221.3), dispersed (ADA 221.2.3), architect to place. NE stair tower 24.08 x 6.67 ft (was 21.33 x 6.67).

6 RESULT

DRAWN SIZE (A-101/102 REV I) L1 56,861 · L2 28,933 SF TOTAL 85,793 GSF (+1,680 vs Rev H) 2,200 seats · loop 718 ft · 7.35 laps/mi No SF cap (D-056) · size = budget + parcel

Drawn building = 210 x 252 ft + 24.08 x 6.67 ft NE stair tower = 53,081 SF. Program footprint 58,195 (+5,115 vs drawn): the program grosses up the open arena box; the drawing absorbs the 31-riser stairs in the box and draws the lobby void (R-021). Event floor drawn 120 x 144 = 17,280 SF. + annex 2,100 + bump-out 1,680 SF.

7 LOCKED IN phase2.yaml

- Event floor 16,400 SF; 4 x 42 ft mats, 2 x 2 (D-030).
- 2,200 seats in the bowl, N, S and E sides; 2 levels; no SF cap (D-056, D-031 retired).
- Seating MIX: telescopic lower tier, fixed upper tier (D-009, Shane 4:30 AM CT).
- S&C 5,224 + cross-training 3,500 SF on Level 2 (D-035; were 6,000 / 4,000).
- Continuous L2 loop, 2 x 42 in (D-035). 76 in stairs (D-052); east tier 16 ft (D-053). L2 17'-9", 21 in upper risers (D-061).
- Chairs floor 2,346 (D-054); annex 2,100 (D-067); 2 restroom cores (D-069).

8 STILL OPEN

- X7 discharge east to a public way; core-2 plumbing (D-006, MEP).
- Loop lane count (2 ASSUMED; 3 preferred); 50/50 tier split and 6 telescopic rows (ASSUMED).
- Front row 7'-6" clear assumes $\approx$ 1'-6" deck structure (no margin, IBC 1003.2): structural engineer to confirm.
- AHJ / code edition (D-008); girls locker size (D-013); concession scope (D-011); owner (D-007); site (D-006).
- Suites PARKED (future add-on).

9 CITED vs ASSUMED

CITED: seat SF and row depth (R-008), fixtures, egress and wheelchair tables (R-009, R-015, R-016), gross-up and mechanical share (R-014), lane width (UFC 4-740-02N, Athletic Business), guards (IBC 1015). ASSUMED: 2 lanes, loop not grossed up, east zone grossed up like the floor, 50/50 tiers, 6 rows, 50 SF/fixture, box shape.


10 SOURCES (retrieved 2026-10-04)

- Shane 2026-10-04 3:31 PM CT (Rev K: D-069 CLOSED = Option 2, east restroom bump-out, fixture split)
- R-008, R-009, R-014-R-016, R-020; IPC 2021 424.2; IBC 2021 T2902.1, 2902.3.3, 1004.9
- Revs F-I frozen; Rev J in review; history in Revs A-J


PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	PROGRAM + LOOP + STORAGE + RESTROOMS REV I PLAN · D-069 · D-057	NTS	October 2026	K	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-G-003

PARCEL / PROPERTY LINES, SETBACKS, PARKING, UTILITIES, STORMWATER: TBD (D-006)

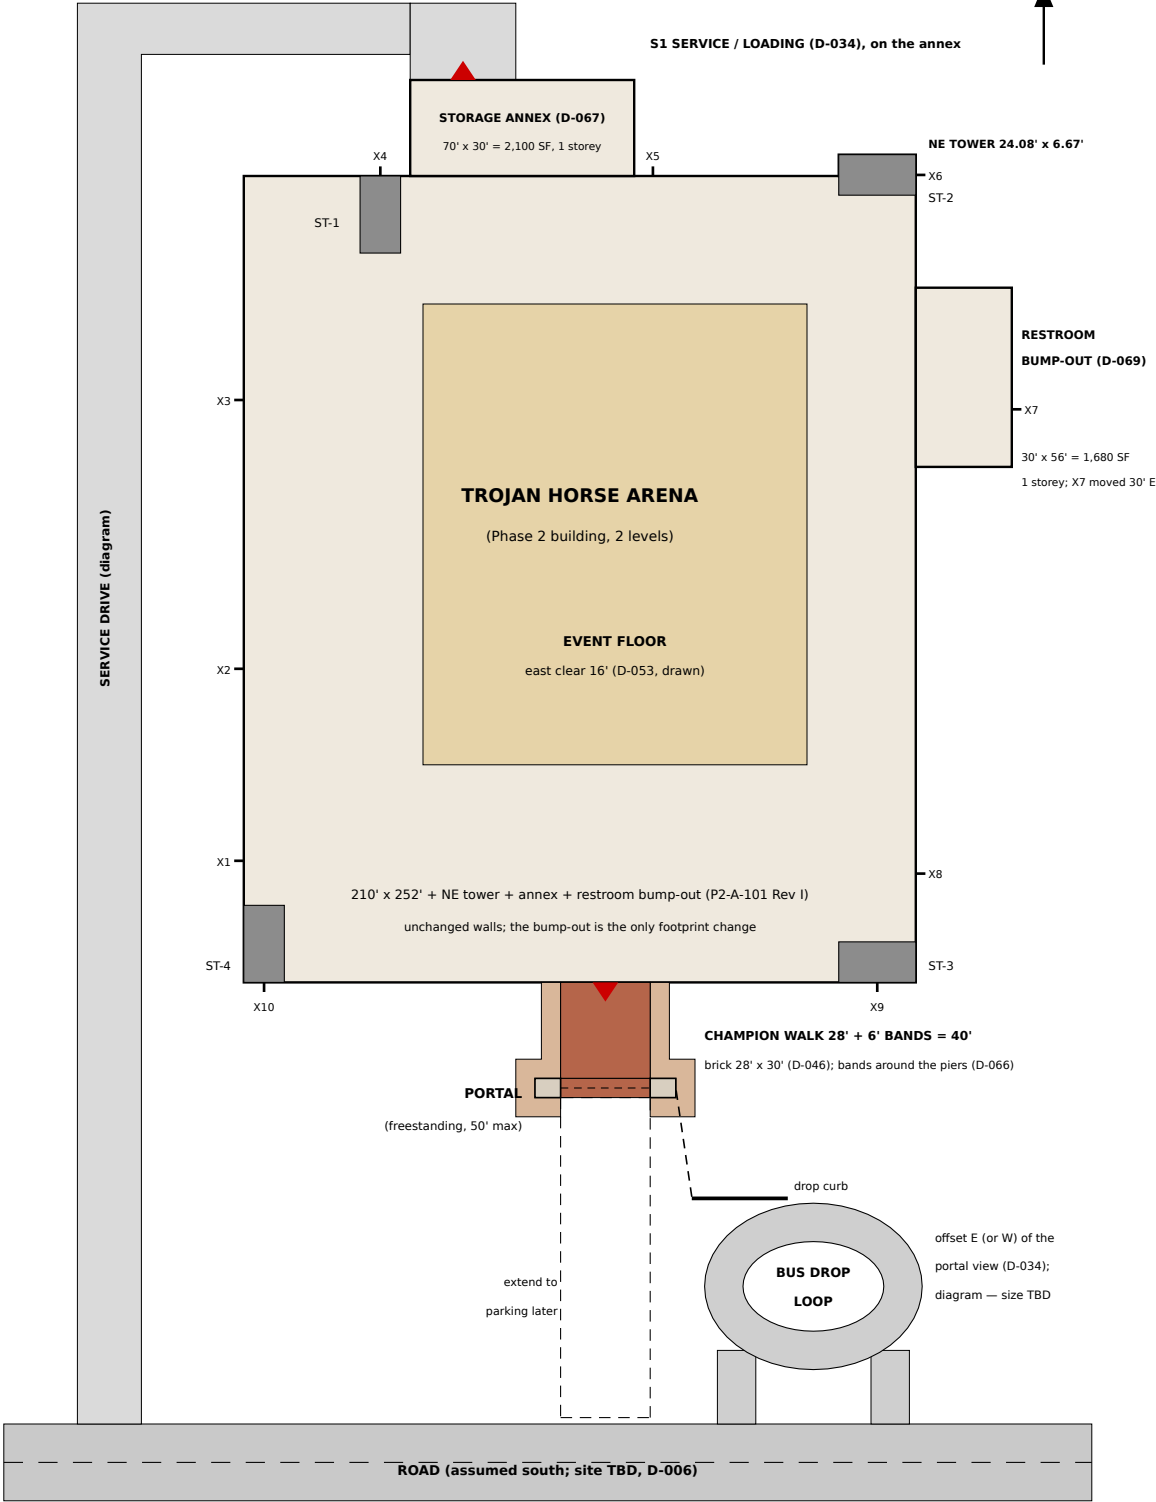

2 ENTRY — PORTAL + CHAMPION WALK — 1" = 30'

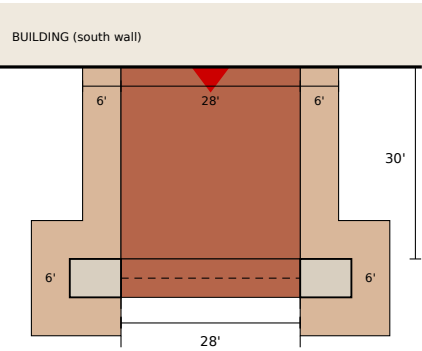

40' at the doors = 6 + 28 + 6 = 480 in ≥ 467.0 in (E1, standing margin)
bands pass outside both 8' piers: 6 + 28 + 6 = 40' at the portal (D-066)

LEGEND

- Building, P2-A-101 Rev I (210' + NE tower + annex + bump-out)
- Exit stairs 76" clear (D-052)
- Event floor
- Champion Walk (brick, 28')
- Walk bands 6' each side (D-066)
- Portal piers (limestone)
- Service drive / apron (diagram)
- Bus drop loop (diagram)
- Road (assumed)
- E1 main entry / S1 service door

SIZE — D-057 (no cap, no margin; D-056)

	DRAWN Rev I	REV H drawn	CHANGE	PROGRAM K	DRAWN — PROG.
L1 FOOTPRINT	56,860.6	55,180.6	+1,680.0	58,195.1	−1,334.5
L2 AREA	28,932.6	28,932.6	±0.0	28,186.3	+746.3
TOTAL GSF	85,793.1	84,113.1	+1,680.0	86,381.4	−588.2

Drawn = P2-A-101 Rev I / A-102 Rev F (L2 unchanged). Program = P2-G-003 Rev K: footprint = the larger of L1 gross and arena volume + L2, plus L2 gross; Rev K adds the core-2 restroom gross. The change is the one-storey restroom bump-out 30' x 56' = 1,680 SF (D-069). Size is set by budget and parcel (D-012, D-006).

STATUS

- SITE TBD (D-006): this is a layout diagram, not a site plan for permit. Parcel, property lines, setbacks, grading, parking count, utilities and stormwater are TBD. AHJ (R-006): Madison County Inspection Department if the parcel is unincorporated (Hazel Green is); the county states no zoning limits on construction; county codes 2018 IBC / IFC / NFPA 101; State Fire Marshal 2021 IFC.

ENTRY + EXIT DISCHARGE (D-066 DECIDED, Shane 1:22 PM CT)

- Freestanding limestone portal over the walk (D-043), 50' max (D-050), 44' wide x 6' deep with 8' piers and a 28' arch (ASSUMED), 30' south of the E1 doors (D-046). Champion Walk 28' x 30' brick (D-046) + a 6' band each side = 40' at the doors = 480 in ≥ 467.0 in (E1 at the standing margin, P2-G-002 Rev B; IBC 2021 1028.3). At the portal the bands pass outside both piers: 6 + 28 + 6 = 40'. Bands paved now, could be brick later (D-044). Band shape between doors and portal ASSUMED. Dashed: later extension to parking.

BUS + SERVICE (D-034 DECIDED defaults)

- South bus drop loop offset EAST so it does not block the portal view (west is equally allowed). Drop curb links to the walk's south end. Service / deliveries at S1, now on the storage annex's north wall (same x, 30' further north); the west-side drive and apron move north with it. Loop, drive and apron are diagrams: lane widths, turning templates and apron size TBD (civil).

BUILDING (AS DRAWN ON P2-A-101 REV I)


- 210' x 252' (unchanged) + NE stair tower + storage annex 70' x 30' on the north wall (D-067, unchanged) + restroom bump-out 30' x 56' on the east wall at V2 / EXIT (E), one storey (height ASSUMED, D-069). East is the open, public side; north stays the service yard (S1, apron, drive). X7 moves 30' east to the bump-out's east face; its discharge path to a public way is TBD with the parcel (D-006).

FIRE ACCESS / WATER (TBD)

- Fire apparatus access roads, hydrants and fire flow per IFC Appendices B, C, D (State Fire Marshal, 2021 IFC; D107 recommended) and the county's 2018 IFC. Exit discharge from X1-X10 to a public way (IBC 1028) TBD with the parcel.

1 SITE PLAN — CAMPUS DIAGRAM (SITE TBD)

1" = 60'-0" · north approximate · road assumed south · diagram only (no surveyed dimensions)



PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena · Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

SITE PLAN — CAMPUS DIAGRAM
SITE TBD · SCHEMATIC

SCALE

AS
NOTED

DATE

October
2026

REV

E

DRAWN BY

Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-C-101

SCHEMATIC — BLOCK PLAN

LEVEL 1 — OVERALL FLOOR PLAN (REV I)

scale 1" = 40'-0" on 17 x 11 in · north approximate, road assumed south, site TBD

LEGEND

- Lower tier, TELESCOPIC (extended, 6 rows x 24 in; 3.38 SF/seat) — D-009
- 42' wrestling mat (4, 2 x 2)
- 84' x 50' court + 10' runout (overlay)
- Portal / vomitory through the telescopic tier (V1, V2)
- X# = EXIT ONLY — alarmed, no exterior entry hardware (symbol; width not drawn)
- S1 = SERVICE / LOADING door (staff-controlled, not a people entrance; D-034)
- Upper tier above: front row 9.0' = 7'-6" clear, no low band (D-061)
- Security screening bay, 3 lanes ASSUMED (D-065 Option 1) · CD-1 controlled door
- Room block (tag number + drawn SF)
- Stair (4) / elevator (X), same position on both levels

ROOM SCHEDULE — LEVEL 1 (DRAWN vs PROGRAM side by side, P2-G-003 Rev K; C-3)

TAG	ROOM	DRAWN SF	PROGRAM	NOTE
—	Event floor + east zone (D-053)	17,280	17,264	120' x 144'; east tier 16 ft from mats
—	Lower tier, telescopic (1,100 seats)	4,896	3,719	6 rows; N 359 / S 347 / E 394
1	Boys Locker	3,507	3,500	
2	Girls Locker	3,507	3,503	drawn equal to boys (D-013)
3	Mech / Elec (NW)	1,017	1,063	
4	Men	700	700	lobby core: 14 fixtures (D-069 split)
5	Women	1,150	1,150	lobby core: 23 fixtures (D-069 split)
6	First Aid	120	120	Rev H: moved off the lobby's east side for the screening bay (D-065); east...
7	Vestibule	520	200	Rev G: widened to the 52 ft E1 bank (outer + inner bank, 8 pairs each, AS...
8	Concession	275	275	Rev H: moved off the lobby's east side for the screening bay (D-065) into t...
9	Equip. Storage	700	700	
10	Equip. Room	300	300	
11	Event Locker 1	900	900	to the tier line, full 3,600 (D-060): −0
12	Event Locker 2	900	900	to the tier line, full 3,600 (D-060): −0
13	Event Locker 3	900	900	to the tier line, full 3,600 (D-060): +0
14	Event Locker 4	900	900	to the tier line, full 3,600 (D-060): +0
15	Mech (N)	614	642	
16	Mech (E)	1,720	1,797	
22	Mech (NE)	530	554	NE pocket, up to ST-2 (Rev F: west edge with ST-2, D-061)
24	Chair / Table / Stage Storage	2,100	2,100	Rev H NEW (D-067): 2,100 SF one-storey annex; 56 chair / table trucks +...
23	Flex / Storage	975	—	FLEX, unprogrammed, label kept (D-039, C-1)
25	Men (2)	364	—	core 2: 5 WC + 7 urinals, 5 lav (D-069)
26	Women (2)	1,020	—	core 2: 24 WC, 7 lav (D-069)
27	Df / Jan.	56	—	core 2: 2 DF (hi-lo) + janitor sink (D-069)

AREA CHECK — D-057 (no SF cap, D-056)


	DRAWN REV I	REV H	CHANGE	PROGRAM G-003 K	DRAWN − PROG.
L1 FOOTPRINT	56,861	55,181	+1,680	58,195	−1,335
L2 AREA	28,933	28,933	±0	28,186	+746
TOTAL GSF	85,793	84,113	+1,680	86,381	−588

Floor 120 x 144, east tier 16 ft from the mats. Program = footprint / L2 gross (R-021). Seats N 673 / S 661 / E 866 (Rev F 673 / 661 / 866). Mech 3,881 vs 4,056. Event lockers 3,600 SF (D-060). FLEX kept: team assembly ≈ 2,072, FLEX / STORAGE 975 SF.

ACCESS CONTROL + EGRESS (D-033 DECIDED; layout ASSUMED)


- ONE WAY IN (D-033): E1 → vestibule → SCREENING BAY, lobby east side (D-065 Option 1; 3 lanes ASSUMED) → lobby. 39 ft = 468 in clear beside the bay ≥ 466.5 in standing (IBC 1003.6, 1010.5). First aid + concession in the E concourse.
- STORAGE ANNEX (D-067) 2,100 SF, north wall, S1 on it. RESTROOM BUMP-OUT (D-069 Option 2) 30 x 56 = 1,680 SF, one storey, east wall at V2 / EXIT (E): the 8 ft passage runs through it, X7 on its east face. Core 2 (rooms 25-27): men 5 WC + 7 urinals (IPC 424.2), 5 lav; women 24 WC, 7 lav; hi-lo DF + janitor. With the lobby core: 22 / 42 WC, 9 / 12 lav, 4 DF = chairs-only. Checks: A-111 C, A-401 C.
- D-061 (Option B): Level 2 at 17'-9", 21 in upper risers, front row 9.0 ft: 7'-6" clear under row 1 (≈ 1'-6" structure ASSUMED; IBC 1003.2 minimum, no margin). Exit paths under the tier are clear; no low band, no seats lost.

Sources: phase2.yaml (D-033-D-039, D-054, D-064-D-069); Shane 2026-10-04 1:21:1:22 + 3:31 PM CT; P2-G-003 K, A-111 C, A-401 C; IBC 2021 1003.6, 1030.2, T2902.1, 2902.3.3; IPC 2021 424.2 (R-009); ADA 2010 211.2, 213.3. Geometry: params/phase2_plan_rev_i.yaml.

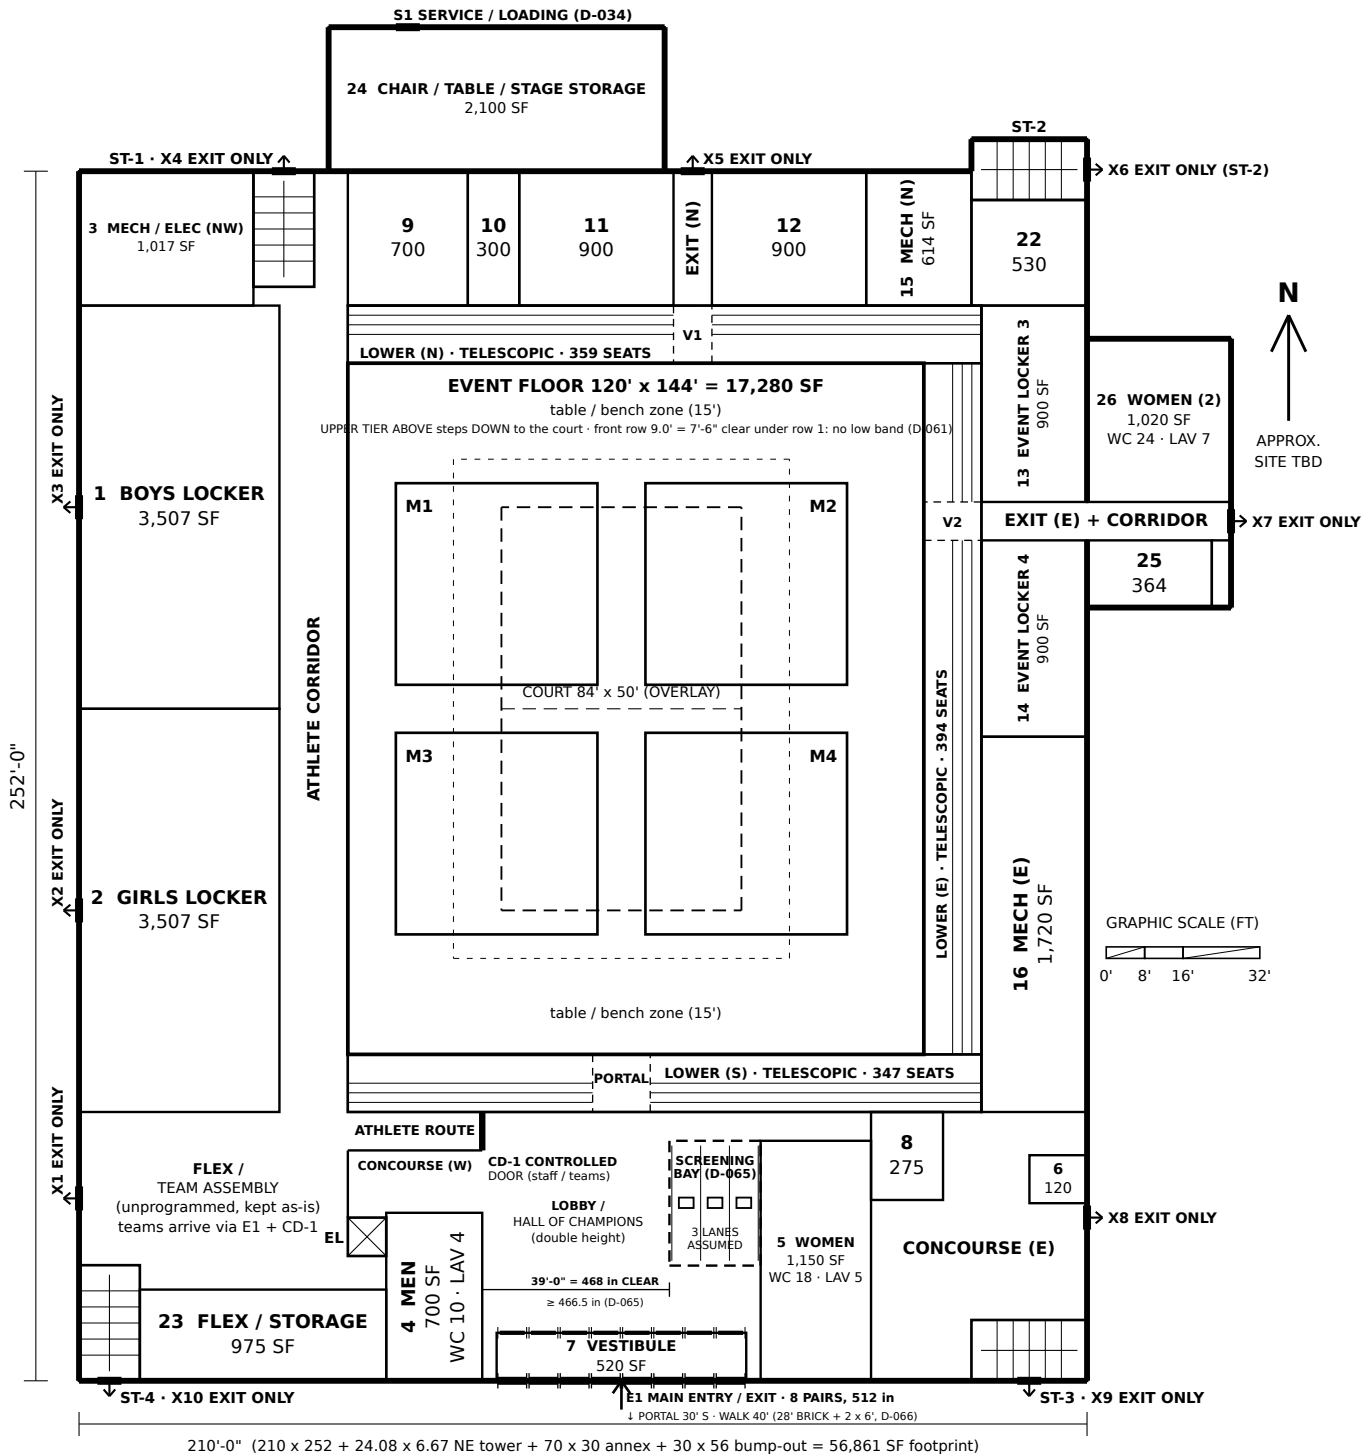

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	OVERALL FLOOR PLAN LEVEL 1 · BLOCK PLAN	1" = 40'-0"	October 2026	I	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-101

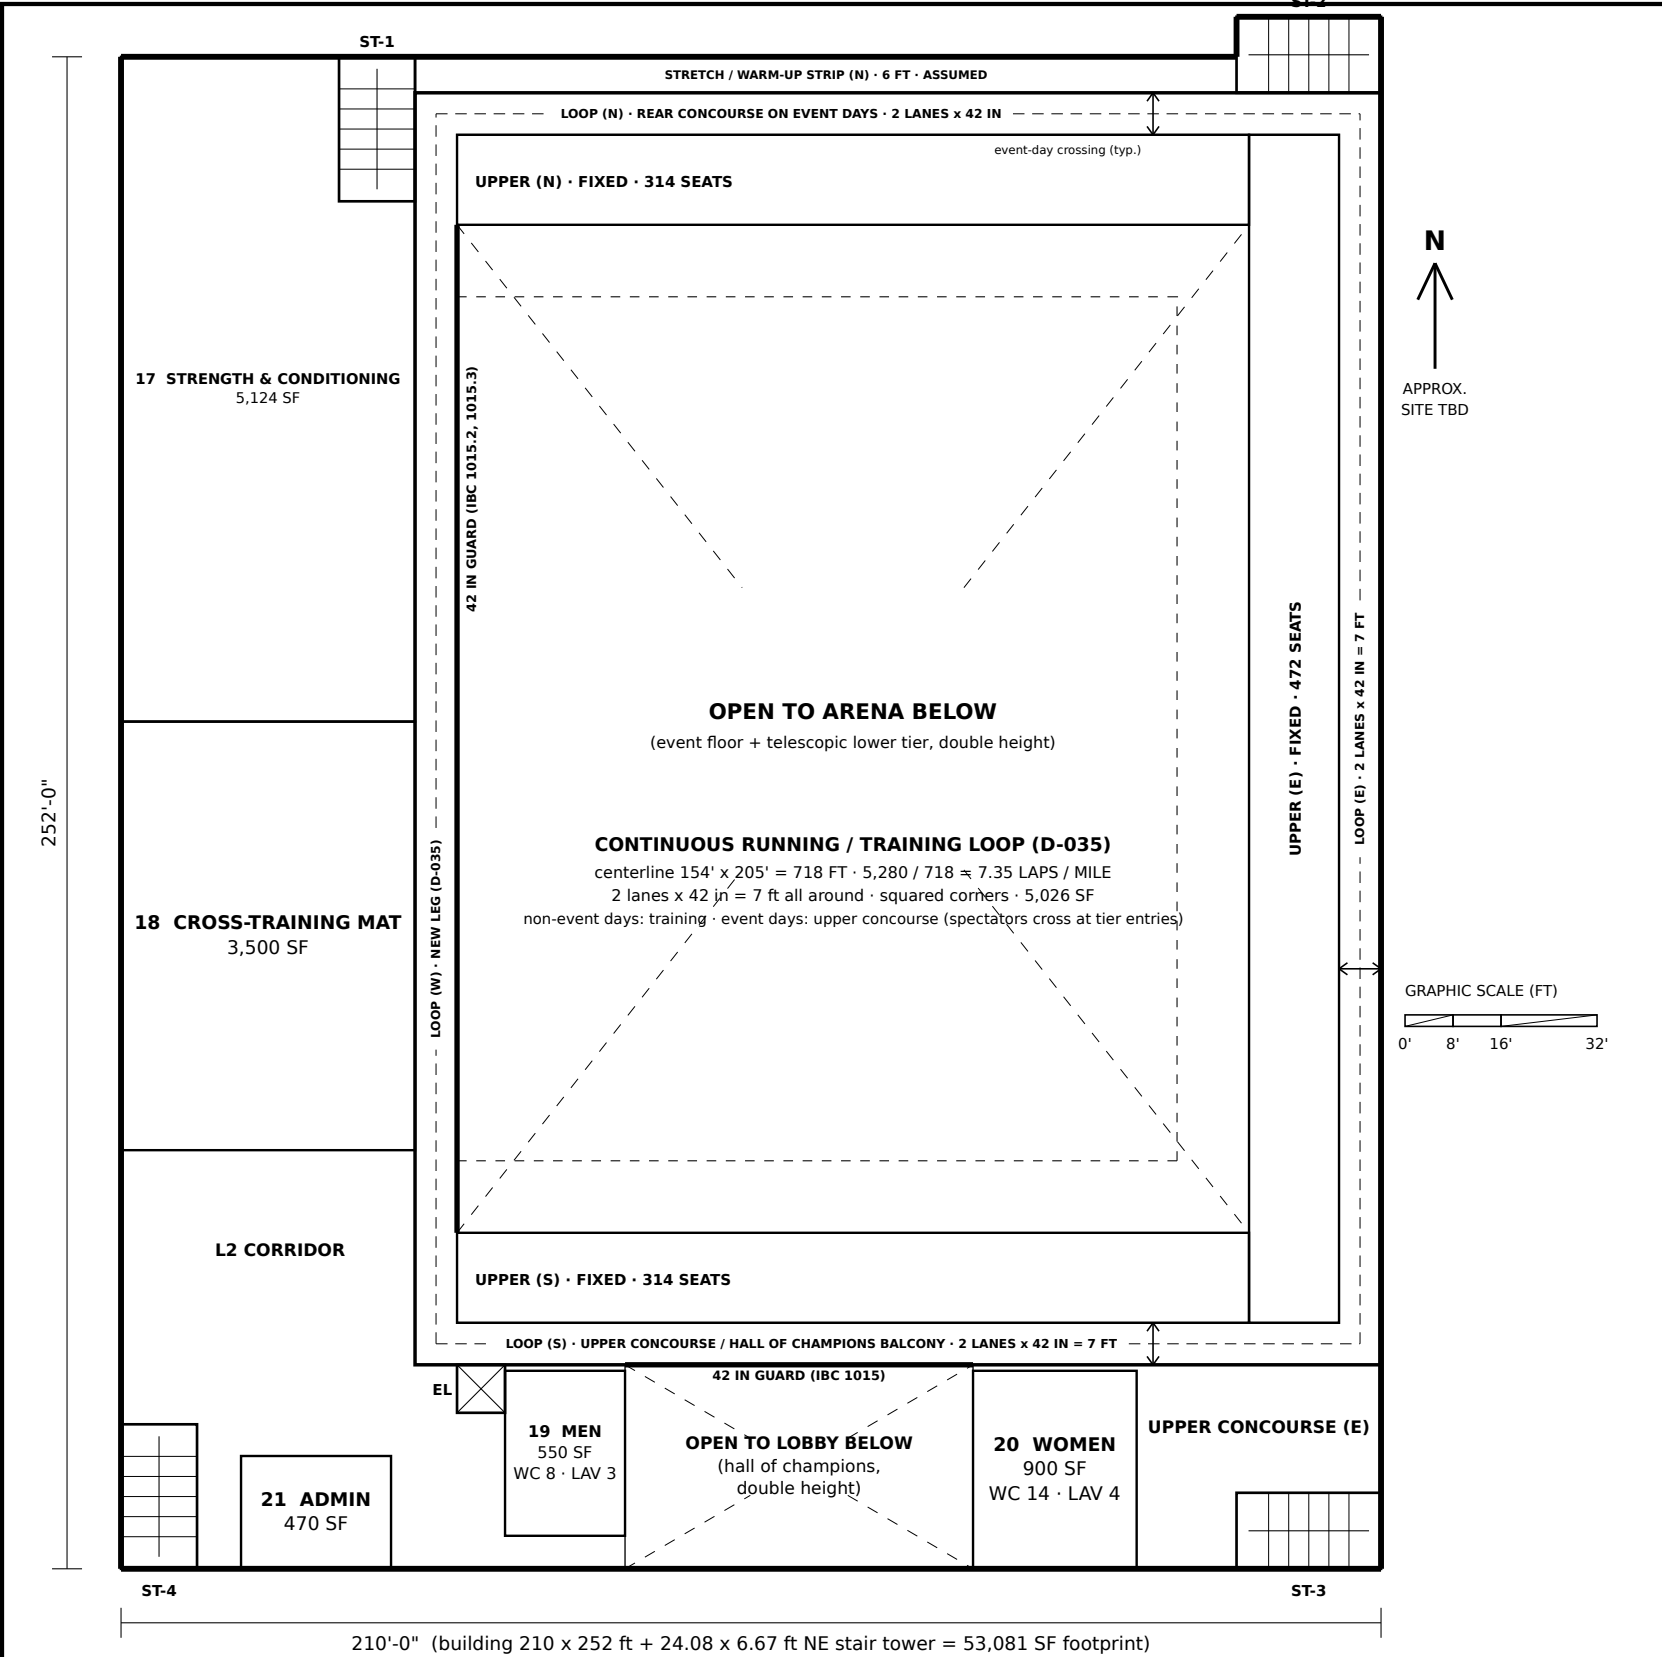

SCHEMATIC — BLOCK PLAN

LEVEL 2 — OVERALL FLOOR PLAN (REV F)

scale 1/32" = 1'-0" on 17 x 11 in · north approximate, road assumed south, site TBD

LEGEND

- Upper tier, FIXED (6.0 SF/seat) on the Level 2 deck — D-009
- Open to below (arena; lobby double height)
- Running / training loop, 2 lanes x 42 in (dashed = lane line) — D-035
- 42 in guard at an open edge (IBC 2021 1015.2, 1015.3)
- Room block (tag number + drawn SF)
- Stair (4) / elevator (X), same position on both levels

ROOM SCHEDULE — LEVEL 2 (DRAWN vs PROGRAM side by side, P2-G-003 Rev I; C-3)

TAG	ROOM	DRAWN SF	PROGRAM	NOTE
—	Upper tier, fixed (1,100 seats)	6,930	6,600	N 314 / S 314 / E 472
—	Running / training loop	5,026	5,026	2 x 42 in; 718 ft CL; 7.35 laps/mi
17	Strength & Conditioning	5,124	5,224	ST-1 (31 risers) inside: −100 vs program
18	Cross-Training Mat Area	3,500	3,500	trimmed 7 ft for the loop (D-035)
19	Men	550	550	11 fixtures (WC 8, LAV 3; urinals ≤ 5 of the WCs)
20	Women	900	900	18 fixtures (WC 14, LAV 4)
21	Admin	470	470	

AREA CHECK — D-057 (no SF cap, D-056)

	DRAWN REV F	REV E	CHANGE	PROGRAM G-003 I	DRAWN — PROG.
L1 FOOTPRINT	53,081	53,062	+18	54,415	−1,335
L2 AREA	28,933	28,914	+18	28,186	+746
TOTAL GSF	82,013	81,976	+37	82,601	−588

L2 = footprint minus open-to-below (arena 132 x 168, lobby 58 x 34). S&C 5,224 program vs 5,124 drawn: the 31-riser ST-1 takes 35 SF more than Rev E.

LEVEL 2 LOOP (D-035 DECIDED; geometry ASSUMED) + EGRESS

- LOOP (D-035, Shane 4:55 AM CT): continuous around the top of Level 2 — rear walkway (N), walkway (E), upper concourse / balcony (S) and a new west leg cut from S&C + cross-training. 2 lanes x 42 in = 7 ft everywhere, squared corners; 718 ft centerline = 7.35 laps/mile.
- Lane width: UFC 4-740-02N 4.1.7 (indoor track ≥ 12 ft, 3 lanes x 42 in); Athletic Business (3 lanes of 36-42 in; max 12 laps/mile, 8-10 preferred). 2 lanes ASSUMED (3 would need 10.5 ft; the upper tier would move).
- Event days the loop is the upper concourse: spectators cross it at the upper-tier entries (marked, locations ASSUMED) and at the stairs / elevator, which open onto it. Training on non-event days; crossing users are a known track hazard (Athletic Business).
- Guards 42 in min. where the loop is open more than 30 in above the floor below (IBC 2021 1015.2, 1015.3; 4 in sphere 1015.4): west edge over the arena, south edge over the lobby. Tier backs: rail / guard per 1030.17 (architect).
- Stairs 76 in, 31 risers of 6.87 in for the 17'-9" floor-to-floor (D-061), 76 in intermediate landings = 12.67 x 24.08 ft, same spot both levels. The NE stair tower grows 2.75 ft west to 24.08 x 6.67 ft (Rev E 21.33 x 6.67), still clear of the loop's north leg. Egress: 4 stairs discharge at L1 through EXIT ONLY doors X4, X6, X9, X10 (D-033).

LAYOUT NOTES (KEYSTONE, ASSUMED — architect to confirm)

- Upper tier 15 ft deep: 5 rows x 36 in, 21 in risers (D-061; section P2-A-301 / A-302), stepping DOWN from the loop (L2 FF 17'-9") to the court (D-049). Seat split by side unchanged, totals 1,100 + 1,100.
- 6 ft stretch strip on the N side. Exit separation, travel distance, structure NOT checked. Floor-to-floor 17'-9" (D-061 DECIDED).


Sources: phase2.yaml (D-009, D-030, D-033-D-035, D-049, D-051-D-053, D-056, D-057, D-060, D-061); Shane 2026-10-04 9:10 + 10:27 AM CT; P2-G-003 Rev I; R-008, R-009, R-014, R-015, R-020-R-022; IBC 2021 Ch. 10 (UpCodes, Alabama); UFC 4-740-02N (retrieved 2026-10-04). Geometry: params/phase2_plan_rev_f.yaml.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	OVERALL FLOOR PLAN LEVEL 2 · BLOCK PLAN	1/32" = 1'-0"	October 2026	F	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-102


(a) WRESTLING — 4 x 42' MATS, 2 x 2

1" = 50'-0" · tier open · NFHS clearances all PASS (table at right)

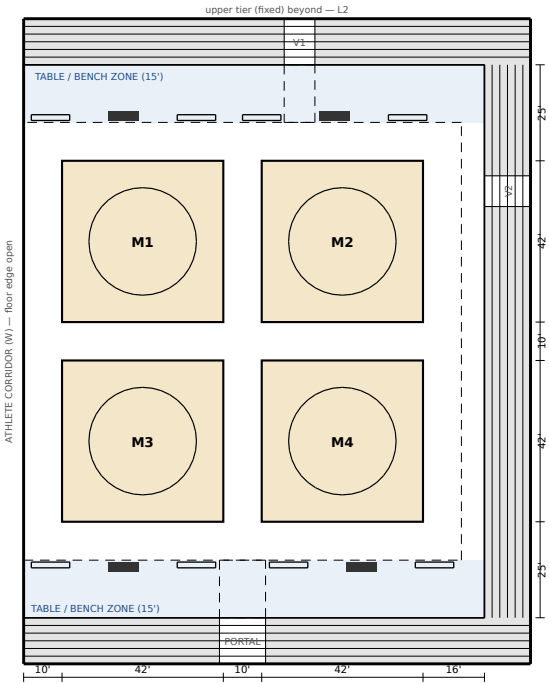


(c) TELESCOPIC LOWER TIER — OPEN vs CLOSED

1" = 50'-0" · 6 rows x 24 in = 12' open; 3'-6" closed (Hussey)

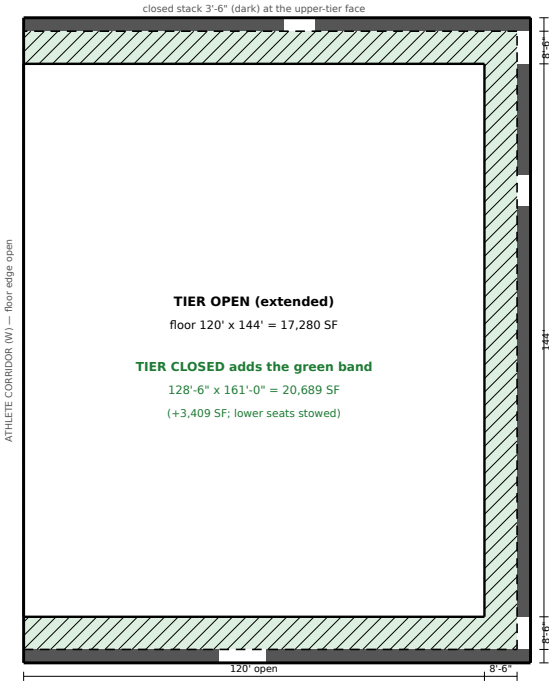


(b) BASKETBALL — 1 COURT (IN PARAMS)

1" = 50'-0" · tier open · mats up, court down, seats stay

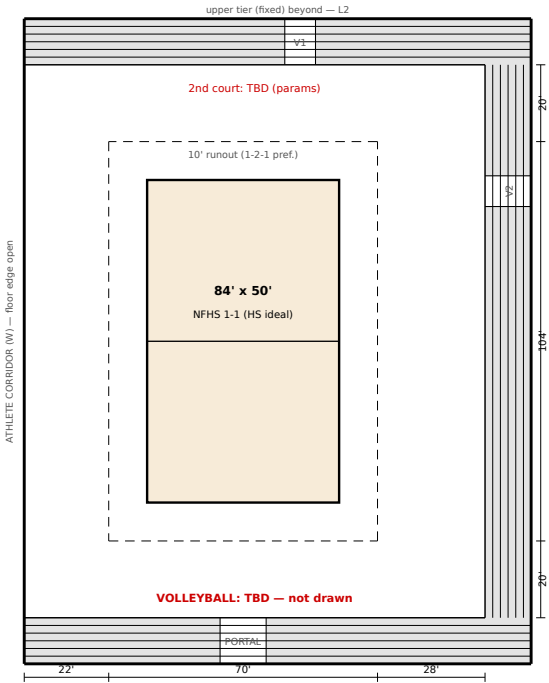

(d) EVENT-FLOOR CASES — P2-G-002 Rev B

1" = 100'-0" · hatched 114' x 144' = 16,416 SF · D-054 DECIDED: chairs = design

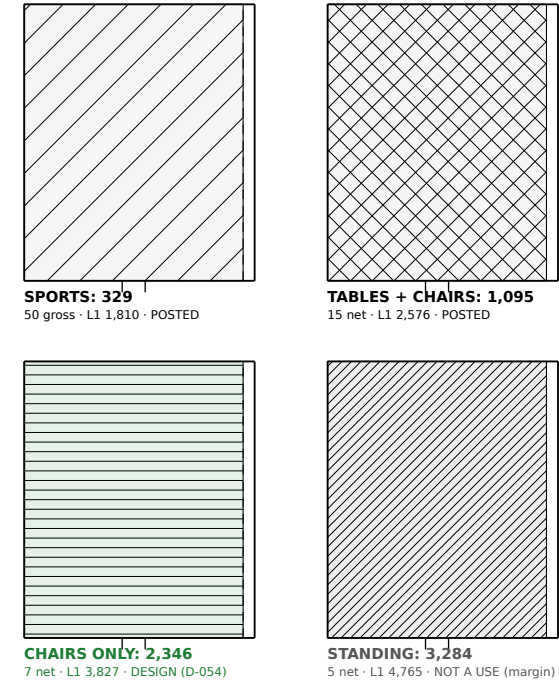

(a) WRESTLING — NFHS CLEARANCES ON THIS LAYOUT

RULE	ITEM	REQUIRED	DRAWN	
NFHS 2-1-2	Circle + safety area	$\geq 28 + 2 \times 5 = 38$ ft	42 ft mat (7 ft each side of a 28 ft circle)	PASS
NFHS 2-1-5	Space around each mat	≥ 10 ft	W 10 · between 10 / 10 · E 16 · S / N 25 / 25	PASS
NFHS 2-3	Scorer's table to mat	≥ 10 ft	10.5 ft	PASS
NFHS 2-1-5	Bench to mat / to table	≥ 10 / ≥ 10 ft	10.5 / 10 ft	PASS
KHSAA (rec.)	Circle to walls / tier	about 10 ft	W 17 (open to corridor) · E 23 · S / N 32 / 32	PASS

Tables 8' x 2.5' and benches 10' x 1.5' ASSUMED (no size in NFHS text found), front edge 10.5' from the mat. Portal and V1 aisles kept clear (egress, P2-A-111). Tournaments: up to two team personnel in chairs at the mat edge (NFHS 2-2-2); dual meets can use one mat (R-005.5). Rule text: NFHS 2014-15 (R-005); current book UNVERIFIED. 28' circle drawn = NFHS minimum (42' mats are often sold with a 32' circle).

(b) BASKETBALL / VOLLEYBALL — FROM PARAMS ONLY

1 court (phase2.yaml basketball_full_courts: 1): 84' x 50' (NFHS 1-1) + 10' runout (1-2-1: $\geq 3'$, 10' preferred) = 70' x 104'; to the floor edge W 22' / E 28' / S 20' / N 20'. Clear height $\geq 25'$ (R-019). Boundary + division line only (other markings not drawn: not researched); team benches / scorer's table for basketball: TBD (not in params or decisions). VOLLEYBALL: TBD — phase2.yaml volleyball_courts: TBD; R-012 volleyball not researched. Nothing drawn (no new program). 2nd basketball court: TBD (phase2.yaml basketball_second_court: TBD; 'only after clear span is measured').

(c) TELESCOPIC LOWER TIER — FLOOR ZONES

STATE	FLOOR ZONE	SF	LOWER SEATS
Open — extended 12' (6 x 24 in)	120' x 144'	17,280	1,100
Closed — 3'-6" stack	128'-6" x 161'-0"	20,689	0
Gain (N, S, E)	+8'-6" each side	+3,409	


Stack closes against the upper-tier face line (N y = 224, S y = 56, E x = 188): P2-A-302 Rev C keeps the stack in front of the upper-tier face, not recessed (open rows 5-6 would sit under < 7'-6"). Each side (N, S, E) operates on its own (ASSUMED; banks and motorization TBD, manufacturer). Folding and telescopic seating that is not a building element: ICC 300 (IBC 2021 1030.1.1). Spaces under bleachers: 1-hour separation unless an exception applies (1030.1.1.1) — architect. Portal, V1, V2 stay open through the stack.

CONVERSIONS + STORAGE (ASSUMED SEQUENCE)

- Wrestling: tier open; mats roll in from EQUIP. STORAGE at the top of the athlete corridor (plan Rev H, unchanged).
- Basketball: mats up and stored, court surface down (surface type TBD); seats stay (phase2.yaml floor_converts).
- Floor events: chairs, tables and stage carts come from the new Chair / Table / Stage Storage annex (2,100 SF, D-067) — route below. Tier open or closed per event.
- Post the occupant load for each configuration near the main exit (IBC 2021 1004.9): sports, tables, chairs (design). Standing is not posted.

STORAGE → FLOOR

D-067 · 1" = 150' · route ASSUMED

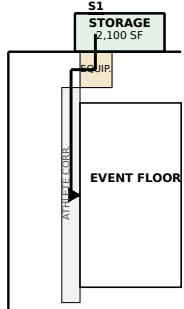

Chairs / tables / stage carts: annex → EQUIP. STORAGE → athlete corridor → floor (west edge open); deliveries via S1 on the annex north wall (D-034). Route ASSUMED; door sizes for 67 x 33.25 in trucks: architect.

Annex 70' x 30', one storey, north wall between X4 and X5; S1 moved to its north wall (y 282). Sized for 56 chair / table trucks (42 chairs + 8-10 tables each) + stage carts (D-067, aisle factor ASSUMED).

Screening bay (D-065) is in the lobby, outside these views: P2-A-101 Rev H / P2-A-111 Rev B.

Schematic overlays for the owner, the architect of record and the AHJ. Not a code review and no statement of approval (D-008). Sports rules quoted from older NFHS editions (current books paywalled): UNVERIFIED against the current edition. Furniture positions ASSUMED.

(d) EVENT-FLOOR CASES — POSTED LOADS (1004.9)

CASE	FACTOR	FLOOR	L1	LAYOUT NOTE
Sports	50 gross	329	1,810	POST the sports load. Mats (a) or court (b); tier open. Exercise 50 gross ASSUMED (AHJ assigns).
Tables + Chairs	15 net	1,095	2,576	POST. Aisles measured 19 in from the table edge (1030.13.1); level aisles 42 / 36 in (1030.9.1). Layout TBD.
Chairs Only	7 net	2,346	3,827	POST — DESIGN CASE (D-054). Rows: ≥ 12 in clear up to 14 seats, + 0.3 in per seat beyond, ≤ 100 per row, aisles both ends (1030.13.2). Row plan TBD.
Standing	5 net	3,284	4,765	NOT A USE: no standing-floor events (D-054). Kept only as exit margin: L1 exits stay as drawn (E1 467.0 in vs 468 in clear).

Floor = 16,416 SF (G-002 Rev B, 114' x 144'; the east 6' strip, D-053, unhatched); L1 = floor + 1,100 lower seats + 381 other L1 rooms (incl. the storage annex, 300 gross). Design case = chairs: L1 3,827. Tier CLOSED, chairs: 2,956 on 20,689 SF with no lower seats → L1 3,337, below the design case; restroom load 2,956 < 3,446 (net = gross ASSUMED). Whole drawn zone standing (17,280 SF = 3,456) would need E1 479.9 in vs 468 in clear beside the screening bay: not permitted (standing is not a use).

DECISIONS — SHANE 1:21 / 1:22 PM CT

- D-054 DECIDED: chairs-only floor (7 net -> 2,346) is the design case; exits stay as drawn for standing (margin).
- D-064 DECIDED: restrooms sized to chairs-only; posted loads; temporary units above that.
- D-065 DECIDED: screening in a side bay of the lobby, 468 in clear kept beside it (P2-A-101 Rev H, P2-A-111 Rev B; outside these views).
- D-066 DECIDED: 40 ft walk at the doors (28 ft brick + 6 ft bands), flows around both portal piers (P2-C-101 Rev D).
- D-067 DECIDED: 2,100 SF chair / table / stage storage annex at the north wall, S1 on it (route: STORAGE → FLOOR on this sheet).
- D-069 OPEN: where the chairs-only restroom space comes from (P2-A-401 Rev B test-fit).


LEGEND

Grey band = telescopic lower tier open (thin lines = 24 in rows) · dark band = closed stack · tan = mat (circle = 28' NFHS minimum) · black bar = scorer's table · open bar = team bench · blue = table / bench zone · dashed = 10' mat area / keep-clear aisle / runout · green hatch = floor gained when closed · (d): green = design case, grey = not a use · route: green = storage annex, tan = equipment storage, line = cart route.

Sources: params/phase2_overlays.yaml, phase2_overlays_rev_b.yaml; phase2_plan_rev_h.yaml; phase2_code_rev_b.yaml; R-005 (NFHS Wrestling 2-1-2, 2-1-5, 2-2-1, 2-2-2, 2-3; KHSAA); R-012 (NFHS Basketball 1-1, 1-2-1); R-019; R-008 / Hussey MAXAM; R-007.2 (IBC 2021 T1004.5); IBC 2021 1004.9, 1030.1.1, 1030.9.1, 1030.13.1, 1030.13.2 (UpCodes, retrieved 2026-10-04); P2-G-002 Rev B; P2-A-111 Rev B; D-053, D-054, D-064 to D-069; Shane 2026-10-04 1:21 / 1:22 PM CT.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	FLOOR OVERLAYS MATS, SEATING + CONVERSIONS	AS NOTED	October 2026	B	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-103

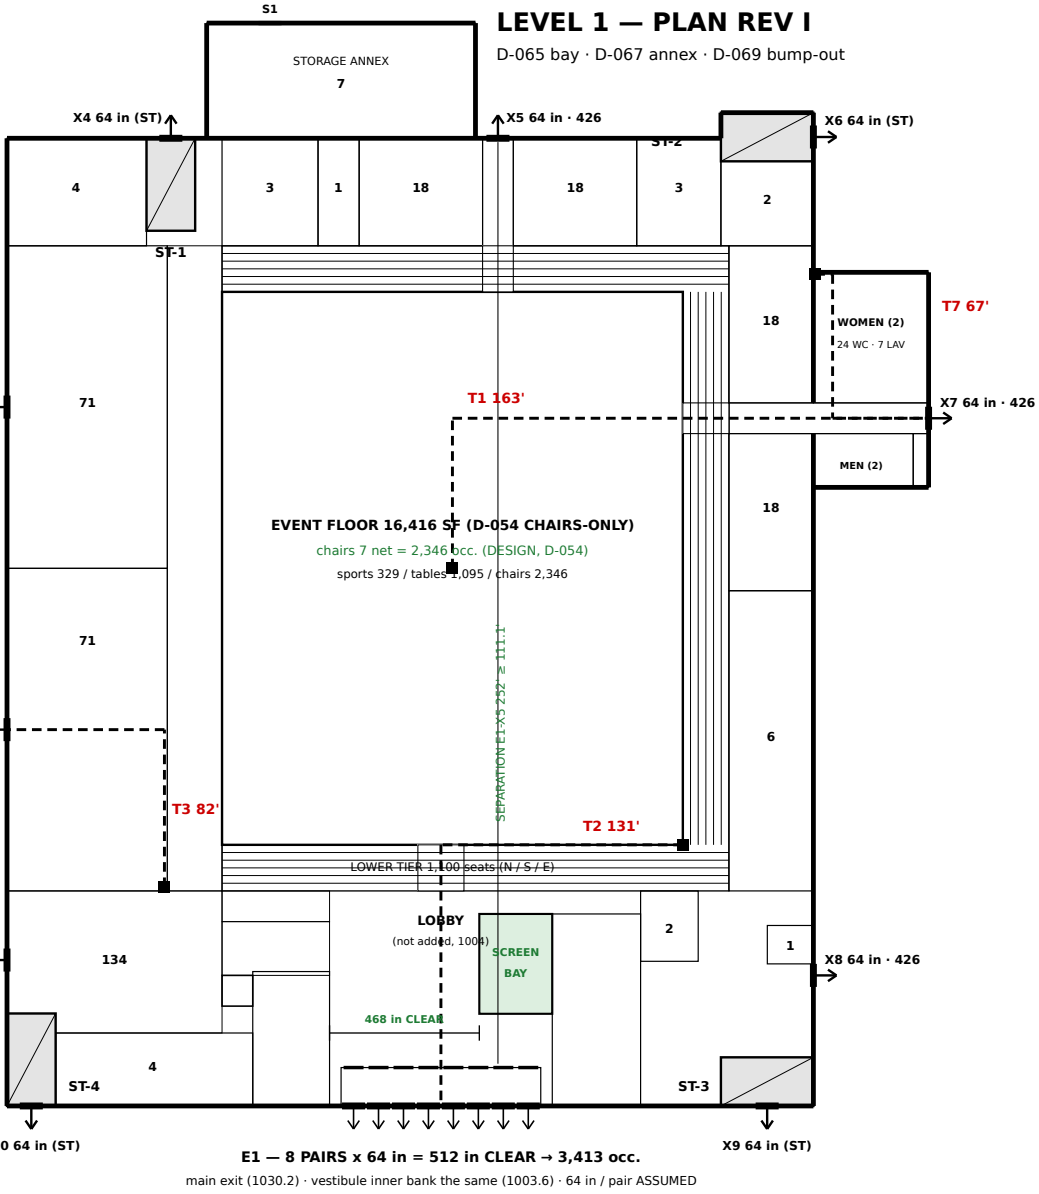

L1 EXITS — CAPACITY (0.15 in / occ., 1005.3.2 exc.)


EXIT / CHECK	CLEAR in	CAPACITY	SERVES / RESULT
E1 main (bank)	512	3,413	lobby, portal, south tier, concourses
X1, X2, X3, X5, X7, X8	6 x 64 = 384	426 each	exit-only doors (64 in pair ASSUMED)
X4, X6, X9, X10	4 x 64 = 256	4 x 9.2 in left	stair discharge: L2 uses 54.8 in each
Total, building worst 5,289	need 793.4	have 1,152.0	PASS
Main exit ≥ 1/2 (1030.2)	need 396.7	have 512.0	PASS
Other L1 exits ≥ 1/2 of L1 3,827 (1030.3)	need 287.0	have 420.7	PASS
Lose E1, ≥ 50 % (1005.5)	need 396.7	have 640.0	PASS
Standing margin 6,227: E1 (exits as drawn)	need 467.0	have 512.0	PASS
Lobby beside the screening bay (1003.6)	need 467.0	have 468.0	PASS

TBD

- Door widths, hardware and the 10 ft open space / street frontage at E1 (1030.2): architect. Seating aisles, rails, smoke-protected seating (1030.6.2): TBD. Structure 1'-6" ASSUMED (zero margin at 7'-6").

LEVEL 2 — LIFE SAFETY (PLAN REV F, UNCHANGED)

1" = 50'-0" · 4 stairs 76 in (D-052) = the L2 exits · loop = upper concourse on event days

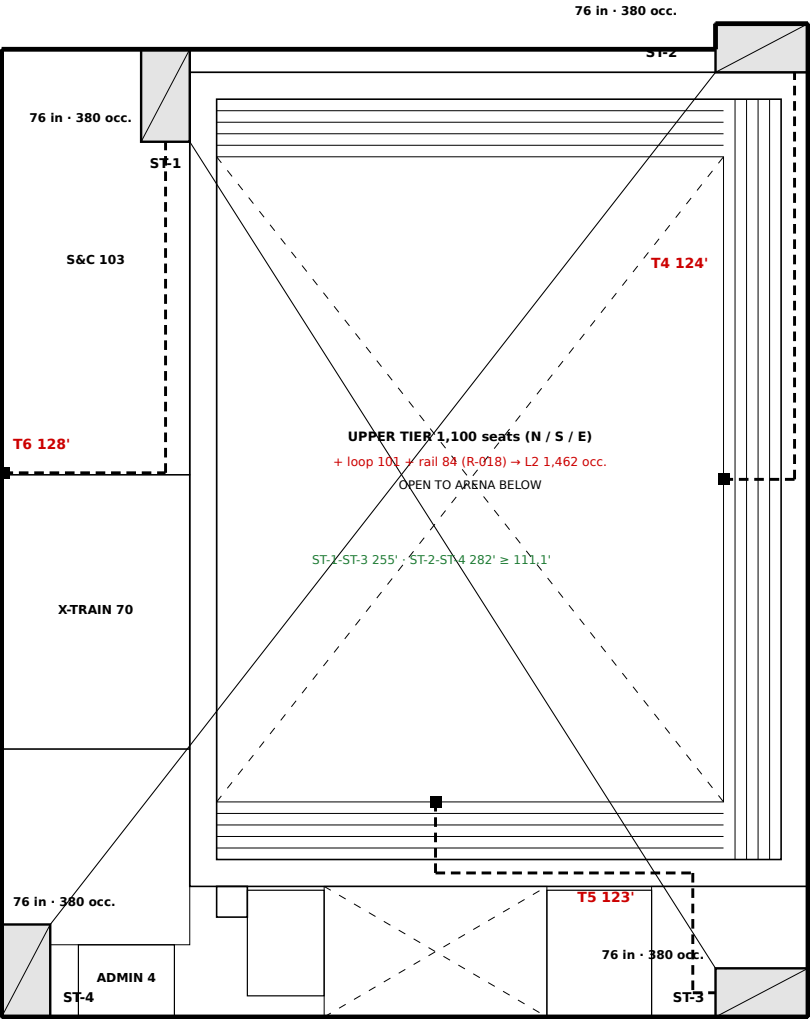

L2 EXITS — STAIRS (0.2 in / occ., 1005.3.1 exc. 1)

EXIT / CHECK	CLEAR in	CAPACITY	SERVES / RESULT
ST-1 ... ST-4	4 x 76 = 304	380 each	one per corner, discharge X4 / X6 / X9 / X10
Total, L2 worst 1,462	need 292.4	have 304.0	PASS (+11.6)
Lose one stair, ≥ 50 % (1005.5)	need 146.2	have 228.0	PASS (+81.8)
Loop at the worst corner (R-018.3, 0.2)	need 78.6	have 84.0	PASS (+5.4)
4 exits from L2 (T1006.3.3, > 1,000)		4 stairs	PASS

EXIT (E) THROUGH THE BUMP-OUT (D-069) — CHECK

EXIT (E) runs 30 ft on through the bump-out to X7: 8 ft = 96 in ≥ 44 in corridor (T1020.3) and the 64 in X7 pair; restroom doors and the DF alcove open off it, no queuing in it (1003.6). T1 163 ft ≤ 250. X7 discharges east: path to a public way TBD (1028, D-006; C-101 Rev E).

Sources: P2-G-002 Rev B; P2-A-101 Rev I / A-102 Rev F (params/phase2_plan_rev_i.yaml); params/phase2_life_safety_rev_c.yaml; IBC 2021 1003.6, 1006.2.1, 1007.1, 1017.2-3, T1020.3, 1028, 1030.2-3, 2902.3.3; Shane 1:21-1:22 + 3:31 PM CT.

Schematic life safety diagram for the architect of record and the AHJ. Not a code review and no statement of approval; every line needs architect + AHJ confirmation (D-008). Door widths ASSUMED, travel paths measured on the diagram.

LEGEND

Heavy bar + arrow = exit door (clear in · occupants); E1 = 8 pair bars, outer + inner (vestibule) bank. Grey box = stair. Red dashed + dot = travel path (dot = remote point; feet, rectilinear). Green line = exit separation. Green zone = screening bay (D-065). Numbers in rooms = occupant load (P2-G-002).

OCCUPANT LOADS (P2-G-002 REV B, IBC T1004.5)

CASE	FLOOR	L1	BLDG	E1 NEED
Sports (50 gross)	329	1,810	3,272	245.4
Tables + chairs (15 net)	1,095	2,576	4,038	302.8
Chairs only (7 net)	2,346	3,827	5,289	396.7
Standing (5 net) (WORST)	3,284	4,765	6,227	467.0
Whole floor zone 17,280 SF standing	2,469	3,950	5,412	405.9

L1 without the floor 1,481 (seats 1,100); L2 1,277 base, 1,462 worst. All cases pass with the 512 in bank; the whole-floor sensitivity still passes (E1 405.9 ≤ 512 in, total 811.8 ≤ 1,152 in).

EXIT SEPARATION (1007.1.1 exc. 2, sprinklered)

- Max overall diagonal 333.2 ft (SW corner to NE stair tower) → 1/3 = 111.1 ft (1/2 = 166.6 ft unsprinklered). Measured to any point of a doorway / closest riser (1007.1.1.1). All outline corners checked: bump-out NE 323.6 ft, annex NE 307.3 ft (shorter).
- L1 E1 → X5: 252.0 ft ≥ 111.1 ft — PASS. E1 measured at the point of the bank (x 87.25-138.75) in line with X5.
 - L2 ST-1 → ST-3: 255.1 ft ≥ 111.1 ft — PASS. nearest corners of the stair rectangles (risers lie inside, so the riser distance is not shorter).
 - L2 ST-2 → ST-4: 281.5 ft ≥ 111.1 ft — PASS. nearest corners of the stair rectangles.
 - Other exits a reasonable distance apart (1007.1.2): one stair per corner, exits on all four walls.

TRAVEL DISTANCE (Table 1017.2: 250 FT)

- IBC 2021 Table 1017.2: Group A with sprinklers (903.3.1.1) 250 ft. 1017.3: from the most remote point along the natural and unobstructed path to the entrance to the nearest exit. Paths below are rectilinear along open floor on the diagram (walls / doors / aisles not drawn): UNVERIFIED.
- T1 L1 event floor center → V2 → EXIT (E) + corridor → X7 (moved 30 ft east): 163 ft — ≤ 250, PASS (UNVERIFIED)
 - T2 L1 floor SE corner → portal → lobby → E1: 131 ft — ≤ 250, PASS (UNVERIFIED)
 - T3 L1 girls locker far corner → X2: 82 ft — ≤ 250, PASS (UNVERIFIED)
 - T4 L2 E upper tier, front row mid → aisle → loop → ST-2: 124 ft — ≤ 250, PASS (UNVERIFIED)
 - T5 L2 S upper tier, front row mid → loop → upper concourse (E) → ST-3: 123 ft — ≤ 250, PASS (UNVERIFIED)
 - T6 L2 S&C far corner → ST-1: 128 ft — ≤ 250, PASS (UNVERIFIED)
 - T7 L1 women's room (2) far corner → corridor → X7: 67 ft — ≤ 250, PASS (UNVERIFIED)
- L2 paths end at the stair. If the stairs are open exit access stairways rather than enclosed exit stairways (TBD, architect), travel continues down the stair (1017.3.1, along the nosings) to the L1 exit door: about +50 ft ASSUMED (2 flights + 76 in landings + 5 ft to the door) — still under 250 ft.

COMMON PATH (T1006.2.1, 1030.8)

- Restroom core 2 (D-069) (accessory): one entry each, off the corridor: women far corner → door 38 ft, men 34 ft (≤ 75), then two ways: W to V2 / floor, E to X7 — OK as planned (doors ASSUMED, UNVERIFIED).
- Storage annex (D-067) (7): ≤ 49 and 70 x 30 ft: S1 + the door to equipment storage = 2 ways out; farthest point ≤ 75 ft to either — OK as planned (doors ASSUMED).
- Event lockers 1-4 (18 each): one door OK if ≤ 75 ft: room 32 x 28 / 22 x 41 ft → ≤ 63 ft rectilinear to any wall point — LIKELY — door not located (UNVERIFIED).
- Boys / girls locker (71 each): > 49 → 2 exits: X2 / X3 + corridor door — OK as planned (corridor door ASSUMED).
- Flex / team assembly (134): > 49 → 2 exits: X1 + lobby side (CD-1 free egress, 1010.2) — OK as planned.
- S&C / cross-training (L2) (103 / 70): > 49 → 2 exit access doorways each (ST-1 / loop; corridor / loop) — ASSUMED doors (TBD).
- Seats (both tiers) (1,100 + 1,100): 30 ft to a choice of two paths: aisle 12-15 ft to the floor / loop, then two ways — TBD — aisles and row lengths not drawn.

Rules: one exit only if ≤ 49 occ. and ≤ 75 ft (T1006.2.1, Group A, sprinklered); seats 30 ft to a choice of two paths (1030.8); unoccupied mech rooms exempt (1006.2.1 exc. 3).

SCREENING BAY vs EGRESS (D-065 DECIDED) — CHECK

- Bay x 123-142, y 24-50 (19 x 26 ft); lobby clear beside it 39 ft = 468 in, free of lanes, stanchions and queues; 14 ft cross aisle to the inner bank. Main exit need: chairs 396.7 in (design), standing 467.0 in (margin): both ≤ 468, PASS.
- Lanes, tables, queues and control lines stay out of the 468 in path (IBC 1003.6, 1010.5). Standing is not a design use (D-054, posted loads 1004.9): whole-floor standing would need 479.9 in here.

RESTROOMS — CORE 2 BUMP-OUT (D-069 DECIDED, OPTION 2)

D-069 DECIDED Option 2 (Shane 3:31 PM CT): core 2 in a one-storey 30 x 56 ft bump-out on the east wall at V2 / EXIT (E). Lobby core 10 / 18 WC, 4 / 5 lav, 2 DF + core 2 men 5 WC + 7 urinals (≤ 67 %, IPC 424.2), 5 lav; women 24 WC, 7 lav; 2 DF = 22 / 42, 9 / 12, 4 = chairs-only 3,446 (T2902.1): PASS. Within one storey and 500 ft (2902.3.3): PASS.





- Floor chair layouts must keep an aisle to V2: core 2 is reached only through V2 / EXIT (E) (next A-103 rev).

EXIT DISCHARGE — 40 FT WALK (D-066 DECIDED) — CHECK

Exit discharge (1028.3, D-066 DECIDED): walk 40 ft at the doors = 28 ft brick + 2 x 6 ft bands = 480 in ≥ 466.5 (standing margin 467.0); at the portal the bands pass outside both 8 ft piers (6 ft each) -> 28 + 6 + 6 = 40 ft = 480 in; south to the public way 40 ft (site TBD, D-006). P2-C-101 Rev D.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	LIFE SAFETY PLAN LEVELS 1 + 2 · SCHEMATIC	1" = 50'-0"	October 2026	C	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-111

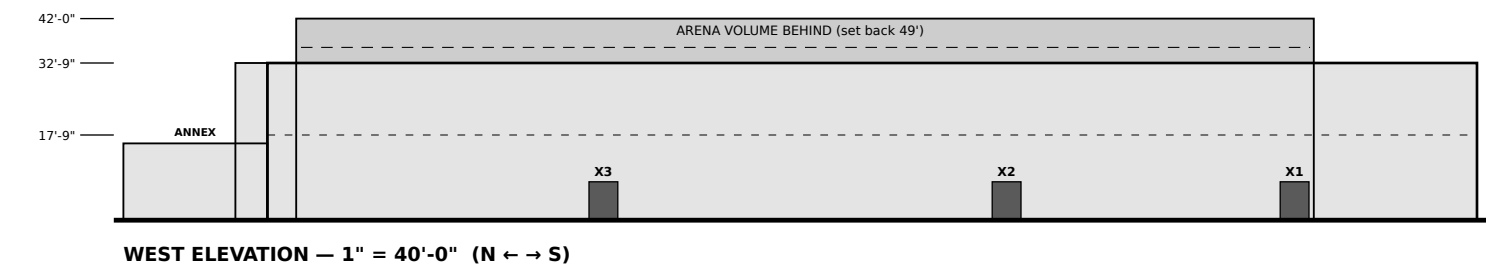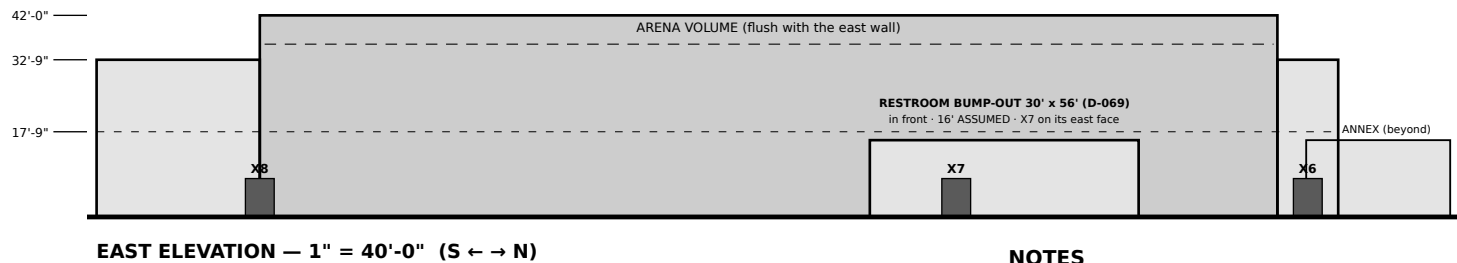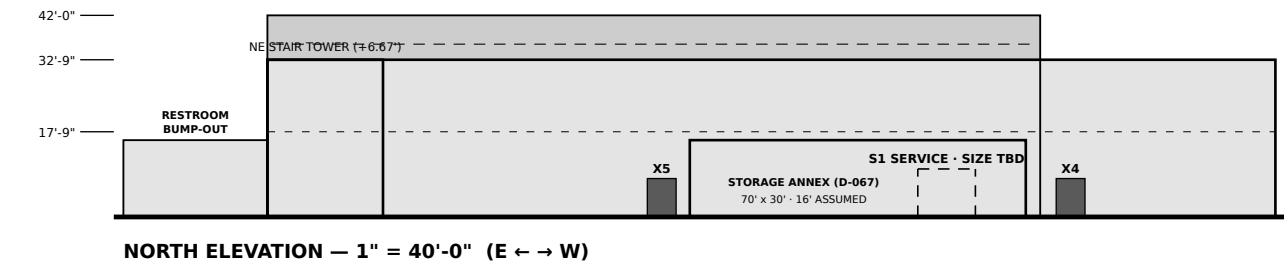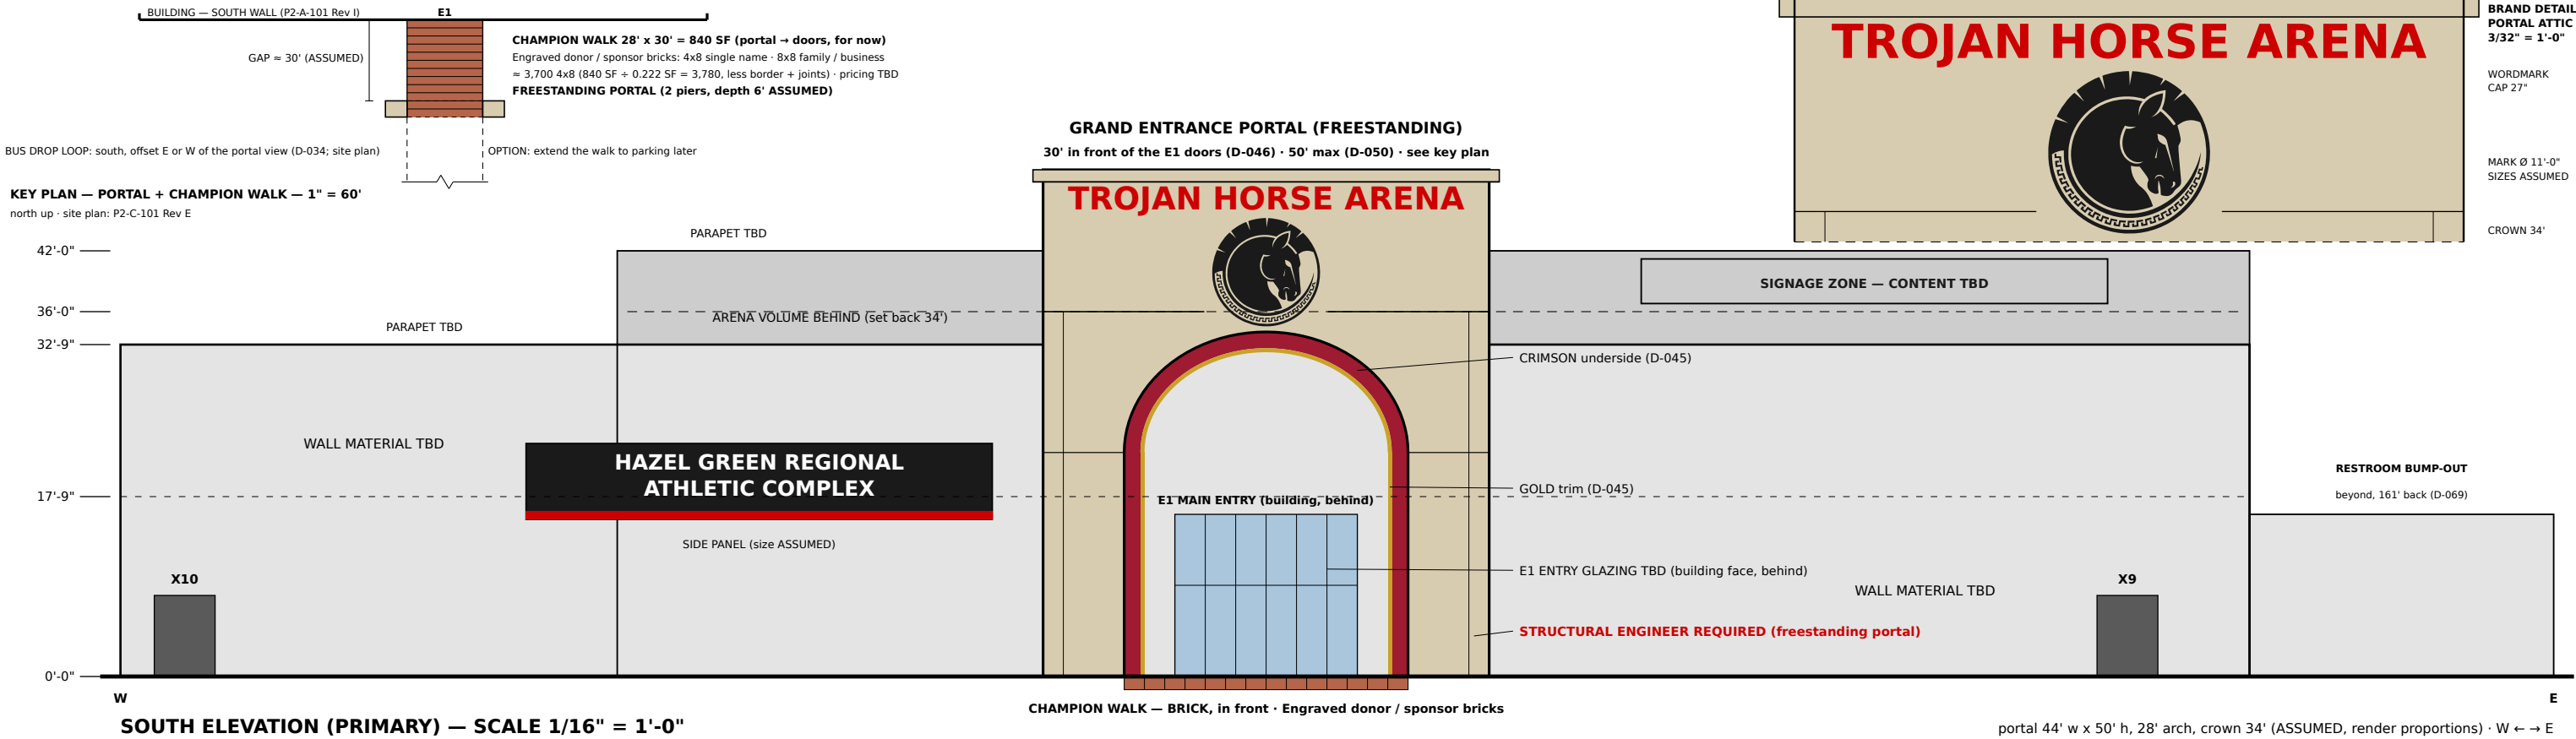

FINISHES


- LIMESTONE (portal) — Shane (material)
- CRIMSON (inside the arch) — Shane (color)
- GOLD (arch soffit) — Shane (color)
- BRAND RED — Shane (red/black brand)
- BRAND BLACK — as brand red
- WALL MATERIAL TBD — TBD
- ARENA VOLUME — WALL / ROOF TBD — TBD
- ENTRY GLAZING (TBD) — TBD
- BRICK (Champion Walk) — Shane (material)

NOTES

- HEIGHTS: L2 FF 17'-9" (D-061 DECIDED), ring roof 32.75' (L2 + 15') ASSUMED. Arena clear ≥ 25' REFERENCE (NFHS via Draper, LA RAP; R-019). U/S structure 36', roof 42' ASSUMED. Upper tier steps DOWN from the loop: 21" risers, front row 9.0' (7'-6" clear, D-061); highest aisle = loop 17.75' (1030.6.2.2 if smoke-protected: ≥ 32.75'; 36' U/S drawn).
- PORTAL: FREESTANDING limestone arch 30' in front of the E1 doors over Champion Walk (D-043, D-046); 50' max (D-050): crown 34', springline 22.1', depth 6' ASSUMED; underside crimson + gold trim (D-045). STRUCTURAL ENGINEER REQUIRED.
- BRAND: official mark Ø 11' (Shane, D-047) at 34.4'-45.4'; wordmark 27" caps, baseline 46.1' (inside the 44' x 50' portal) + side panel, ASSUMED sizes. Trademark search before signage / apparel OPEN (D-042).
- CHAMPION WALK: 28' x 30' brick (for now, D-046); 4x8 single name, 8x8 family / business; ≈ 3,700 4x8; pricing OPEN (D-044); may extend to parking. Bus drop: south, offset E or W (D-034).
- DOORS: symbols (6' x 8' ASSUMED) from P2-A-101 Rev I; X# EXIT ONLY (D-033); X7 on the bump-out, S1 on the annex, size TBD (D-034).
- OUTLINE (P2-A-101 Rev I): storage annex 70' x 30' on the north wall (D-067) + restroom bump-out 30' x 56' on the east wall (D-069), one storey, 16' ASSUMED. Roofs / finishes TBD.
- NOT SHOWN: rooftop units, grading, lighting.
- OPEN QUESTION: ETFE roof / solar (aspirations) — not designed, not in the SF or budget.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	EXTERIOR ELEVATIONS SCHEMATIC · COLOR	AS NOTED	October 2026	H	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-201

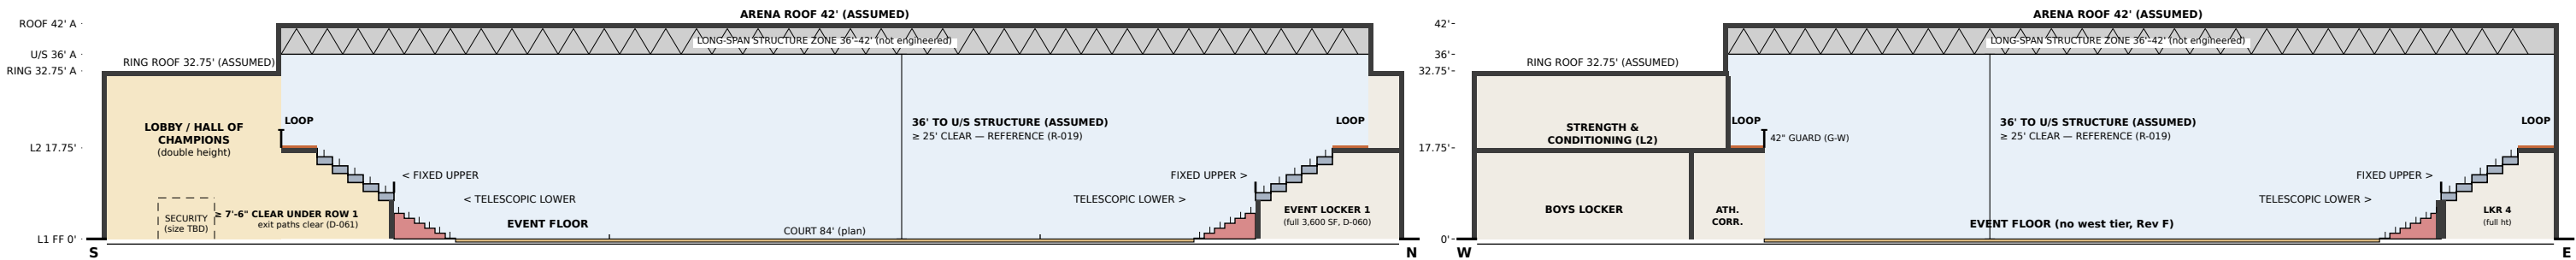


1 SECTION A-A (NORTH-SOUTH) — looking west

1/32" = 1'-0" · x = 100 (see key plan)

2 SECTION B-B (EAST-WEST) — looking north

1/32" = 1'-0" · y = 150 (see key plan)



HEIGHTS USED (ft above L1 FF 0'-0")

- L2 FF 17'-9" (D-061 DECIDED, Option B). Ring roof 32.75' = L2 + 15' — ASSUMED. Arena structure underside 36', roof 42' — ASSUMED (court clear unchanged).
- Arena clear ≥ 25' — REFERENCE (NFHS court specs via Draper; LA RAP gym standard; R-019), not a code minimum (C-5). 36' drawn = 11' over it.
- Slabs, walls, roof graphic only. Upper-tier deck structure 1.5' under each tread — ASSUMED.

SEATING (P2-A-101 Rev F)

- Lower: telescopic, 6 rows × 24", 11⅞" rise (Hussey MAXAM option, CITED; choice ASSUMED); east front 16' from the nearest mat (D-053); building 210' wide.
- Upper: fixed, 15' band, 5 rows × 36", 21"/row (D-061) = 3 aisle risers × 7", 12" treads (1030.14.2: 4-8", ≥ 11"); steps DOWN from the loop (D-049) to a 9.0' front row.
- UNDER THE UPPER TIER: row 1 clear 7.5' = 7'-6" (1003.2 minimum, no margin), rows 2-5 9.25'-14.5'. No low band: EXIT (N), EXIT (E), SE concourse, lobby / portal / athlete route are clear. Event lockers run to the tier line (3,600 SF, D-060).
- SIGHT LINES: P2-A-302 Rev C (21"/row, L2 17'-9"): seated C min 149 mm N/S, 101 mm E; standing 127 / 72 mm (lower tier governs).

GUARDS

- Loop open edges G-W (x = 56) and G-S (y = 34): 42" (IBC 2021 1015.2 / 1015.3). Upper-tier front fascia ≥ 26" (1030.17.3), 36" at aisle feet (1030.17.4).

STAIRS (ST-1..ST-4)

- 76" clear (D-052). 31 R @ 6.87" (213" + 31, ≤ 7", 1011.5.2), flights 16 + 15, 15 treads × 11" = 13.75'; 76" intermediate landing = width (1011.6, D-051); 48" floor landings. Per stair 12.67' × 24.08' = 305.1 SF per level (Rev C 270.2).
- Intermediate handrail on the centerline of each 76" stair so all width is within 30" of a rail (IBC 2021 1014.9; D-052 'with intermediate handrails') — shown in detail 4; architect to confirm (C-7).

ROOF HEIGHT (1030.6.2.2, if smoke-protected)


- Lowest roof deck ≥ 15' above the highest aisle: loop 17.75' → ≥ 32.75'. Arena U/S structure 36' drawn = 3.25' margin (deck higher). Ring roof 32.75' is over the perimeter rooms, not the seating.

ELEVATOR

- EL-1 travel 17'-9" (was 15'); hoistway / pit / overrun by the elevator supplier (not drawn).


CUTS

- A-A: x = 100, looking west. B-B: y = 150, looking north. Geometry from P2-A-101/102 Rev F. Colors graphic only; 'A' = ASSUMED.

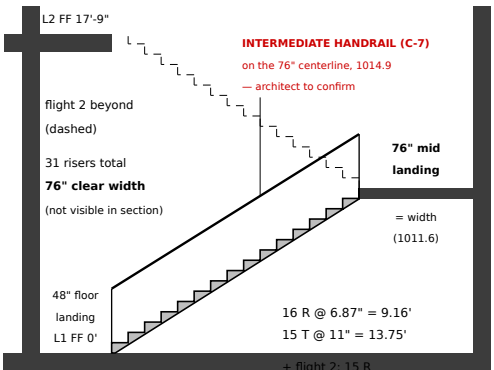

4 TYPICAL EXIT STAIR — 76" CLEAR, 31 R

3/32" = 1'-0" · 76" mid landing · 12.67' × 24.08' plan (D-061)

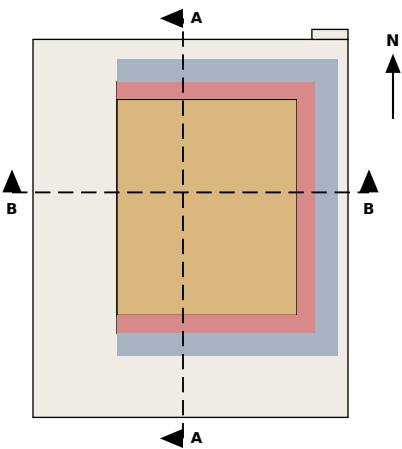


5 KEY PLAN — CUTS

1" = 128' · north up


PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	BUILDING SECTIONS SCHEMATIC · COLOR	AS NOTED	October 2026	D	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-301

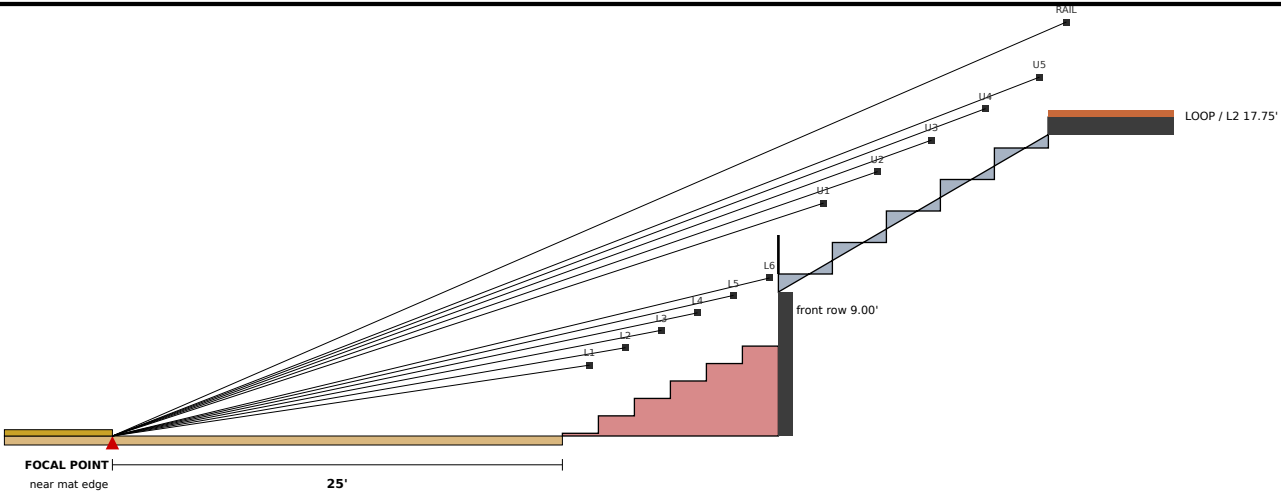


1 AS DRAWN (REV F) — NORTH / SOUTH SIDE (seated eyes)

3/32" = 1'-0" · focal 25' (10' clear + 15' table zone) · telescopic 11¼" · upper 21"/row, L2 17'-9", front 9.0'

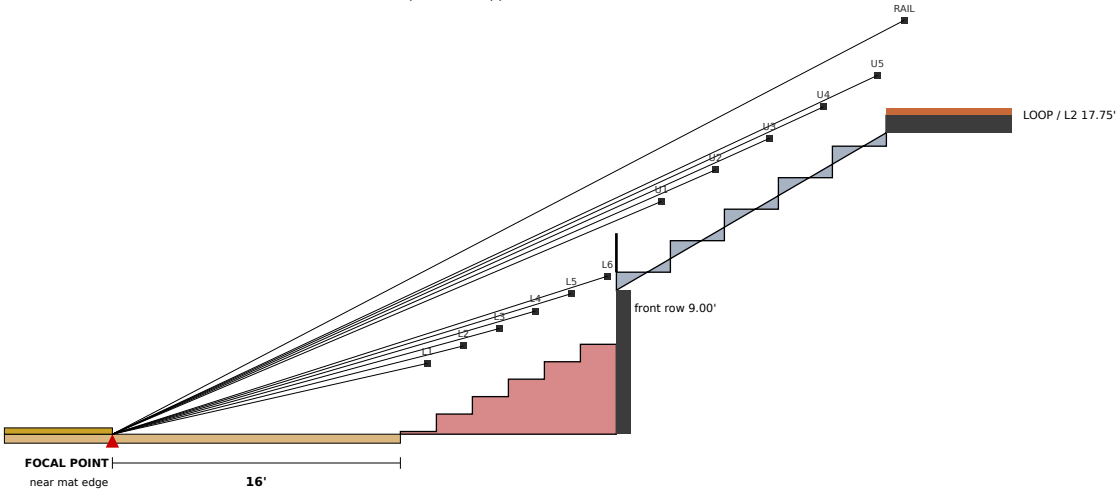

2 AS DRAWN (REV F) — EAST SIDE (seated eyes)

3/32" = 1'-0" · focal 16' (D-053) · upper 21"/row, L2 17'-9" · worst side

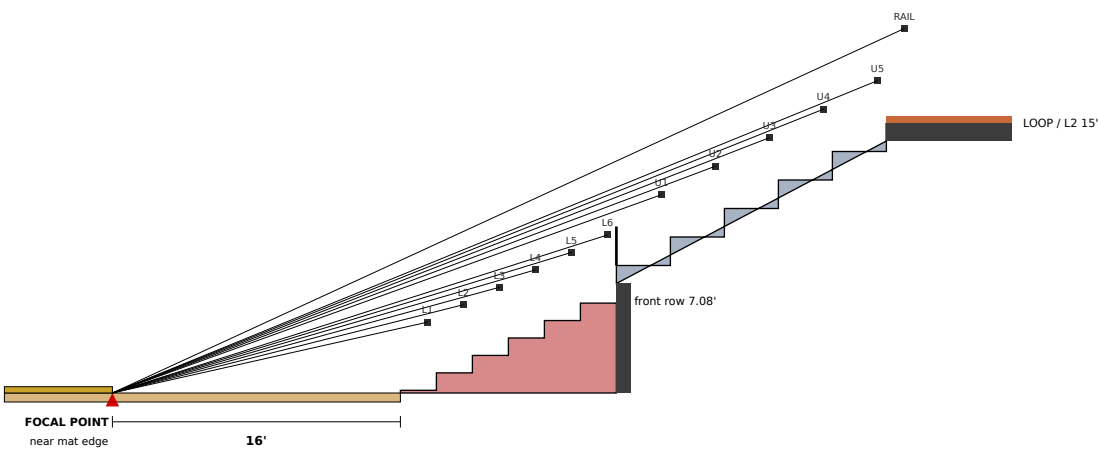

3 REV E BASIS (SUPERSEDED) — EAST SIDE (seated eyes)

3/32" = 1'-0" · focal 16' · L2 15' · upper 19"/row, front 7.08' · P2-A-302 Rev B 'as drawn'


SIGHTLINE GRADE (C, mm)

- ≥ 90 PASS
- 60-90 MARGINAL
- < 60 FAIL

Dots = eyes; label colour = C of that row over the row in front. Values: table.

4 TELESCOPIC STACK UNDER THE UPPER-TIER FRONT

3/16" = 1'-0" · recessed (Hussey) · N/S as drawn 9.0' · dashed = Rev E 7.08'

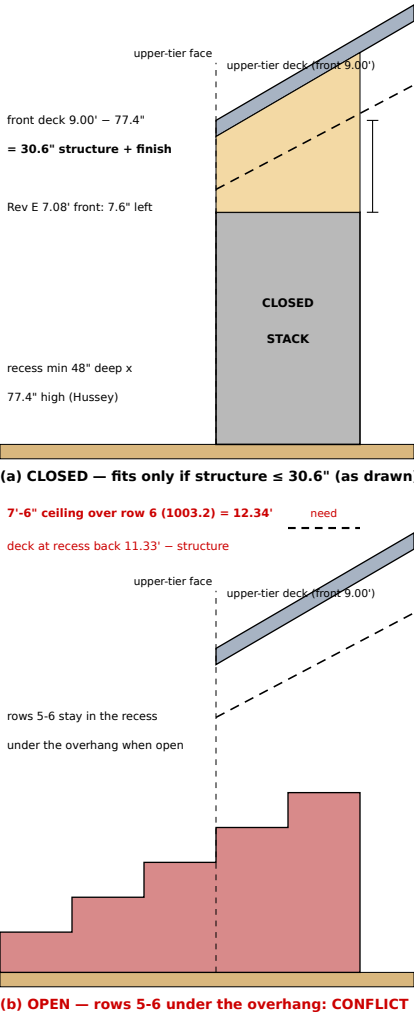

METHOD

- C = D(N + R)/(D + T) – R (Green Guide 12.3), computed from each actual eye position (also covers the step between tiers and the loop rail). Focal point = near edge of the nearest mat at floor level (Shane). Eyes: seated 1.2 m above the tread, 0.15 m forward of the row's rear edge; standing 1.6 m (5'-3") — secondary sources, see R-020. Grades: ≥ 90 mm PASS (FIFA preferred, CEN/TR 15913 new stands), 60-90 MARGINAL, < 60 FAIL (FIFA minimum 60).
- Focal distances from P2-A-101 Rev F: N and S tier fronts 25' from the nearest mat (10' clear + 15' table zone); E tier front 16' (D-053). No west tier. Section-only study (2D); corners and wheelchair positions TBD.

RESULTS — AS DRAWN (REV F, D-061 DECIDED)

- L2 FF 17'-9", upper 21" per 36" row (3 aisle risers of 7", 12" treads; IBC 1030.14.2), front row 9.0'. Every seated row PASSES: N/S ≥ 149 mm, E ≥ 101 (lower tier governs, same as Rev E). Upper tier seated N/S ≥ 179, E ≥ 105.
- Standing: N/S ≥ 127; E ≥ 72 (L4-L6 and U3-U5 MARGINAL, none FAIL). U1 clears the 26" fascia (289 mm N/S, 215 E seated).

REV E BASIS (SUPERSEDED, P2-A-302 Rev B 'as drawn')

- L2 15', 19"/row, front 7.08': same lower-tier minimums; upper seated N/S ≥ 175, E ≥ 109; standing E ≥ 81. Kept for comparison only.

TELESCOPIC STACK UNDER THE UPPER-TIER FRONT (D-049)

- Closed stack, recessed (Hussey min 4'-0" deep x 6'-5½" high) under the 9.0' front leaves 30.6" for structure + finish (1.5' = 18" ASSUMED) — FITS closed. Open: rows 5-6 still sit under the overhang (< 7'-6", 1003.2): keep the stack in front of the upper-tier face (as P2-A-301 Rev D).

EXIT PATHS (D-061 DECIDED, Option B)

- 1.5' tier structure (ASSUMED) leaves 7'-6" under row 1 (1003.2 minimum, no margin) and 9.25'+ under rows 2-5: no low band; Exit N, Exit E, SE concourse and the lobby / portal / athlete-route edge are clear. 0 seats lost.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena · Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

SIGHT-LINE STUDY
SCHEMATIC · COLOR

SCALE

AS
NOTED

DATE

October
2026

REV

C

DRAWN BY


Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-A-302


EVENT LOCKER ROOM 1 — 900 SF • 18 occ.

1/8" = 1'-0" • door on the E wall → EXIT (N) passage • common path 46 ft ≤ 75 (PASS)

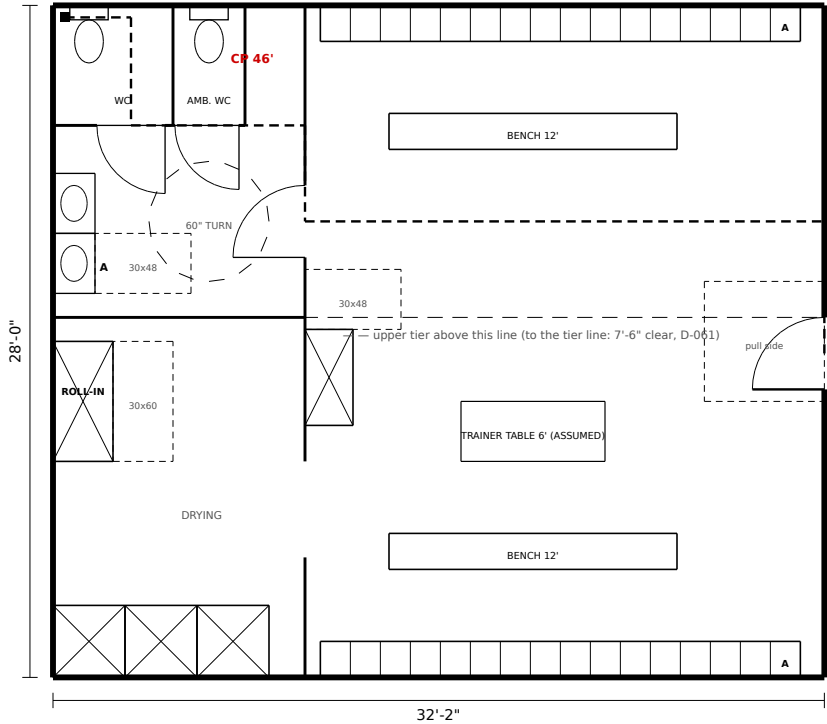


EVENT LOCKER ROOM 2 — 900 SF • 18 occ.

1/8" = 1'-0" • door on the W wall → EXIT (N) passage • common path 46 ft ≤ 75 (PASS)

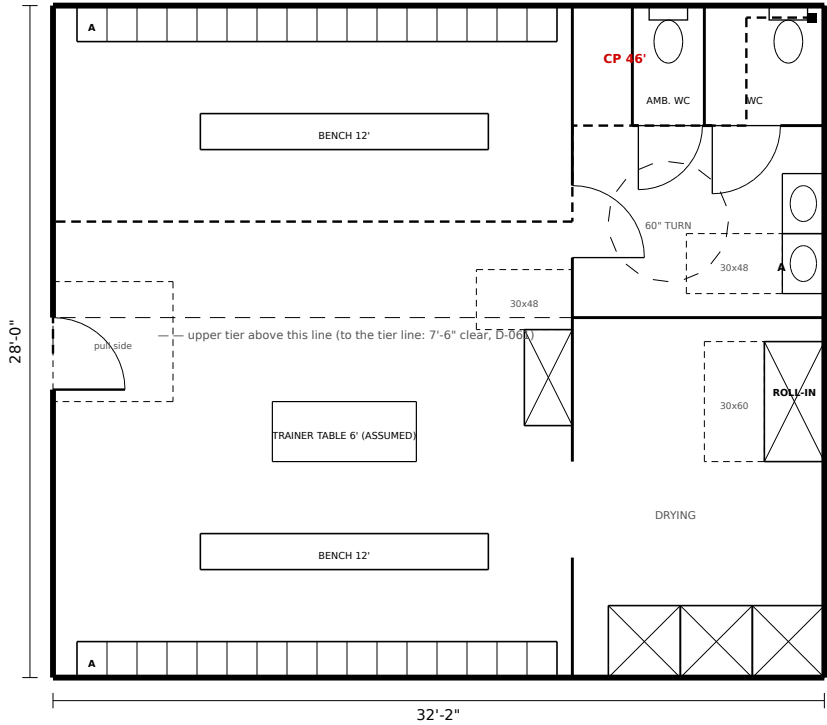


EVENT LOCKER ROOM 3 — 900 SF • 18 occ.

1/8" = 1'-0" • door on the S wall → EXIT (E) passage • common path 51 ft ≤ 75 (PASS)

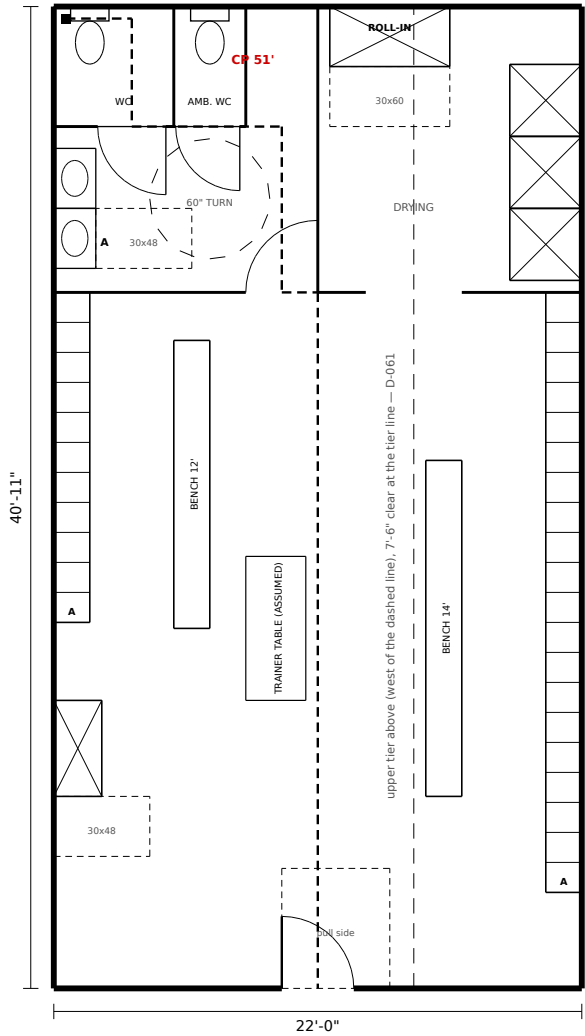


EVENT LOCKER ROOM 4 — 900 SF • 18 occ.

1/8" = 1'-0" • door on the N wall → EXIT (E) passage • common path 51 ft ≤ 75 (PASS)

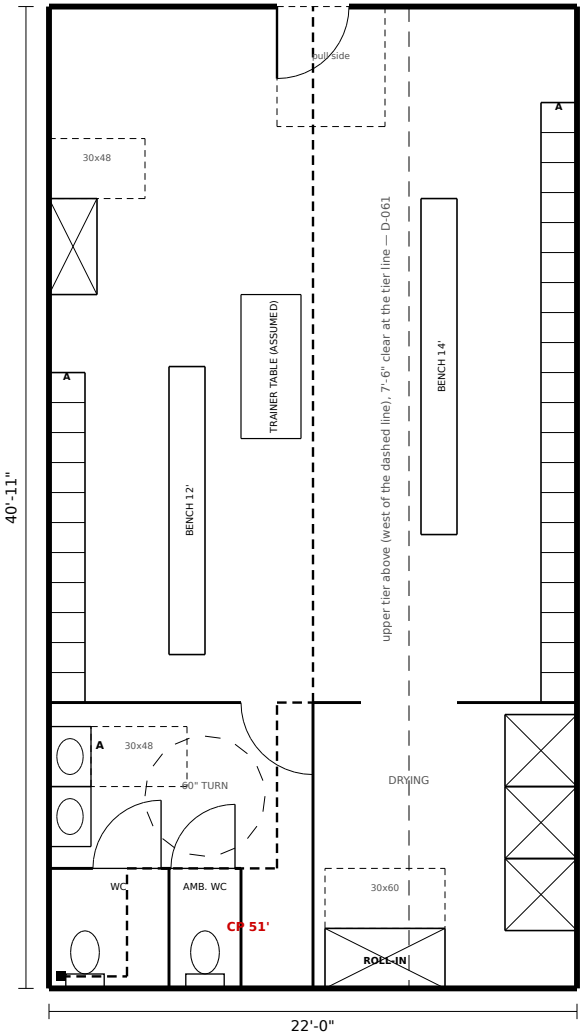

KEY PLAN — L1 (A-101 I)

1" = 250' • grey = rooms 1-4



blue = lobby core M / W + core 2

CORE 2 AREA (SF)

Men (2), 26 x 14
Women (2), 30 x 34
DF alcove + janitor, 4 x 14
Corridor = EXIT (E) passage, 30 x 8
BUMP-OUT 30 x 56 (A-101 I)

DRAWN

364
1,020
56
240
1,680

TEST-FIT NET

331.5
924

WALLS / CHASE

+9.8 %
+10.4 %
target +10 %

WHY EAST: East, not north: the north side is the back-of-house yard (service drive, S1 apron, storage annex x 52-122, X4 / X5 / ST-2 discharges); the east side is open, and the public reaches core 2 straight from the floor and the east lower tier through V2 and the 8 ft EXIT (E) passage. East concourse width and SW FLEX unchanged (D-039).

Public toilets within one storey and 500 ft of every seat (IBC 2902.3.3): PASS. Plumbing on the east side (waste / vent): MEP. Floor chair layouts must keep an aisle to V2 (core 2 is reached only through V2 / EXIT (E)).

Sources: params/phase2_enlarged.yaml, phase2_enlarged_rev_c.yaml, phase2_plan_rev_i.yaml, phase2_program.yaml (rev_k); IBC 2021 T2902.1, 2902.1.1, 2902.3.3, 1003.6, 1006.2.1, T1017.2; IPC 2021 405.3.1, 405.3.5, 424.2 (UpCodes, retrieved 2026-10-04); ADA 2010 211.2, 213.3, 304.3, 602, 604.8, 605, 606 (www.ada.gov); D-039, D-064, D-068, D-069; Shane 2026-10-04 3:31 PM CT.

Schematic enlarged plans: fixture counts, benches, lockers and showers ASSUMED (KEYSTONE). Accessible fixture sizes are ADA 2010 minimums for the architect to develop; not a code review (D-008).

COMMON PATH — VERIFIED ON THIS LAYOUT (T1006.2.1)

One exit access doorway allowed when the space holds ≤ 49 occupants and the common path of egress travel is ≤ 75 ft (Group A, sprinklered) — IBC 2021 1006.2.1, Table 1006.2.1.

ROOM	OCC.	WORST POINT	CP ft	RESULT	+ TO EXIT
1	18	accessible WC far corner	45.6	≤ 75 PASS	X5 64 ft
2	18	accessible WC far corner	45.6	≤ 75 PASS	X5 64 ft
3	18	accessible WC far corner	50.9	≤ 75 PASS	X7 96 ft
4	18	accessible WC far corner	50.9	≤ 75 PASS	X7 96 ft

Rooms 1-4 unchanged (Rev A approved, D-068). Rooms 3-4 now reach X7 through the bump-out corridor (+30 ft): travel ≤ 96 ft vs 250 ft (T1017.2). Locker fixtures as Rev A / B (ADA 604.8, 606, 608, 803, 811, 903).

L1 PUBLIC RESTROOMS — CHAIRS-ONLY (D-064 • D-069 DECIDED, OPTION 2)


Shane 3:31 PM CT: second restroom pair in a one-storey bump-out opposite the lobby core. L1 load chairs-only 2,346 + 1,100 = 3,446 (IBC 2021 T2902.1, 50/50 split 2902.1.1). Lobby core = rooms 4 + 5 as drawn; core 2 = the rest.

FIXTURE	REQ.	LOBBY	CORE 2	TOTAL	RESULT
Men WC (incl. urinals)	22	10	5 + 7 ur	22	PASS
Men lavatories	9	4	5	9	PASS
Women WC	42	18	24	42	PASS
Women lavatories	12	5	7	12	PASS
Drinking fountains	4	2	2 (hi-lo)	4	PASS

Urinals: core 2 7 ≤ 8 = 67 % of its 12 (IPC 2021 424.2: "urinals shall not be substituted for more than 67 percent of the required water closets in assembly and educational occupancies", R-009). 1 accessible urinal (ADA 213.3.3, 605); 1 wheelchair + 1 ambulatory compartment per room (213.3.1, 604.8); 1 accessible lav (606); 60 in turning space (304.3); hi-lo fountains (211.2, 602).

RESTROOM CORE 2 — EAST BUMP-OUT (D-069) • ENLARGED PLAN

1/16" = 1'-0" • plan turned: north → right, building wall (x 210) on top · 30 x 56 = 1,680 SF, one storey

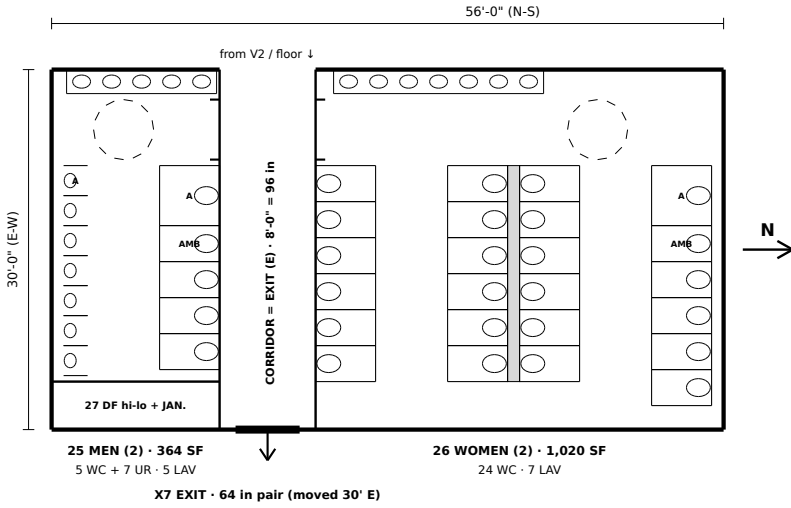

X7 EXIT • 64 in pair (moved 30' E)

A = accessible • AMB = ambulatory • dashed circle = 60 in turning space • grey = chase • ticks = room entry

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT

Hazel Green Regional Athletic Complex
Trojan Horse Arena • Hazel Green area, Madison
County, Alabama (site TBD, D-006)

PHASE

PHASE 2

SHEET TITLE

ENLARGED PLANS
LOCKER RMS + RESTROOM
CORE 2

SCALE

AS
NOTED

DATE

October
2026

REV

C

DRAWN BY


Drawn by KEYSTONE (AI) for
Shane Brazelton

SHEET

P2-A-401


V1 AERIAL FROM SOUTHWEST

axonometric · not to scale

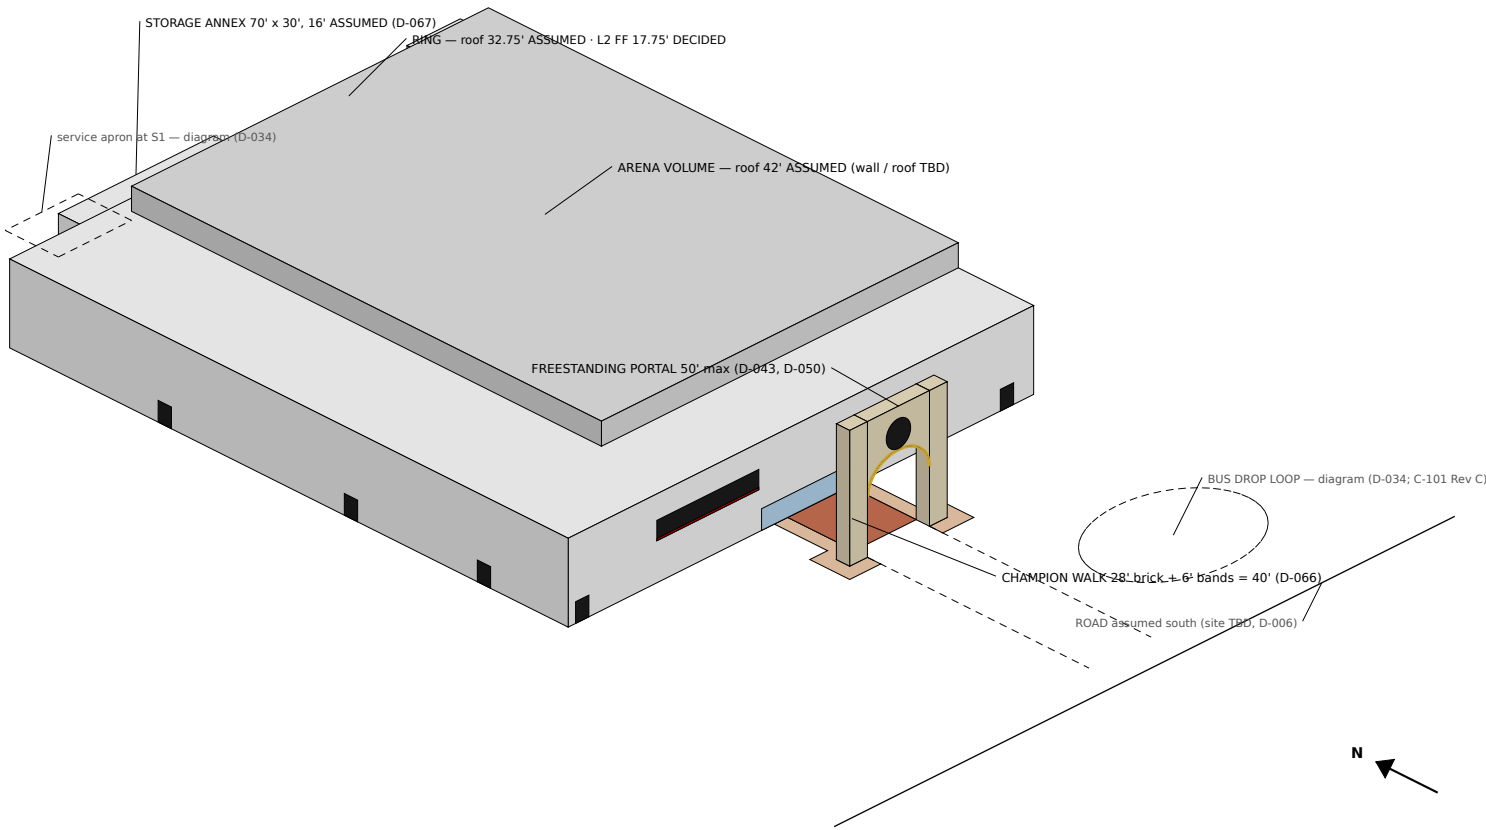


V2 CUTAWAY AT L2 FF 17'-9" FROM SOUTHWEST — ROOFS REMOVED

axonometric · not to scale · roofs removed, L1 ring cut solid at L2 FF

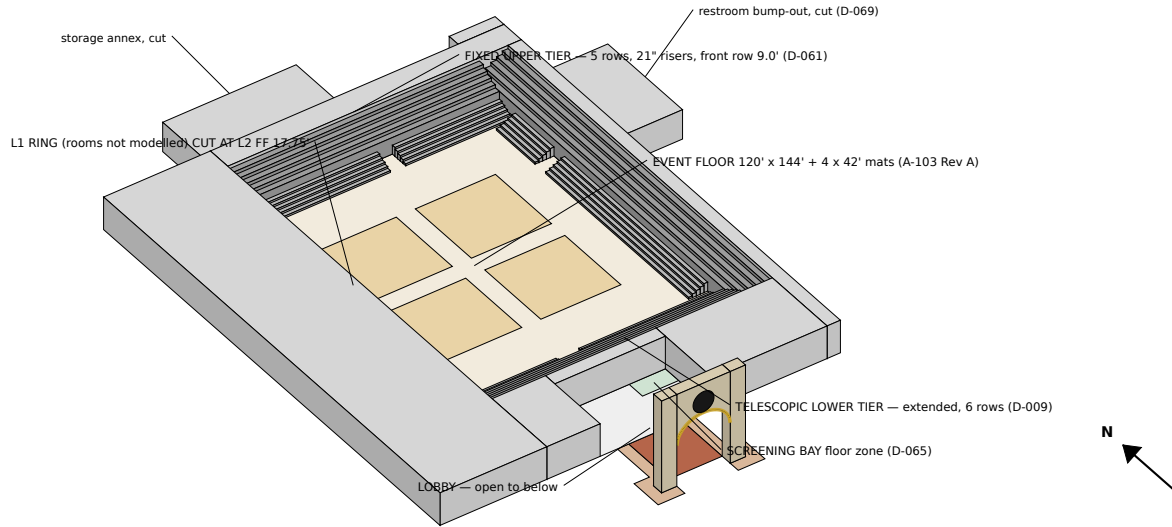


V3 AERIAL FROM SOUTHEAST

axonometric · not to scale

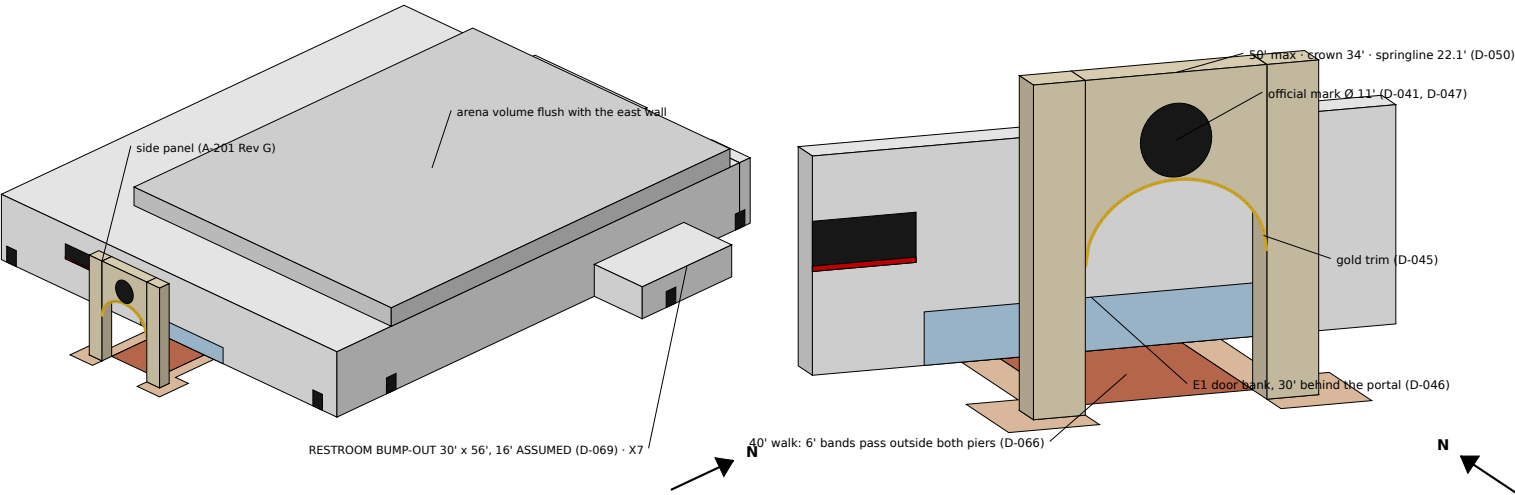


V4 AERIAL FROM NORTHWEST (SERVICE SIDE, S1)

axonometric · not to scale

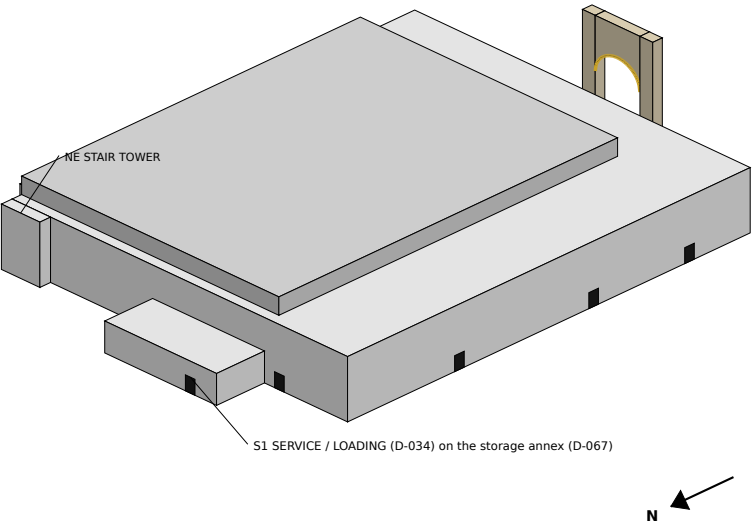

V5 PORTAL + CHAMPION WALK FROM SOUTH-SOUTHWEST

axonometric · not to scale

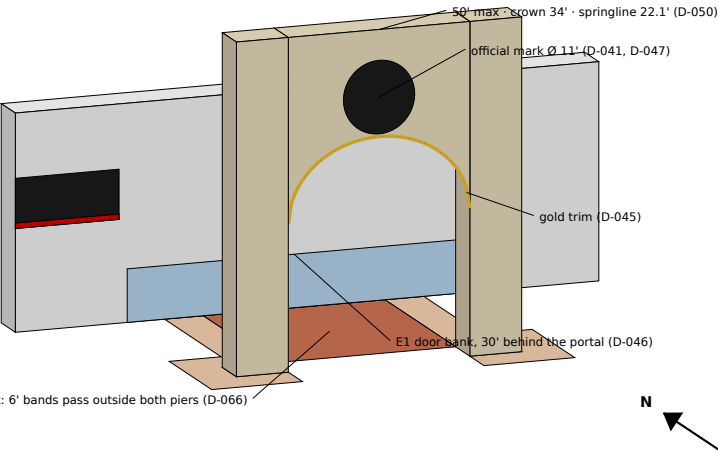

MASSING ONLY. Volumes from the current schematic params; materials, openings, parapets, roof equipment and structure are not designed. Every height not marked DECIDED is ASSUMED (P2-A-201 Rev G). Not a rendering of a final design.

HEIGHTS MODELLED

L2 FF 17.75' DECIDED (D-061) · ring roof 32.75' ASSUMED · arena roof 42' ASSUMED (P2-A-201 Rev G) · portal 50' max, crown 34', springline 22.1' (D-050) · tiers per P2-A-301 Rev D / A-302 Rev C. Door symbols 6' x 8' ASSUMED.

DECISIONS MODELLED — SHANE 3:31 PM CT

- D-054 DECIDED: chairs-only floor is the design case — no stage / chairs modelled (layout TBD).
- D-065 DECIDED: screening bay in the lobby's east side, shown as a floor zone in the cutaway.
- D-066 DECIDED: 40 ft walk = 28 ft brick + 6 ft bands, around both portal piers.
- D-067 DECIDED: storage annex 70 x 30 ft on the north wall, one storey (16 ft ASSUMED), S1 on its north face.
- D-069 DECIDED: restroom core 2 in a one-storey bump-out 30 x 56 ft on the east wall at V2 (16 ft ASSUMED), X7 on its east face.

NOTES

- NOT MODELLED: parapets (TBD), rooftop units, structure, windows / cladding, grading, landscaping, lighting, parking (site TBD, D-006), signage content (signage zone TBD), interior rooms.
 - Colours: limestone / crimson / gold / brick / brand red + black from P2-A-201 Rev G finishes (hex ASSUMED swatches); greys = material TBD. Arch drawn as a 56-segment polyline; the crimson underside faces down and does not show in views from above.
 - Model file: phase2/out/3d/P2-A-901_RevC_massing.obj + .mtl (feet, Y-up export; exterior, cutaway and portal sets).
- Sources: params/phase2_massing.yaml, phase2_massing_rev_c.yaml; phase2_plan_rev_i.yaml; phase2_elev_rev_g.yaml; phase2_elev.yaml; phase2_site.yaml (rev_e); phase2_sect.yaml; D-034, D-043, D-045, D-046, D-050, D-054, D-061, D-065 to D-067, D-069; Shane 2026-10-04 3:31 PM CT. P2-A-201 Rev H shows the annex + bump-out.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	PHASE 2	3D MASSING MODEL VIEWS	NTS	October 2026	C	Drawn by KEYSTONE (AI) for Shane Brazelton	P2-A-901