

SOUTH PORTAL — LIMESTONE ARCH

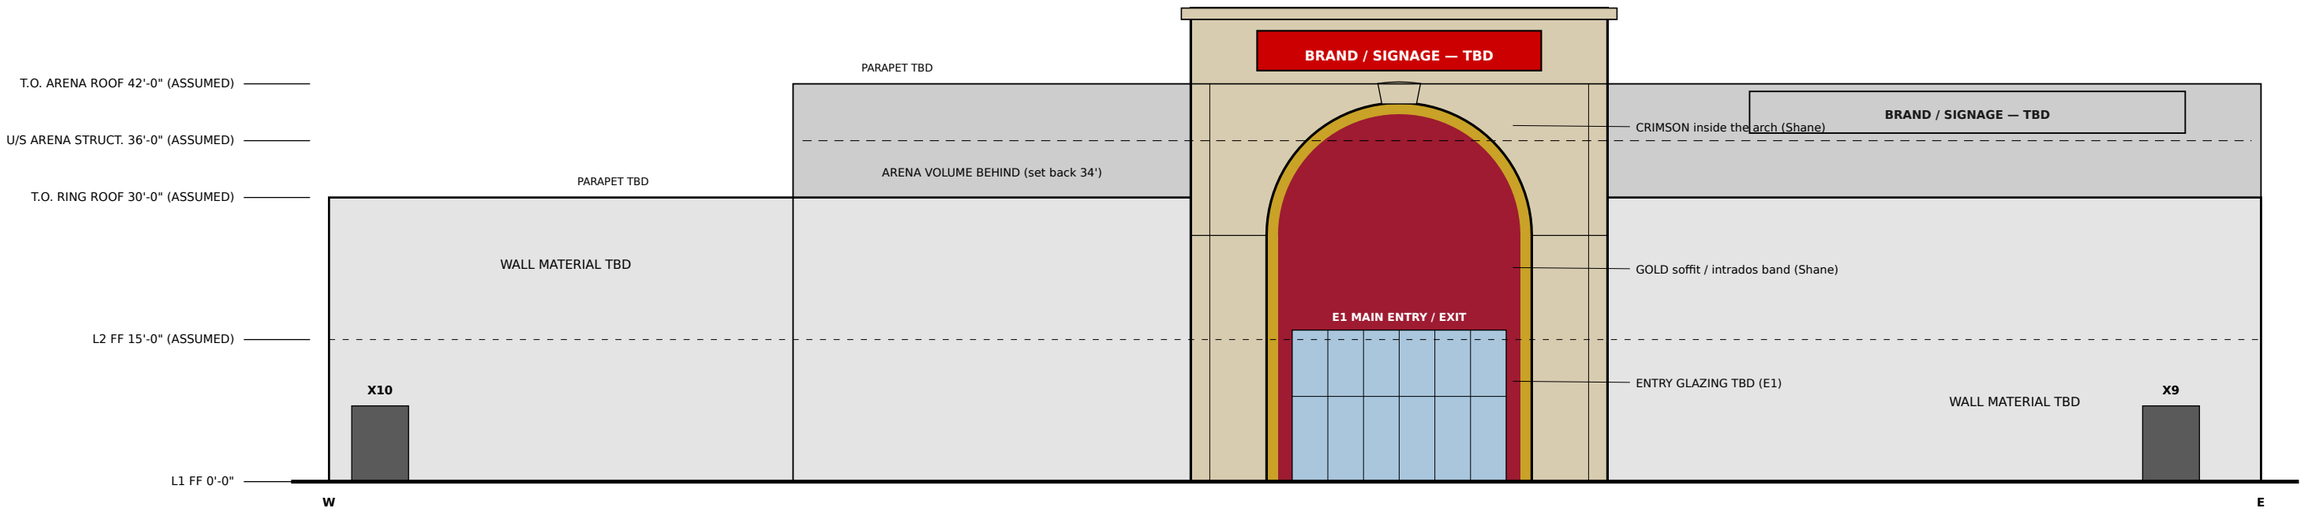


SOUTH ELEVATION (PRIMARY) — SCALE 1/16" = 1'-0"


portal 44' w x 50' h, 28' arch, crown 40' (ASSUMED, render proportions) · W ← → E

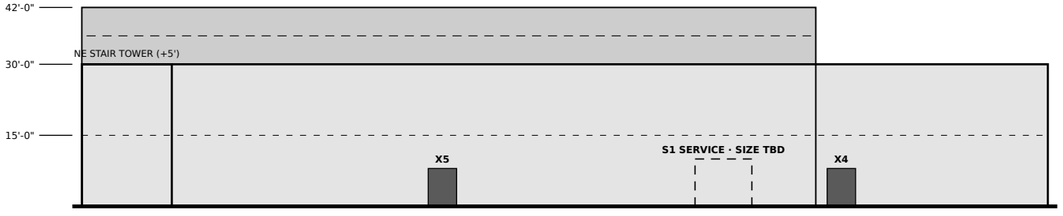

NORTH ELEVATION — 1/32" = 1'-0" (E ← → W)

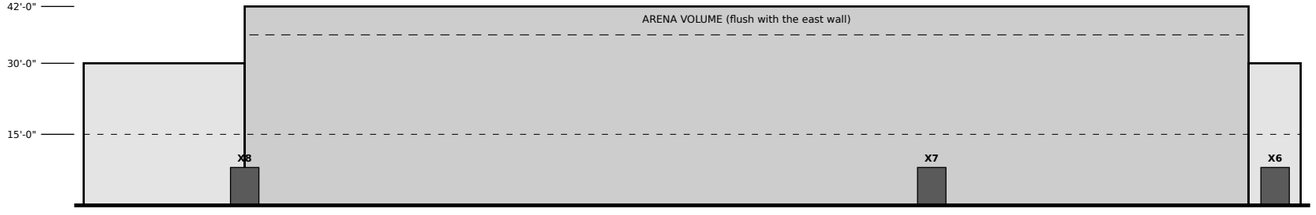

EAST ELEVATION — 1/32" = 1'-0" (S ← → N)

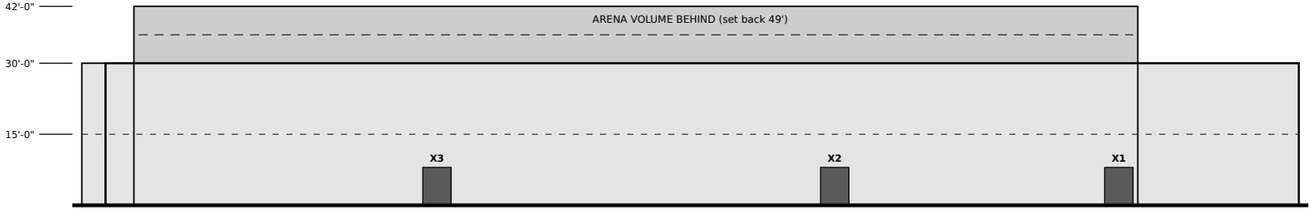

WEST ELEVATION — 1/32" = 1'-0" (N ← → S)

FINISHES

- LIMESTONE (portal) — Shane (material)
- CRIMSON (inside the arch) — Shane (color)
- GOLD (arch soffit) — Shane (color)
- BRAND RED — Shane (red/black brand)
- BRAND BLACK — as brand red
- WALL MATERIAL TBD — TBD
- ARENA VOLUME — WALL / ROOF TBD — TBD
- ENTRY GLAZING (TBD) — TBD

NOTES

- HEIGHTS: L2 FF 15' (R-015) and ring roof 30' are ASSUMED. Arena clear ≥ 25' over the court (NFHS court specs via Draper; LA RAP gym standard; R-019). U/S arena structure 36' and roof 42' ASSUMED (≈ 15' over an assumed 21' top aisle, IBC 1030.6.2.2 if smoke-protected). Parapet TBD.
- PORTAL: limestone, crimson inside the arch, gold soffit (Shane). Size ASSUMED from his render's proportions; projects south of the façade, depth TBD.
- BRAND: placeholders only — no school logo (Phase 2 is Shane's build, D-028). HGHS badge? OPEN (D-040).
- DOORS: symbols (6' x 8' ASSUMED) from P2-A-101 Rev D; X# EXIT ONLY (D-033); S1 size TBD (D-034).
- NOT SHOWN: ETFE roof / solar (aspirations), rooftop units, grading, lighting.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**EXTERIOR ELEVATIONS** **SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**A**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-201**